

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised August 1, 2011

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-015-28906
5. Indicate Type of Lease STATE ☒ FEE ☐
6. State Oil & Gas Lease No. K-5017
7. Lease Name or Unit Agreement Name Todd 2 State
8. Well Number: 3
9. OGRID Number 4323
10. Pool name or Wildcat Ingle Wells, Delaware

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)	
1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐	
2. Name of Operator Chevron USA, Inc.	
3. Address of Operator 6301 Deauville Blvd., Midland, TX 79706	
4. Well Location Unit Letter <u>P</u> : <u>660</u> feet from the <u>SOUTH</u> line and <u>660</u> feet from the <u>EAST</u> line Section <u>2</u> Township <u>24S</u> Range <u>31E</u> NMPM County <u>Eddy</u>	
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3501' GR	

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
PERFORM REMEDIAL WORK ☐	PLUG AND ABANDON ☐	REMEDIAL WORK ☐	ALTERING CASING ☐
TEMPORARILY ABANDON ☒	CHANGE PLANS ☐	COMMENCE DRILLING OPNS. ☐	P AND A ☐
PULL OR ALTER CASING ☐	MULTIPLE COMPL ☐	CASING/CEMENT JOB ☐	
DOWNHOLE COMMINGLE ☐			
OTHER: ☐		OTHER: <u>TEMPORARILY ABANDON</u> ☒	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion. 11 3/4" 42# @ 400': TOC @ surface; 8 5/8" 23# @ 4350': TOC @ surface; 5 1/2" 17# @ 8511': TOC @ 3566'

temporarily
Chevron USA INC respectfully request to abandon this well as follows:

1. MIRU, N/U BOPE, POOH w/ all rods & tubing.
2. Set CIBP @ 7300', circulate well w/ 9.5 ppg gel KCl water, and pressure test casing t/ 500 psi for 10 min - charted.
3. Spot 25 sx CL "C" cement plug f/ 7300' t/ 7050'.
4. Perform ~~H-15 test~~ MIT TEST. OCD TO WITNESS.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE [Signature] TITLE Well Abandonment Engineer DATE 11/27/2017

Type or print name Nick Glann E-mail address: nglann@chevron.com PHONE: 432-687-7786
For State Use Only

APPROVED BY: Ronald Inge TITLE COMPLIANCE OFFICER DATE 11/28/17
Conditions of Approval (if any):

TA status may be granted after a successful MIT test is performed.
Contact the OCD to schedule the test so it may be witnessed.

LAST PRESS 11/1/2016

**CURRENT
WELLBORE DIAGRAM**

Lease: Todd 2 State Well No: 3 API: 30-015-28906 Chev No.: BK8870
 Location: Sec: 2 Blk: Survey: TS
 County: Eddy State: New Mexico LAT 32.2409668 LONG -103.7421799
 Field: Ingle Wells WBS: Cost Center UCRE70820
 Directions to Wellsite:

CURRENT

Surface CASING

Size 11 3/4
 Wt 42 WC40
 Set @ 400
 Sxs cmt 400 sks
 Cmt Date 4/25/96
 Circ Yes
 TOC Surface

Intermediate CASING

Size 8 5/8
 Wt 23# M-50
 Set @ 4398
 Sxs cmt 2386 sks
 Cmt Date 5/16/96
 Circ Yes
 Hole Size 11
 TOC Surface

PRODUCTION CASING

Size 5 1/2
 Wt 17# J 55
 Set @ 8511
 Sxs cmt 1460 sks
 Cmt Date 5/24/96
 Circ No

Hole Size 7 7/8


DV Tool 5491'

TOC 3566'

Geologic Tops

Rustler 731
 Salado 1100
 Base of Salt 4242
 Lamar 4470
 Bell Canyon 4505
 Cherry Cnyn 5400
 Brushy Cnyn 6615
 Bone Spring 8324

PBTD 8 465
 TD 8 511

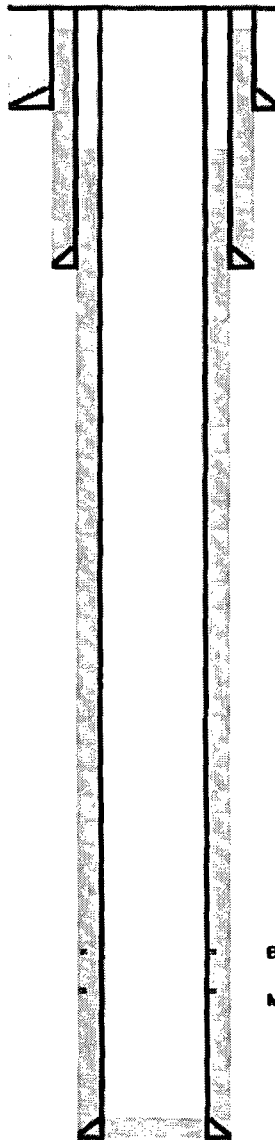

KB 3 520
 GL 3 501
 Spud Date 4/25/1996
 Compl Date 6/11/1996

Tubing Strings									
Tubing Description		Run Date		Run Job		Set Depth (TVD, 100')		Set Depth (TVD, 100')	
N		4/10/2015		Tubing Repair		8 300 0			
Run Date		Run Job		Run Date		Run Job		Run Date	
4/10/2015		4/10/2015		4/10/2015		4/10/2015		4/10/2015	
Jls	Ann Dis	OD (in)	ID (in)	Wt (lb/ft)	Grade	Top Trips	Len (ft)	Top (TVD)	Bot (TVD)
227	TBG L80 6.5#	2 7/8	2 441	6.50	L-80		7 167 1	19 0	7 185 1
1	MARKER SUB L80 6.5#	2 7/8	2 441	6.50	L-80		4 10	7 185 1	7 190 2
2	TBG L80 6.5#	2 7/8	2 441	6.50	L-80		66 36	7 190 2	7 256 6
1	TAC	2 7/8	2 441				2 70	7 256 6	7 258 3
29	TBG L80 6.5#	2 7/8	2 441	6.50	L-80		918 40	7 258 3	8 176 7
2	TBG L80 6.5# TIC-99	2 7/8	2 441	6.50	L-80		66 11	8 176 7	8 241 8
1	SS MECH SN W/ DIP TUBE ATTACHED	2 7/8	0 000				1 10	8 241 8	8 242 9
1	TBG SUBS L80 6.5#	2 7/8	2 441	6.50	L-80		4 10	8 242 9	8 247 0
1	CAVINS DESANDE R	2 7/8	0 000				19 24	8 247 0	8 266 2
1	MAJ	2 7/8	0 000				32 76	8 266 2	8 299 9
1	DUMP VALVE	2 7/8	0 000				1 00	8 299 9	8 300 0

ROD DETAIL(Run in Hole)

Size	Manufacturer	No. of Rods	Length	Grade
1 5	HF SPRAYED METAL POLISH ROD	1	26	C
7/8	ROD SUB 97	1	4	B
7/8	NORRIS 97	128	3200	B
3/4	NORRIS 97	185	4625	B
1/1/2	K-BARS	15	375	B
7/8	ROD SUB 97	1	4	A
2 1/2	PUMP	1	20	A

25-125-RHBC-20-4

Brushy Canyon: 8112-36 (48 holes); 1000 gals 15%; 77,500 gals x-link; 200,000# 16/30

Mesa Verde: 7346-7360 (29 holes); 1300 gals 7 1/2%; 25,000 gals x-link; 50,000# RC 16/30

**CURRENT
WELLBORE DIAGRAM**

Lease: Todd 2 State Well No: 3 API: 30-015-28906 Chev No.: BK887D
 Location: _____ Sec: 2 Blk: _____ Survey: TS
 County: Eddy State: New Mexico LAT: 32.2409668 LONG: -103.7421799
 Field: Ingle Wells WBS: _____ Cost Center: UCRE70820
 Directions to Wellsite: _____

PROPOSED - TA

Surface CASING

Size: 11 3/4
 Wt.: 42, WC40
 Set @: 400
 Sxs cmt: 400 sxs
 Cmt Date: 4/25/96
 Circ: Yes
 TOC: Surface

Intermediate CASING

Size: 8 5/8
 Wt.: 23#, M-50
 Set @: 4398
 Sxs Cmt: 2386 sxs
 Cmt Date: 5/16/96
 Circ: yes
 Hole Size: 11
 TOC: Surface

PRODUCTION CASING

Size: 5 1/2
 Wt.: 17#, J-55
 Set @: 8511
 Sxs Cmt: 1460 sxs
 Cmt Date: 5/24/96
 Circ: No

Hole Size: 7 7/8


DV Tool: 6491'

TOC: 3566'

Geologic Tops

Rustler: 731'
 Salado: 1100'
 Base of Salt: 4242'
 Lamar: 4470'
 Bell Canyon: 4505'
 Cherry Cnyn: 5400'
 Brushy Cnyn: 6615'
 Bone Spring: 8324'

PBTD: 8,460
 TD: 8,511

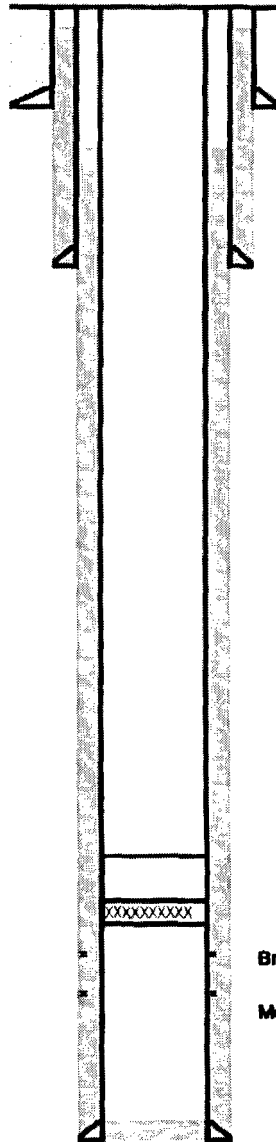

KB: 3,520
 GL: 3,501
 Spud Date: 4/25/1996
 Compl. Date: 6/11/1996

C.B.P @ 7300 w/ 25 sx Class C cement on top // 7300' V 7050

Brushy Canyon: 8112-36 (48 holes); 1000 gals 15%; 77,500 gals x-link; 200,000# 16/30

Mesa Verde: 7346-7360 (29 holes); 1300 gals 7 1/2%; 25,000 gals x-link; 50,000# RC 16/30