

# EOG Resources, Inc.

30-015-35369

## Legals:

Potomac "A" 9 Fee #1H

290' FNL & 200' FEL

760' FNL & 660' FWL

Section 9 South Township Survey

Well # 1H



Surface Lat: N.32.9440229'

Surface Long: W.104.4818664'

Eddy County, New Mexico

9-16-25

# H<sub>2</sub>S

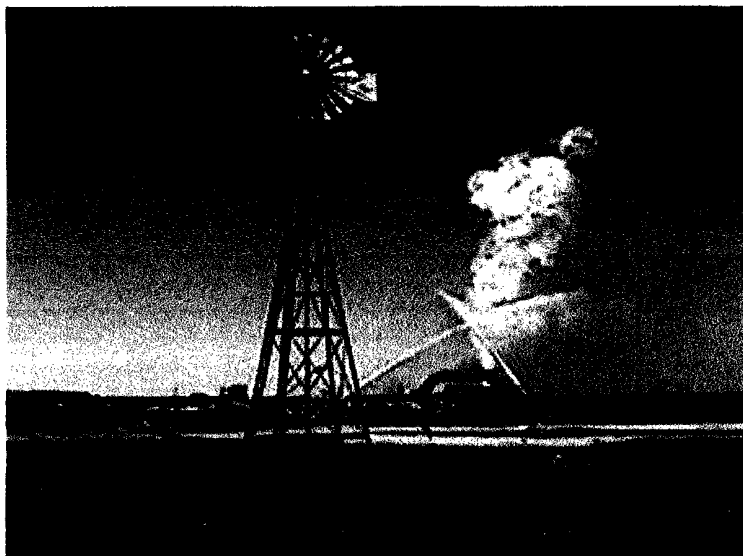

CALLAWAY SAFETY EQUIPMENT CO, INC.

1020 W. Hwy. 80 East  
Odessa, Texas 79765

(432) 561-5049

3229 Industrial Drive

Hobbs, New Mexico 88240

(877) 422-6345

(505) 392-2973

## **TABLE OF CONTENTS**

### **I. H2S Contingency Plan**

- A. Scope
- B. Objective
- C. Discussion of Plan

### **II. Emergency Procedures**

- A. Emergency Procedures
- B. Emergency Reaction Steps
- C. Simulated Blowout Control Drills

### **III. Ignition Procedures**

- A. Responsibility
- B. Instructions

### **IV. Training Requirements**

### **V. Emergency Equipment**

### **VI. Check Lists**

- A. Status Check List
- B. Procedural Check List

### **VII. Briefing Procedures**

### **VIII. Evacuation Plan**

- A. General Plan
- B. Emergency Phone Lists

### **IX. Maps and Plats**

- A. Location Plat
- B. Map to Location
- C. Radius of Exposure

### **X. General Information**

- A. Drilling/Re-entry Permits
- B. H-9 Permit
- C. H2s Permissible Limits

- D. Toxicity Table
- E. Physical Properties
- F. Respirator Use
- G. Emergency Rescue

## H<sub>2</sub>S CONTINGENCY PLAN SECTION

### **Scope:**

This contingency plan provides an organized plan of action for alerting and protecting the public within an area of exposure prior to an intentional release, or following the accidental release of a potentially hazardous volume of hydrogen sulfide. The plan establishes guidelines for all personnel whose work activity may involve exposure to Hydrogen Sulfide Gas (H<sub>2</sub>S).

### **Objective:**

Prevent any and all accidents, and prevent the uncontrolled release of H<sub>2</sub>S into the atmosphere.

Provide proper evacuation procedures to cope with emergencies.

Provide immediate and adequate medical attention should an injury occur.

### **Discussion of Plan:**

#### ***Suspected Problem Zones:***

***Implementation:*** This plan, with all details, is to be fully implemented 1000' before drilling into the first sour zone.

***Emergency Response Procedure:*** This section outlines the conditions and denotes steps to be taken in the event of an emergency.

***Emergency Equipment and Procedure:*** This section outlines the safety and emergency equipment that will be required for the drilling of this well.

***Training Provisions:*** This section outlines the training provisions that must be adhered to 1000' before drilling into the first sour zone.

***Emergency call lists:*** Included are the telephone numbers of all persons that would need to be contacted, should an H<sub>2</sub>S emergency occur.

***Briefing:*** This section deals with the briefing of all persons involved with the drilling of this well.

***Public Safety:*** Public Safety Personnel will be made aware of the drilling of this well.

**Check Lists:** Status check lists and procedural check lists have been included to ensure adherence to the plan.

**General Information:** A general information section has been included to supply support information.

## EMERGENCY PROCEDURES SECTION

- I. In the event of any evidence of H<sub>2</sub>S level above 10 ppm, take the following steps immediately:
  - A. Secure breathing apparatus.
  - B. Order non-essential personnel out of the danger zone.
  - C. Take steps to determine if the H<sub>2</sub>S level can be corrected or suppressed, and if so, proceed with normal operations.
- II. If uncontrollable conditions occur, proceed with the following:
  - A. Take steps to protect and/or remove any public downwind of the rig, including partial evacuation or isolation. Notify necessary public safety personnel and the N.M. Railroad Commission of the situation.
  - B. Remove all personnel to the Safe Briefing Area.
  - C. Notify public safety personnel for help with maintaining roadblocks and implementing evacuation.
  - D. Determine and proceed with the best possible plan to regain control of the well. Maintain tight security and safety measures.
- III. Responsibility:
  - A. The Company Approved Supervisor shall be responsible for the total implementation of the plan.
  - B. The Company Approved Supervisor shall be in complete command during any emergency.
  - C. The Company Approved Supervisor shall designate a back up Supervisor in the event that he/she is not available.

## **EMERGENCY PROCEDURE IMPLEMENTATION**

### **I. Drilling or Tripping**

#### **A. All Personnel**

1. When alarm sounds, don escape unit and report to upwind Safe Briefing Area.
2. Check status of other personnel (buddy system).
3. Secure breathing apparatus.
4. Wait for orders from supervisor.

#### **B. Drilling Foreman**

1. Report to the upwind Safe Briefing Area.
2. Don Breathing Apparatus and return to the point of release with the Tool Pusher or Driller (buddy system).
3. Determine the concentration of H<sub>2</sub>S.
4. Assess the situation and take appropriate control measures.

#### **C. Tool Pusher**

1. Report to the upwind Safe Briefing Area.
2. Don breathing apparatus and return to the point of release with the Drilling Foreman or the Driller (buddy system).
3. Determine the concentration.
4. Assess the situation and take appropriate control measures.

#### **D. Driller**

1. Check the status of other personnel (in a rescue attempt, always use the buddy system).
2. Assign the least essential person to notify the Drilling Foreman and Tool Pusher, in the event of their absence.

3. Assume the responsibility of the Drilling Foreman and the Tool Pusher until they arrive, in the event of their absence.

**E. Derrick Man and Floor Hands**

1. Remain in the upwind Safe Briefing Area until otherwise instructed by a supervisor.

**F. Mud Engineer**

1. Report to the upwind Safe Briefing Area.
2. When instructed, begin check of mud for pH level and H<sub>2</sub>S level.

**G. Safety Personnel**

1. Don Breathing Apparatus.
2. Check status of all personnel.
3. Wait for instructions from Drilling Foreman or Tool Pusher.

**II. Taking a Kick**

- A. All personnel report to the upwind Safe Briefing Area.
- B. Follow standard BOP procedures.

**III. Open Hole Logging**

- A. All unnecessary personnel should leave the rig floor.
- B. Drilling Foreman and Safety Personnel should monitor the conditions and make necessary safety equipment recommendations.

**IV. Running Casing or Plugging**

- A. Follow "Drilling or Tripping" procedures.
- B. Assure that all personnel have access to protective equipment.



## **SIMULATED BLOWOUT CONTROL DRILLS**

All drills will be initiated by activating alarm devices (air horn). One long blast, on the air horn, for ACTUAL and SIMULATED Blowout Control Drills. This operation will be performed by the Drilling Foreman or Tool Pusher at least one time per week for each of the following conditions, with each crew:

Drill # 1      Bottom Drilling

Drill # 2      Tripping Drill Pipe

In each of these drills, the initial reaction time to shutting in the well shall be timed as well as the total time for the crew to complete its entire pit drill assignment. The times must be recorded on the IADC Driller's Log as "Blowout Control Drill".

Drill No.:

Reaction Time to Shut-In:                      minutes,                      seconds.

Total Time to Complete Assignment:                      minutes,                      seconds.

### **I. Drill Overviews**

#### **A. Drill No. 1- Bottom Drilling**

1. Sound the alarm immediately.
2. Stop the rotary and hoist kelly joint above the rotary table.
3. Stop the circulatory pump.
4. Close the drill pipe rams.
5. Record casing and drill pipe shut-in pressures and pit volume increases.

#### **B. Drill No. 2 – Tripping Drill Pipe**

1. Sound the alarm immediately.
2. Position the upper tool joint just above the rotary table and set the slips.

3. Install a full opening valve or inside blowout preventor tool in order to close the drill pipe.
4. Close the drill pipe rams.
5. Record the shut-in annular pressure.

## **II. Crew Assignments**

### **A. Drill No. 1 – Bottom Drilling**

1. Driller
  - a) Stop the rotary and hoist kelly joint above the rotary table.
  - b) Stop the circulatory pump.
  - c) Check flow.
  - d) If flowing, sound the alarm immediately.
  - e) Record the shut-in drill pipe pressure.
  - f) Determine the mud weight increase needed or other courses of action.
2. Derrickman
  - a) Open choke line valve at BOP.
  - b) Signal Floor Man # 1 at accumulator that choke line is open.
  - c) Close choke and upstream valve after pipe tams have been closed.
  - d) Read the shut-in annular pressure and report readings to Driller.
3. Floor Man # 1
  - a) Close the pipe rams after receiving the signal from the Derrickman.
  - b) Report to Driller for further instructions.
4. Floor Man # 2

- a) Notify the Tool Pusher and Operator Representative of the H<sub>2</sub>S alarms.
- b) Check for open fires and, if safe to do so, extinguish them.
- c) Stop all welding operations.
- d) Turn-off all non-explosion proof lights and instruments.
- e) Report to Driller for further instructions.

5. Tool Pusher

- a) Report to the rig floor.
- b) Have a meeting with all crews.
- c) Compile and summarize all information.
- d) Calculate the proper kill weight.
- e) Ensure that proper well procedures are put into action.

6. Operator Representative

- a) Notify the Drilling Superintendent.
- b) Determine if an emergency exists and if so, activate the contingency plan.

B. Drill No. 2 – Tripping Pipe

1. Driller

- a) Sound the alarm immediately when mud volume increase has been detected.
- b) Position the upper tool joint just above the rotary table and set slips.
- c) Install a full opening valve or inside blowout preventor tool to close the drill pipe.
- d) Check flow.
- e) Record all data reported by the crew.

f) Determine the course of action.

2. Derrickman

- a) Come down out of derrick.
- b) Notify Tool Pusher and Operator Representative.
- c) Check for open fires and, if safe to do so, extinguish them.
- d) Stop all welding operations.
- e) Report to Driller for further instructions.

3. Floor Man # 1

- a) Pick up full opening valve or inside blowout preventor tool and stab into tool joint above rotary table (with Floor Man # 2).
- b) Tighten valve with back-up tongs.
- c) Close pipe rams after signal from Floor Man # 2.
- d) Read accumulator pressure and check for possible high pressure fluid leaks in valves or piping.
- e) Report to Driller for further instructions.

4. Floor Man # 2

- a) Pick-up full opening valve or inside blowout preventor tool and stab into tool joint above rotary table (with Floor Man # 1).
- b) Position back-up tongs on drill pipe.
- c) Open choke line valve at BOP.
- d) Signal Floor Man # 1 at accumulator that choke line is open.
- e) Close choke and upstream valve after pipe rams have been closed.
- f) Check for leaks on BOP stack and choke manifold.
- g) Read annular pressure.

h) Report readings to the Driller.

5. Tool Pusher

- a) Report to the rig floor.
- b) Have a meeting with all of the crews.
- c) Compile and summarize all information.
- d) See that proper well kill procedures are put into action.

6. Operator Representative

- a) Notify Drilling Superintendent
- b) Determine if an emergency exists, and if so, activate the contingency plan.

## IGNITION PROCEDURES

### **Responsibility:**

The decision to ignite the well is the responsibility of the DRILLING FOREMAN in concurrence with the STATE POLICE. In the event the Drilling Foreman is incapacitated, it becomes the responsibility of the RIG TOOL PUSHER. This decision should be made only as a last resort and in a situation where it is clear that:

1. Human life and property are endangered.
2. There is no hope of controlling the blowout under the prevailing conditions.

If time permits, notify the main office, but do not delay if human life is in danger. Initiate the first phase of the evacuation plan.

### **Instructions for Igniting the Well:**

1. Two people are required for the actual igniting operation. Both men must wear self-contained breathing apparatus and must use a full body harness and attach a retrievable safety line to the D-Ring in the back. One man must monitor the atmosphere for explosive gases with the LEL monitor, while the Drilling Foreman is responsible for igniting the well.
2. The primary method to ignite is a 25mm flare gun with a range of approximately 500 feet.
3. Ignite from upwind and do not approach any closer than is warranted.
4. Select the ignition site best suited for protection and which offers an easy escape route.
5. Before igniting, check for the presence of combustible gases.
6. After igniting, continue emergency actions and procedures as before.
7. All unassigned personnel will limit their actions to those directed by the Drilling Foreman.

NOTE: After the well is ignited, burning Hydrogen Sulfide will convert to Sulfur Dioxide, which is also highly toxic. Do not assume the area is safe after the well is ignited.

## TRAINING PROGRAM

When working in an area where Hydrogen Sulfide ( $H_2S$ ) might be encountered, definite training requirements must be carried out. The Company Supervisor will ensure that all personnel, at the well site, have had adequate training in the following:

1. Hazards and Characteristics of Hydrogen Sulfide.
2. Physicals effects of Hydrogen Sulfide on the human body.
3. Toxicity of Hydrogen Sulfide and Sulfur Dioxide.
4.  $H_2S$  detection, emergency alarm and sensor location.
5. Emergency rescue.
6. Resuscitators.
7. First aid and artificial resuscitation.
8. The effects of Hydrogen Sulfide on metals.
9. Location safety.

Service company personnel and visiting personnel must be notified if the zone contains  $H_2S$ , and each service company must provide adequate training and equipment for their employees before they arrive at the well site.

## **EMERGENCY EQUIPMENT REQUIREMENTS**

### **Lease Entrance Sign:**

Should be located at the lease entrance with the following information:

CAUTION-POTENTIAL POISON GAS  
HYDROGEN SULFIDE  
NO ADMITTANCE WITHOUT AUTHORIZATION

### **Respiratory Equipment:**

- Fresh air breathing equipment should be placed at the safe briefing areas and should include the following:
- Two SCBA's at each briefing area.
- Enough air line units to operate safely, anytime the H<sub>2</sub>S concentration reaches the IDLH level (100 PPM).
- Cascade system with enough breathing air hose and manifolds to reach the rig floor, the derrickman and the other operation areas.

### **Windsocks or Wind Streamers:**

- A minimum of two 10" windsocks located at strategic locations so that they may be seen from any point on location.
- Wind streamers (if preferred) should be placed at various locations on the well site to ensure wind consciousness at all times. (Corners of location).

### **Hydrogen Sulfide Detector and Alarms:**

- 1-Four channel H<sub>2</sub>S monitor with alarms.
- Four (4) sensors located as follows: # 1 – Rig Floor, # 2 – Bell Nipple, # 3 – Shale Shaker, # 4 – Mud Pits.
- Gastec or Draeger pump with tubes.
- Sensor test gas.

### **Well Condition Sign and Flags:**



The Well Condition Sign w/flags should be placed a minimum of 150' before you enter the location. It should have three (3) color coded flags (green, yellow and red) that will be used to denote the following location conditions:

GREEN – Normal Operating Conditions  
YELLOW – Potential Danger  
RED – Danger, H<sub>2</sub>S Gas Present

**Auxiliary Rescue Equipment:**

- Stretcher
- 2 – 100' Rescue lines
- First Aid Kit properly stocked.

**Mud Inspection Equipment:**

Garret Gas Train or Hach Tester for inspection of Hydrogen Sulfide in the drilling mud system.

**Fire Extinguishers:**

Adequate fire extinguishers shall be located at strategic locations.

**Blowout Preventor:**

- The well shall have hydraulic BOP equipment for the anticipated BHP.
- The BOP should be tested upon installation.
- BOP, Choke Line and Kill Line will be tested as specified by Operator.

**Confined Space Monitor:**

There should be a portable multi-gas monitor with at least 3 sensors (O<sub>2</sub>, LEL & H<sub>2</sub>S). This instrument should be used to test the atmosphere of any confined space before entering. It should also be used for atmospheric testing for LEL gas before beginning any type of Hot Work. Proper calibration documentation will need to be provided.

**Communication Equipment:**

- Proper communication equipment such as cell phones or 2 – way radios should be available at the rig.

- Radio communication shall be available for communication between the company man's trailer, rig floor and the tool pusher's trailer.
- Communication equipment shall be available on the vehicles.

**Special Control Equipment:**

- Hydraulic BOP equipment with remote control on the ground.
- Rotating head at the surface casing point.

**Evacuation Plan:**

- Evacuation routes should be established prior to spudding the well.
- Should be discussed with all rig personnel.

**Designated Areas:**

***Parking and Visitor area:***

- All vehicles are to be parked at a pre-determined safe distance from the wellhead.
- Designated smoking area.

***Safe Briefing Areas:***

- Two Safe Briefing Areas shall be designated on either side of the location at the maximum allowable distance from the well bore so they offset prevailing winds or they are at a 180 degree angle if wind directions tend to shift in the area.
- Personal protective equipment should be stored at both briefing areas or if a moveable cascade trailer is used, it should be kept upwind of existing winds. When wind is from the prevailing direction, both briefing areas should be accessible.

***NOTE:***

- Additional equipment will be available at the nearest Callaway Safety Office.
- Additional personal H<sub>2</sub>S monitors are available for all employees on location.

- Automatic Flare Igniters are recommended for installation on the rig.

## CHECK LISTS

### Status Check List

Note: Date each item as they are implemented.

1. Sign at location entrance. \_\_\_\_\_
2. Two (2) wind socks (in required locations). \_\_\_\_\_
3. Wind Streamers (if required). \_\_\_\_\_
4. SCBA's on location for all rig personnel and mud loggers. \_\_\_\_\_
5. Air packs, inspected and ready for use. \_\_\_\_\_
6. Spare bottles for each air pack (if required). \_\_\_\_\_
7. Cascade system for refilling air bottles. \_\_\_\_\_
8. Cascade system and hose line hook up. \_\_\_\_\_
9. Choke manifold hooked-up and tested.  
(Before drilling out surface casing.) \_\_\_\_\_
10. Remote Hydraulic BOP control (hooked-up and  
tested before drilling out surface casing). \_\_\_\_\_
11. BOP tested (before drilling out surface casing). \_\_\_\_\_
12. Mud engineer on location with equipment to test  
mud for H<sub>2</sub>S. \_\_\_\_\_
13. Safe Briefing Areas set-up. \_\_\_\_\_
14. Well Condition sign and flags on location and ready. \_\_\_\_\_
15. Hydrogen Sulfide detection system hooked-up & tested. \_\_\_\_\_
16. Hydrogen Sulfide alarm system hooked-up & tested. \_\_\_\_\_
17. Stretcher on location at Safe Briefing Area. \_\_\_\_\_
18. 2-100' Life Lines on location. \_\_\_\_\_

19. 1-20# Fire Extinguisher in safety trailer.
20. Confined Space Monitor on location and tested.
21. All rig crews and supervisor trained (as required).
22. Access restricted for unauthorized personnel.
23. Drills on H<sub>2</sub>S and well control procedures.
24. All outside service contractors advised of potential H<sub>2</sub>S on the well.
25. NO SMOKING sign posted.
26. H<sub>2</sub>S Detector Pump w/tubes on location.
27. 25mm Flare Gun on location w/flares.
28. Automatic Flare Ignitor installed on rig.

---

---

---

---

---

---

---

---

---

---

## Procedural Check List

Perform the following on each tour:

1. Check fire extinguishers to see that they have the proper charge.
2. Check Breathing equipment to insure that they have not been tampered with.
3. Check pressure on the supply air bottles to make sure they are capable of recharging.
4. Make sure all of the Hydrogen Sulfide detection systems are operative.

Perform the following each week:

1. Check each piece of breathing equipment to make sure that they are fully charged and operational. This requires that the air cylinder be opened and the mask assembly be put on and tested to make sure that the regulators and masks are properly working. Negative and Positive pressure should be conducted on all masks.
2. BOP skills.
3. Check supply pressure on BOP accumulator stand-by source.
4. Check all breathing air mask assemblies to see that straps are loosened and turned back, ready to use.
5. Check pressure on cascade air cylinders to make sure they are fully charged and ready to use for refill purposes if necessary.
6. Check all cascade system regulators to make sure they work properly.
7. Perform breathing drills with on-site personnel.
8. Check the following supplies for availability:
  - Stretcher
  - Safety Belts and ropes.
  - Spare air bottles.
  - Spare oxygen bottles (if resuscitator required).
  - Gas Detector Pump and tubes.
  - Emergency telephone lists.

9. Test the Confined Space Monitor to verify the batteries are good.

## BRIEFING PROCEDURES

The following scheduled briefings will be held to ensure the effective drilling and operation of this project:

### Pre-Spud Meeting

Date: Prior to spudding the well.

Attendance: Drilling Supervisor

Drilling Engineer

Drilling Foreman

Rig Tool Pushers

Rig Drillers

Mud Engineer

All Safety Personnel

Key Service Company Personnel

Purpose: Review and discuss the well program, step-by-step, to insure complete understanding of assignments and responsibilities.



## **EVACUATION PLAN**

### **General Plan**

The direct lines of action prepared by CALLAWAY SAFETY EQUIPMENT CO., INC., to protect the public from hazardous gas situations are as follows:

1. When the company approved supervisor (Drilling Foremen, Tool Pusher or Driller) determine that Hydrogen Sulfide gas cannot be limited to the well location, and the public will be involved, he will activate the evacuation plan. Escape routes are noted on the Area Map.
2. Company safety personnel or designee will notify the appropriate local government agency that a hazardous condition exists and evacuation need to be implemented.
3. Company approved safety personnel that have been trained in the use of the proper emergency equipment will be utilized.
4. Law enforcement personnel (State Police, Local Police Department, Fire Department, and the Sheriff's Department) will be called to aid in setting up and maintaining road blocks. Also, they will aid in evacuation of the public if necessary.

NOTE: Law enforcement personnel will not be asked to come into a contaminated area. Their assistance will be limited to uncontaminated areas. Constant radio contact will be maintained with them.

5. After the discharge of gas has been controlled, "Company" safety personnel will determine when the area is safe for re-entry.

**See Emergency Action Plan**

## Emergency Assistance Telephone List

### **PUBLIC SAFETY:**

**911 or**

Eddy County Sheriff's Department	(505) 558-3571
Fire Department	(505) 746-5050
Artesia General Hospital	(505) 748-3333
Life Flight:	
Arrow Care-Lubbock	(806) 744-5055
Southwest Air-Med E Vac.	(806) 242-6199

Surface	Lat. N. 32.9542891
Location	Long. W. 104.5351169

Bottom Hole	Lat. N. 32.9540552
Location	Long. W. 104.5480367

New Mexico D.O.T.	(505) 827-5100
New Mexico State Police	(505) 888-3137
Bureau of Land Management	(505) 393-3612
U.S. Dept. of Labor	(505) 248-5302
New Mexico OCD	(505) 393-6161
New Mexico OCD/After Hours	(505) 370-7106

### **EOG Resources, Inc.**

EOG / Midland	Office (432) 686-3600
---------------	-----------------------

Drilling Manager:	
Greg Young	Office (432) 686-3614
	Cell (432) 634-6675

Drilling Engineer:	
Jason Lagrega	Office (432) 686-3633
	Cell (432) 894-1217

### **McVay Drilling Rig #4**

McVay Drilling, NM	Office (505) 397-3311
--------------------	-----------------------

McVay Drilling Rig #4	Rig (505) 370-5598
-----------------------	--------------------

Tool Pusher:	
Terry Johson	Rig (505) 370-5598
	Cell (505) 370-5599
	Cell (505) 370-5620

### **Callaway Safety Equipment**

Odessa (432) 561-5049
Hobbs (505) 392-2973
Artesia (505) 746-2847

**MAPS AND PLATS**  
**(Maps & Plats Attached)**

District I  
1625 N. French Dr., Hobbs, NM 88240  
District II  
1301 W. Grand Avenue, Artesia, NM 88210  
District III  
1000 Rio Brazos Rd., Aztec, NM 87410  
District IV  
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico  
Energy, Minerals & Natural Resources Department  
OIL CONSERVATION DIVISION  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

Form C-102  
Revised October 12, 2005  
Submit to Appropriate District Office  
State Lease- 4 Copies  
Fee Lease- 3 Copies

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number	Pool Code	Pool Name
Property Code	Property Name <b>PO B 1 FEE</b>	Well Number <b>1H</b>
OGRI No.	Operator Name <b>EOG RESOURCES, INC.</b>	Elevation <b>3556'</b>

Surface Location


UL or lot no.	Section	Township	Range	Lot	Feet from the	North/South line	Feet from the	East/West line	County
16	1	16 SOUTH	24 EAST, N.M.P.M.		3400	SOUTH	660	EAST	EDDY

Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot	Feet from the	North/South line	Feet from the	East/West line	County
13	1	16 SOUTH	24 EAST, N.M.P.M.		3400	SOUTH	660	WEST	EDDY

Dedicated Acres	Joint or Infill	Consolidation Code	Order No.
-----------------	-----------------	--------------------	-----------

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

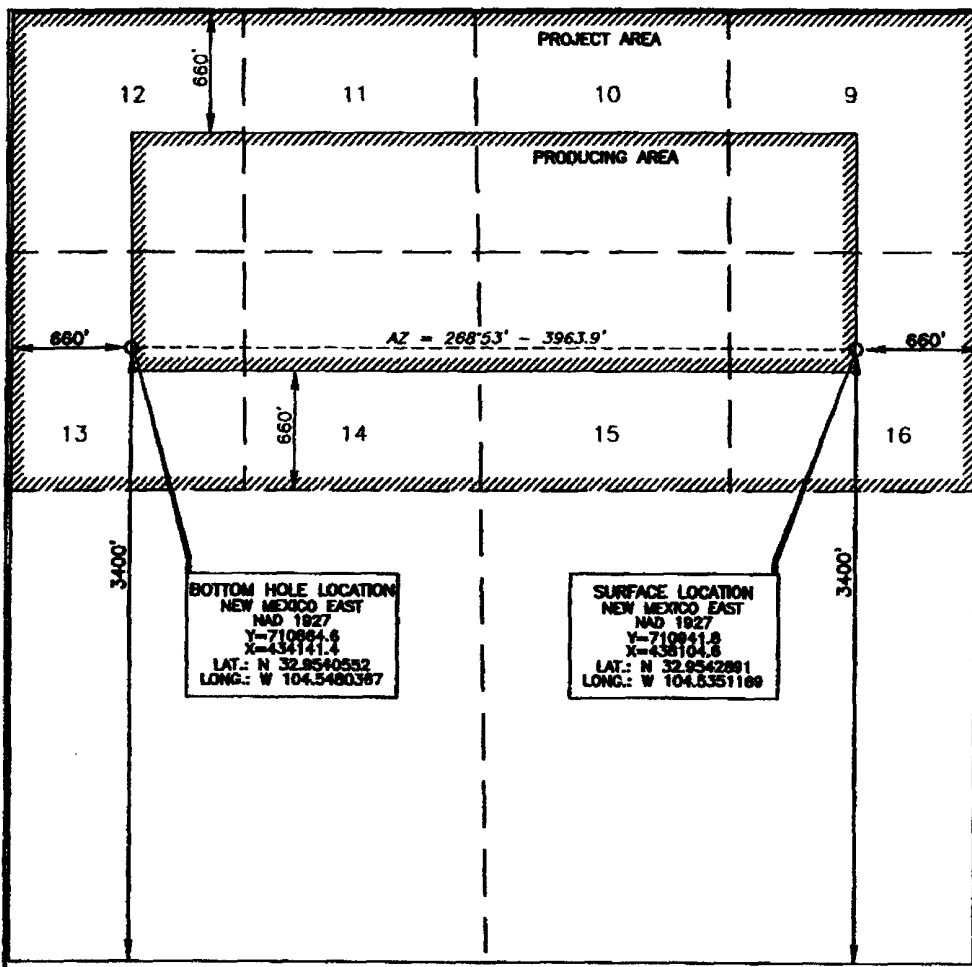

OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

Signature \_\_\_\_\_ Date \_\_\_\_\_

Printed Name \_\_\_\_\_

SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was located from field notes or actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

15079  
Date of Survey: MARCH 7, 2006  
Signature and Seal of Professional Surveyor: *Terry G. Auel*  
Certificate Number: 15079

WOF 080307ML-c (CDE)

### Affected Notification List

(within a 65 ' radius of exposure @100ppm)

The geologic zones that will be encountered during drilling are known to contain hazardous quantities of H<sub>2</sub>S. The accompanying map illustrates the affected areas of the community. The residents within this radius will be notified via a hand delivered written notice describing the activities, potential hazards, conditions of evacuation, evacuation drill siren alarms and other precautionary measures.

#### Evacuee Description:

Residents: **THERE ARE NO RESIDENTS WITHIN 3000' ROE.**

#### Notification Process:

A continuous siren audible to all residence will be activated, signaling evacuation of previously notified and informed residents.

#### Evacuation Plan:

All evacuees will migrate lateral to the wind direction.

The Oil Company will identify all home bound or highly susceptible individuals and make special evacuation preparations, interfacing with the local and emergency medical service as necessary.

**GENERAL INFORMATION**

District I  
1625 N. French Ave., Santa Fe, NM 87505  
District II  
1301 W. Grand Ave., Santa Fe, NM 87510  
District III  
1000 Rio Brazos Blvd., Santa Fe, NM 87510  
District IV  
1220 S. St. Francis Dr., Santa Fe, NM 87505

OIL CONSERVATION DIVISION  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

WELL API NO. 30-015-34751
5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name POB I FEE
8. Well Number 1H
9. OGRID Number 7377
10. Pool name or Wildcat Cottonwood Creek; WC West (Gas)

**SUNDY NOTICES AND REPORTS ON WELLS**  
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☐ Gas Well ☒ Other

2. Name of Operator  
EOG Resources, Inc.

3. Address of Operator  
P.O. Box 2267 Midland, Texas 79702

4. Well Location  
Unit Letter: 16: 3400 feet from the South line and 660 feet from the East line  
Section 1 Township 16S Range 24E NMPM County: Eddy

11. Elevation (Show whether DR, RKB, RT, GR, etc.)  
3556

Pit or Below-grade Tank Application ☐ or Closure ☐

Pit type \_\_\_\_\_ Depth to Groundwater \_\_\_\_\_ Distance from nearest fresh water well \_\_\_\_\_ Distance from nearest surface water \_\_\_\_\_

Pit Liner Thickness: \_\_\_\_\_ mil Below-Grade Tank: Volume \_\_\_\_\_ bbls; Construction Material \_\_\_\_\_

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

<p><b>NOTICE OF INTENTION TO:</b></p> <p>PERFORM REMEDIAL WORK <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/></p> <p>TEMPORARILY ABANDON <input type="checkbox"/> CHANGE PLANS <input checked="" type="checkbox"/></p> <p>PULL OR ALTER CASING <input checked="" type="checkbox"/> MULTIPLE COMPL <input type="checkbox"/></p> <p>OTHER: AMEND CASING PROGRAM &amp; CEMENT PROGRAM</p>	<p><b>SUBSEQUENT REPORT OF:</b></p> <p>REMEDIAL WORK <input type="checkbox"/> ALTERING CASING <input type="checkbox"/></p> <p>COMMENCE DRILLING OPNS. <input type="checkbox"/> P AND A <input type="checkbox"/></p> <p>CASING/CEMENT JOB <input type="checkbox"/></p> <p>OTHER: X EXTEND PERMIT EXPIRATION (1) YEAR</p>
--	---

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

AMEND CASING PROGRAM & CEMENT PROGRAM. See Exhibit "A" attached hereto.

EOG RESOURCES, Inc. respectfully requests extending the approved drilling permit for (1) additional year. Thence, extending the approved permit to 3-30-2008.

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☐, a general permit ☐ or an (attached) alternative OCD-approved plan ☐.

SIGNATURE Donny J. Glanton TITLE: Agent DATE 3/19/2007

Type or print name E-mail address: donny\_glanton@eogresources.com Telephone No. (432) 686-3642  
For State Use Only BRYAN G. ARRANT

APPROVED BY: DISTRICT II GEOLOGIST TITLE DATE MAR 21 2007  
Conditions of Approval (if any):

# EXHIBIT "A"

## Permit Information:

Well Name: Po B 1 Fee #1H

Revised 3/15/07

## Location:

SL 3400' FSL & 660' FEL, Section 1, T-16-S, R-24-E, Eddy Co., N.M.

BHL 3400' FSL & 660' FWL, Section 1, T-16-S, R-24-E, Eddy Co., N.M.

## Casing Program:

Casing	Setting Depth	Hole Size	Casing Size	Casing Weight	Casing Grade	Desired TOC
Surface	950'	12-1/4"	8-5/8"	32#	J-55	Surface
Production	8,383'	7-7/8"	5 1/2"	17#	N-80	Surface

## Cement Program:

Depth	No. Sacks	Slurries:
950'	200	Lead: Premium Plus + 2% CaCl <sub>2</sub> + 3% Econolite + 1/4 pps Flocele
	175	Tail: Premium Plus + 2% CaCl <sub>2</sub> + 1/4 pps Flocele
8,383'	400	Lead: Interfill C + 1/4 pps Flocele
	350	Tail: Premium Cement + 100% Acid Soluble Additive + 0.6% Halad@-344 + 0.8% Econolite + 0.2% HR-55

## Mud Program:

Depth	Type	Weight (ppg)	Viscosity	Water Loss
0 - 950'	Fresh - Gel	8.6-8.8	28-34	N/c
950' - 4,400'	Cut Brine	8.8-9.2	28-34	N/c
4,400' - 5,200'	Cut Brine	8.8-9.2	28-34	10-15
4,143' - 8,383'	Polymer (Lateral)	9.0-9.4	40-45	10-25



District II

1301 W. Grand Ave., Artesia, NM 88210  
 Phone:(505) 748-1283 Fax:(505) 748-9720

State of New Mexico  
 Energy, Minerals and Natural  
 Resources

Oil Conservation Division  
 1220 S. St Francis Dr.  
 Santa Fe, NM 87505

Form C-101  
 Permit 26208

**APPLICATION FOR PERMIT TO DRILL, RE-ENTER, DEEPEN, PLUGBACK, OR ADD A  
 ZONE**

1. Operator Name and Address EOG RESOURCES INC PO BOX 2267 MIDLAND , TX 79702		2. OGRID Number 7377
		3. API Number 30-015-34751
4. Property Code 35559	5. Property Name PO B 1 FEE	6. Well No. 001H

**7. Surface Location**

UL - Lot H	Section 1	Township 16S	Range 24E	Lot Idn 16	Feet From 3400	N/S Line S	Feet From 660	E/W Line E	County EDDY
------------------	--------------	-----------------	--------------	------------------	----------------------	------------------	---------------------	------------------	----------------

**8. Pool Information**

COTTONWOOD CREEK;WC, WEST (GAS)	75260
---------------------------------	-------

**Additional Well Information**

9. Work Type New Well	10. Well Type GAS	11. Cable/Rotary	12. Lease Type Private	13. Ground Level Elevation 3556
14. Multiple N	15. Proposed Depth 5200	16. Formation Wolfcamp	17. Contractor	18. Spud Date
Depth to Ground water 100		Distance from nearest fresh water well 500		Distance to nearest surface water > 1000
Pit: Liner: <input type="checkbox"/> 12 mils thick Clay <input type="checkbox"/> Pit Volume: 10300 bbls Drilling Method: Synthetic <input type="checkbox"/> Fresh Water <input type="checkbox"/> Brine <input type="checkbox"/> Diesel/Oil-based <input type="checkbox"/> Gas/Air <input type="checkbox"/> Closed Loop System <input type="checkbox"/>				

**19. Proposed Casing and Cement Program**

Type	Hole Size	Casing Type	Casing Weight/ft	Setting Depth	Sacks of Cement	Estimated TOC
Surf	11	7	23	950	450	0
Prod	6.125	4.5	11.6	8500	800	0

**Casing/Cement Program: Additional Comments**

--

**Proposed Blowout Prevention Program**

Type	Working Pressure	Test Pressure	Manufacturer
DoubleRam	3000	3000	

I hereby certify that the information given above is true and complete to the best of my knowledge and belief. I further certify that the drilling pit will be constructed according to NMOCD guidelines <input type="checkbox"/> , a general permit <input type="checkbox"/> , or an (attached) alternative OCD-approved plan <input type="checkbox"/> .		OIL CONSERVATION DIVISION	
		Approved By: Bryan Arrant	
Printed Name: Electronically filed by Mike Francis		Title: Geologist	
Title: ROW Agent		Approved Date: 3/30/2006	Expiration Date: 3/30/2007
Email Address: mike francis@eogresources.com			
Date: 3/29/2006	Phone: 4326863714	Conditions of Approval Attached	

District I

1625 N. French Dr., Hobbs, NM 88240

State of New Mexico

Energy, Minerals and Natural  
Resources

Form C-102

Permit 26208

District II

1301 W. Grand Ave., Artesia, NM 88210

Oil Conservation Division

District III

1000 Rio Brazos Rd., Aztec, NM 87410

1220 S. St Francis Dr.

Santa Fe, NM 87505

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505

**WELL LOCATION AND ACREAGE DEDICATION PLAT**

1. API Number 30-015-34751	2. Pool Code 75260	3. Pool Name COTTONWOOD CREEK;WC, WEST (GAS)
4. Property Code 35559	5. Property Name PO B 1 FEE	6. Well No. 001H
7. OGRID No. 7377	8. Operator Name EOG RESOURCES INC	9. Elevation 3556

**10. Surface Location**

UL - Lot 16	Section 1	Township 16S	Range 24E	Lot Idn 16	Feet From 3400	N/S Line S	Feet From 660	E/W Line E	County EDDY
-------------------	--------------	-----------------	--------------	------------------	----------------------	------------------	---------------------	------------------	----------------

**11. Bottom Hole Location If Different From Surface**

UL - Lot 13	Section 1	Township 16S	Range 24E	Lot Idn 13	Feet From 3400	N/S Line S	Feet From 660	E/W Line W	County EDDY
12. Dedicated Acres 320.00		13. Joint or Infill		14. Consolidation Code		15. Order No.			

**NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL  
INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN  
APPROVED BY THE DIVISION**

**OPERATOR CERTIFICATION**

*I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location(s) or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.*

E-Signed By: Mike Francis

Title: ROW Agent

Date: 3/29/2006

**SURVEYOR CERTIFICATION**

*I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.*

Surveyed By: Terry Asel

Date of Survey: 3/7/2006

Certificate Number: 15079

## Permit Conditions of Approval

Operator: EOG RESOURCES INC , 7377

Well: PO B 1 FEE #001H

API: 30-015-34751

OCD Reviewer	Condition
BArrant	Pit construction and closure must satisfy all requirements of your approved plan, O.C.D. Rule 19.15.2.50, and the Pit and Below-Grade Tank Guidelines
BArrant	Please notify OCD time of spud and time to witness the cementing to surface of all casing strings.
BArrant	Approval from Santa Fe is required providing another well in the same proation unit is drilled to produce from the same formation.

## Permit Comments

Operator: EOG RESOURCES INC , 7377

Well: PO B 1 FEE #001H

API:

Created By	Comment	Comment Date
dglanton	Plat, Detailed Casing, Mud, Cement, Drilling Plan and H2S letter will be forwarded via regular mail.	3/28/2006

# EOG RESOURCES INC.

## Planning Report

Database: EDM  
 Company: EOG - Midland (3)  
 Project: Thames  
 Site: Po B 1 Fee #1H  
 Well: Po B 1 Fee #1H  
 Wellbore: Po B 1 Fee #1H  
 Design: Original Plan

Local Co-ordinate Reference: Site Po B 1 Fee #1H  
 TVD Reference: WELL @ 3573.00ft (Original Well Elev)  
 MD Reference: WELL @ 3573.00ft (Original Well Elev)  
 North Reference: Grid  
 Survey Calculation Method: Minimum Curvature

Project:	Thames	System Datum:	Ground Level
Map System:	US State Plane 1927 (Exact solution)		
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	New Mexico East 3001		

Site:	Po B 1 Fee #1H				
Site Position:		Northing:	710,941.80ft	Latitude:	32° 57' 15.440 N
From:	Map	Easting:	438,104.60ft	Longitude:	104° 32' 6.421 W
Position Uncertainty:	0.00 ft	Slot Radius:	"	Grid Convergence:	-0.11°

Well:	Po B 1 Fee #1H					
Well Position	+N-S	0.00 ft	Northing:	710,941.80 ft	Latitude:	32° 57' 15.440 N
	+E-W	0.00 ft	Easting:	438,104.60 ft	Longitude:	104° 32' 6.421 W
Position Uncertainty	0.00 ft	Wellhead Elevation:	ft	Ground Level:	3,556.00ft	

Wellbore	Po B 1 Fee #1H					
Reference	IGRF2005	Sample Date	3/27/2006	8.68	60.80	49,453

Design:	Original Plan				
Audit Notes:					
Version:	Phase:	PROTOTYPE	Tie On Depth:	0.00	
Vertical Section:	Depth from TVD	+N-S	+E-W	Direction	
	0.00	0.00	0.00	268.88	

0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4,143.00	0.00	0.00	4,143.00	0.00	0.00	0.00	0.00	0.00	0.00
4,900.12	90.00	268.88	4,625.00	-9.42	-481.91	11.89	11.89	0.00	268.88
6,418.12	90.00	268.88	4,625.00	-39.09	-1,999.62	0.00	0.00	0.00	0.00
6,484.37	91.99	268.89	4,623.85	-40.38	-2,065.84	3.00	3.00	0.01	0.24
8,382.81	91.99	268.89	4,558.01	-77.19	-3,962.78	0.00	0.00	0.00	0.00
8,383.23	92.00	268.89	4,558.00	-77.20	-3,963.20	3.00	2.97	0.39	7.47 BHL (Po B #1H)

# EOG RESOURCES INC.

## Planning Report

Database: EDM  
Company: EOG - Midland (3)  
Project: Thames  
Site: Po B 1 Fee #1H  
Well: Po B 1 Fee #1H  
Wellbore: Po B 1 Fee #1H  
Design: Original Plan

Local Co-ordinate Reference:  
TVD Reference:  
MD Reference:  
North Reference:  
Survey Calculation Method:

Site Po B 1 Fee #1H  
WELL @ 3573.00ft (Original Well Elev)  
WELL @ 3573.00ft (Original Well Elev)  
Grid  
Minimum Curvature

### Planned Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	N-S (ft)	E-W (ft)	Vertical Section (ft)	Depth (ft)	Depth (ft)	Turn Rate (°/ft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00
600.00	0.00	0.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00
700.00	0.00	0.00	700.00	0.00	0.00	0.00	0.00	0.00	0.00
800.00	0.00	0.00	800.00	0.00	0.00	0.00	0.00	0.00	0.00
900.00	0.00	0.00	900.00	0.00	0.00	0.00	0.00	0.00	0.00
1,000.00	0.00	0.00	1,000.00	0.00	0.00	0.00	0.00	0.00	0.00
1,100.00	0.00	0.00	1,100.00	0.00	0.00	0.00	0.00	0.00	0.00
1,200.00	0.00	0.00	1,200.00	0.00	0.00	0.00	0.00	0.00	0.00
1,300.00	0.00	0.00	1,300.00	0.00	0.00	0.00	0.00	0.00	0.00
1,400.00	0.00	0.00	1,400.00	0.00	0.00	0.00	0.00	0.00	0.00
1,500.00	0.00	0.00	1,500.00	0.00	0.00	0.00	0.00	0.00	0.00
1,600.00	0.00	0.00	1,600.00	0.00	0.00	0.00	0.00	0.00	0.00
1,700.00	0.00	0.00	1,700.00	0.00	0.00	0.00	0.00	0.00	0.00
1,800.00	0.00	0.00	1,800.00	0.00	0.00	0.00	0.00	0.00	0.00
1,900.00	0.00	0.00	1,900.00	0.00	0.00	0.00	0.00	0.00	0.00
2,000.00	0.00	0.00	2,000.00	0.00	0.00	0.00	0.00	0.00	0.00
2,100.00	0.00	0.00	2,100.00	0.00	0.00	0.00	0.00	0.00	0.00
2,200.00	0.00	0.00	2,200.00	0.00	0.00	0.00	0.00	0.00	0.00
2,300.00	0.00	0.00	2,300.00	0.00	0.00	0.00	0.00	0.00	0.00
2,400.00	0.00	0.00	2,400.00	0.00	0.00	0.00	0.00	0.00	0.00
2,500.00	0.00	0.00	2,500.00	0.00	0.00	0.00	0.00	0.00	0.00
2,600.00	0.00	0.00	2,600.00	0.00	0.00	0.00	0.00	0.00	0.00
2,700.00	0.00	0.00	2,700.00	0.00	0.00	0.00	0.00	0.00	0.00
2,800.00	0.00	0.00	2,800.00	0.00	0.00	0.00	0.00	0.00	0.00
2,900.00	0.00	0.00	2,900.00	0.00	0.00	0.00	0.00	0.00	0.00
3,000.00	0.00	0.00	3,000.00	0.00	0.00	0.00	0.00	0.00	0.00
3,100.00	0.00	0.00	3,100.00	0.00	0.00	0.00	0.00	0.00	0.00
3,200.00	0.00	0.00	3,200.00	0.00	0.00	0.00	0.00	0.00	0.00
3,300.00	0.00	0.00	3,300.00	0.00	0.00	0.00	0.00	0.00	0.00
3,400.00	0.00	0.00	3,400.00	0.00	0.00	0.00	0.00	0.00	0.00
3,500.00	0.00	0.00	3,500.00	0.00	0.00	0.00	0.00	0.00	0.00
3,600.00	0.00	0.00	3,600.00	0.00	0.00	0.00	0.00	0.00	0.00
3,700.00	0.00	0.00	3,700.00	0.00	0.00	0.00	0.00	0.00	0.00
3,800.00	0.00	0.00	3,800.00	0.00	0.00	0.00	0.00	0.00	0.00
3,900.00	0.00	0.00	3,900.00	0.00	0.00	0.00	0.00	0.00	0.00
4,000.00	0.00	0.00	4,000.00	0.00	0.00	0.00	0.00	0.00	0.00
4,100.00	0.00	0.00	4,100.00	0.00	0.00	0.00	0.00	0.00	0.00
4,143.00	0.00	0.00	4,143.00	0.00	0.00	0.00	0.00	0.00	0.00
4,200.00	6.78	268.88	4,199.87	-0.07	-3.37	3.37	11.89	11.89	0.00
4,300.00	18.66	268.88	4,297.24	-0.50	-25.34	25.34	11.89	11.89	0.00
4,400.00	30.55	268.88	4,387.99	-1.31	-66.89	66.91	11.89	11.89	0.00
4,500.00	42.44	268.88	4,468.24	-2.47	-126.25	126.27	11.89	11.89	0.00
4,600.00	54.32	268.88	4,534.54	-3.93	-200.86	200.90	11.89	11.89	0.00
4,700.00	66.21	268.88	4,584.05	-5.62	-287.52	287.58	11.89	11.89	0.00
4,800.00	78.10	268.88	4,614.64	-7.48	-382.52	382.59	11.89	11.89	0.00
4,900.00	89.99	268.88	4,625.00	-9.42	-481.78	481.88	11.89	11.89	0.00
4,900.12	90.00	268.88	4,625.00	-9.42	-481.91	482.00	11.89	11.89	0.00
5,000.00	90.00	268.88	4,625.00	-11.37	-581.77	581.88	0.00	0.00	0.00
5,100.00	90.00	268.88	4,625.00	-13.33	-681.75	681.88	0.00	0.00	0.00



# EOG RESOURCES INC.

## Planning Report

Database: EDM  
Company: EOG - Midland (3)  
Project: Thames  
Site: Po B 1 Fee #1H  
Well: Po B 1 Fee #1H  
Wellbore: Po B 1 Fee #1H  
Design: Original Plan

Local Co-ordinate Reference:  
TVD Reference:  
MD Reference:  
North Reference:  
Survey Calculation Method:

Site Po B 1 Fee #1H  
WELL @ 3573.00ft (Original Well Elev)  
WELL @ 3573.00ft (Original Well Elev)  
Grid  
Minimum Curvature

### Planned Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	N/E	E/W	Vertical Section	Diplog	Bore	Turn
5,200.00	90.00	268.88	4,625.00	-15.28	-781.73	781.88	0.00	0.00	0.00
5,300.00	90.00	268.88	4,625.00	-17.24	-881.71	881.88	0.00	0.00	0.00
5,400.00	90.00	268.88	4,625.00	-19.19	-981.69	981.88	0.00	0.00	0.00
5,500.00	90.00	268.88	4,625.00	-21.15	-1,081.67	1,081.88	0.00	0.00	0.00
5,600.00	90.00	268.88	4,625.00	-23.10	-1,181.65	1,181.88	0.00	0.00	0.00
5,700.00	90.00	268.88	4,625.00	-25.06	-1,281.63	1,281.88	0.00	0.00	0.00
5,800.00	90.00	268.88	4,625.00	-27.01	-1,381.61	1,381.88	0.00	0.00	0.00
5,900.00	90.00	268.88	4,625.00	-28.97	-1,481.59	1,481.88	0.00	0.00	0.00
6,000.00	90.00	268.88	4,625.00	-30.92	-1,581.57	1,581.88	0.00	0.00	0.00
6,100.00	90.00	268.88	4,625.00	-32.87	-1,681.55	1,681.88	0.00	0.00	0.00
6,200.00	90.00	268.88	4,625.00	-34.83	-1,781.54	1,781.88	0.00	0.00	0.00
6,300.00	90.00	268.88	4,625.00	-36.78	-1,881.52	1,881.88	0.00	0.00	0.00
6,400.00	90.00	268.88	4,625.00	-38.74	-1,981.50	1,981.88	0.00	0.00	0.00
6,418.12	90.00	268.88	4,625.00	-39.09	-1,999.62	2,000.00	0.00	0.00	0.00
6,484.37	91.99	268.89	4,623.85	-40.38	-2,065.84	2,066.23	3.00	3.00	0.01
6,500.00	91.99	268.89	4,623.31	-40.69	-2,081.46	2,081.85	0.00	0.00	0.00
6,600.00	91.99	268.89	4,619.84	-42.62	-2,181.38	2,181.79	0.00	0.00	0.00
6,700.00	91.99	268.89	4,616.37	-44.56	-2,281.30	2,281.73	0.00	0.00	0.00
6,800.00	91.99	268.89	4,612.91	-46.50	-2,381.22	2,381.67	0.00	0.00	0.00
6,900.00	91.99	268.89	4,609.44	-48.44	-2,481.14	2,481.61	0.00	0.00	0.00
7,000.00	91.99	268.89	4,605.97	-50.38	-2,581.06	2,581.55	0.00	0.00	0.00
7,100.00	91.99	268.89	4,602.50	-52.32	-2,680.98	2,681.49	0.00	0.00	0.00
7,200.00	91.99	268.89	4,599.03	-54.26	-2,780.90	2,781.43	0.00	0.00	0.00
7,300.00	91.99	268.89	4,595.57	-56.20	-2,880.82	2,881.37	0.00	0.00	0.00
7,400.00	91.99	268.89	4,592.10	-58.14	-2,980.75	2,981.31	0.00	0.00	0.00
7,500.00	91.99	268.89	4,588.63	-60.07	-3,080.67	3,081.25	0.00	0.00	0.00
7,600.00	91.99	268.89	4,585.16	-62.01	-3,180.59	3,181.19	0.00	0.00	0.00
7,700.00	91.99	268.89	4,581.69	-63.95	-3,280.51	3,281.13	0.00	0.00	0.00
7,800.00	91.99	268.89	4,578.23	-65.89	-3,380.43	3,381.07	0.00	0.00	0.00
7,900.00	91.99	268.89	4,574.76	-67.83	-3,480.35	3,481.01	0.00	0.00	0.00
8,000.00	91.99	268.89	4,571.29	-69.77	-3,580.27	3,580.95	0.00	0.00	0.00
8,100.00	91.99	268.89	4,567.82	-71.71	-3,680.19	3,680.89	0.00	0.00	0.00
8,200.00	91.99	268.89	4,564.35	-73.65	-3,780.11	3,780.83	0.00	0.00	0.00
8,300.00	91.99	268.89	4,560.89	-75.59	-3,880.03	3,880.77	0.00	0.00	0.00
8,382.81	91.99	268.89	4,558.01	-77.19	-3,962.78	3,963.53	0.00	0.00	0.00
8,383.23	92.00	268.89	4,558.00	-77.20	-3,963.20	3,963.95	3.00	2.97	0.39

BHL (Po B #1H)

### Targets



Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (ft)	N/E	E/W	Northing (ft)	Eastng (ft)	Latitude	Longitude
BHL (Po B #1H)	0.00	0.00	4,558.00	-77.20	-3,963.20	710,864.60	434,141.40	32° 57' 14.599 N	104° 32' 52.932 W
- plan hits target									
- Point									

# WELL DETAILS: Po B 1 Fee #1H

+N/-S	+E/-W	Northing	Ground Level:	3556.00				
0.00	0.00	710941.80	Easting	438104.60	Latitude	32° 57' 15.440 N	Longitude	104° 32' 6.421 W
								Slot

## SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFact	Target	Sec
1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
2	4143.00	0.00	0.00	4143.00	0.00	0.00	0.00	0.00	0.00	
3	4900.12	90.00	268.88	4625.00	-9.42	-481.91	11.89	268.88	482.00	
4	6418.12	90.00	268.88	4625.00	-39.09	-1999.62	0.00	0.00	2000.00	
5	6484.37	91.99	268.89	4623.85	-40.38	-2065.84	3.00	0.24	2066.23	
6	8382.81	91.99	268.89	4558.01	-77.19	-3962.78	0.00	0.00	3963.53	
7	8383.23	92.00	268.89	4558.00	-77.20	-3963.20	3.08	HL (P)	47 #18963.95	

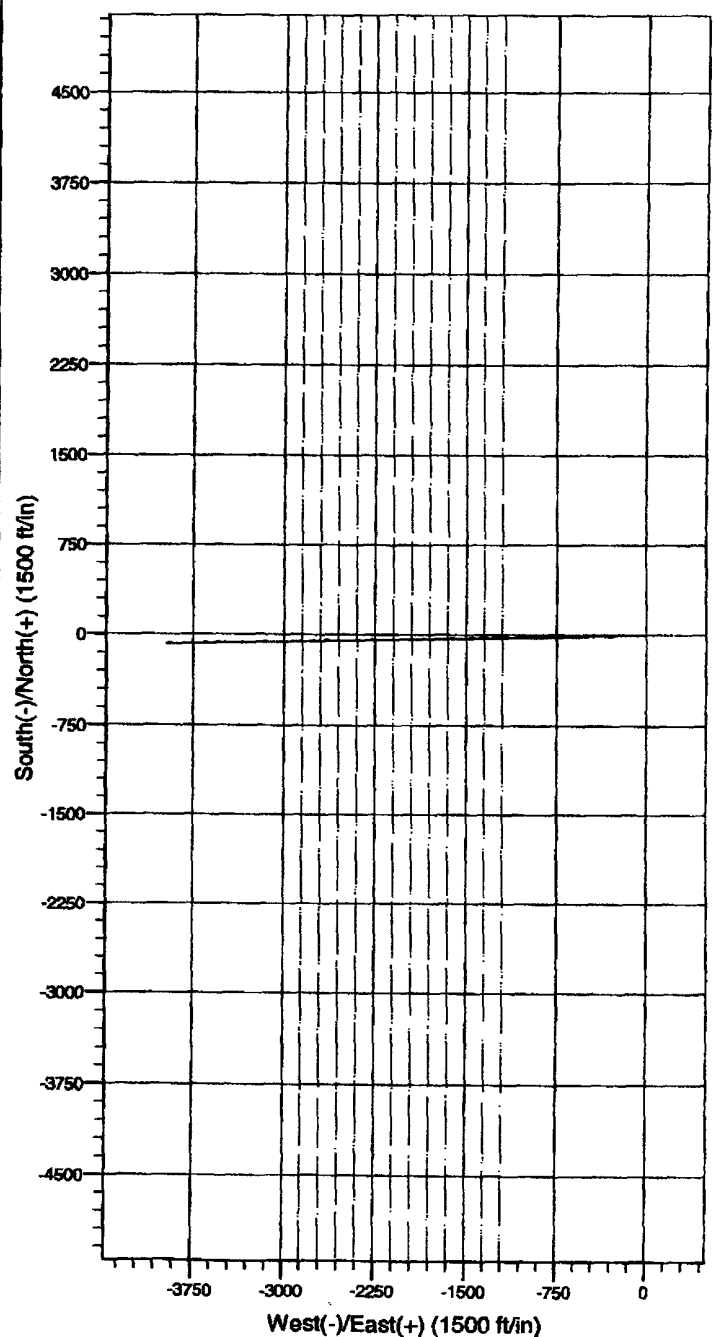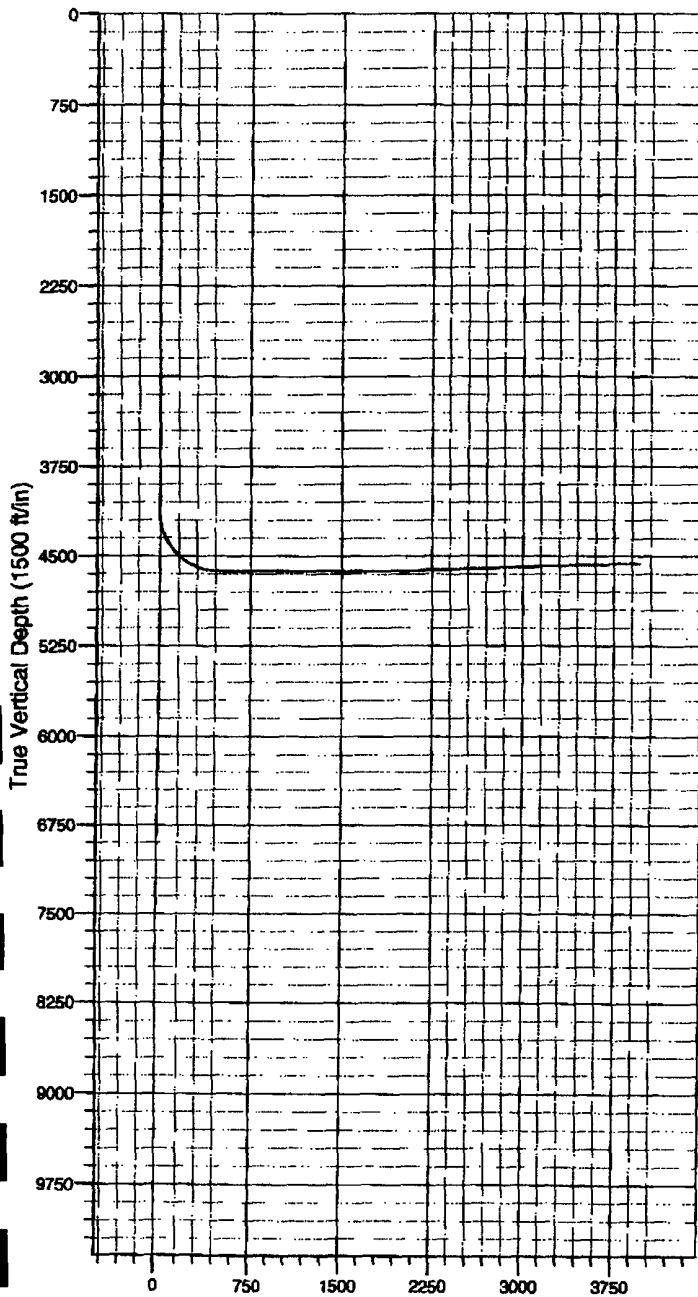

## Toxic Effects of H<sub>2</sub>S Poisoning

Hydrogen Sulfide is extremely toxic. The acceptable ceiling concentration for eight-hour exposure is 10 PPM, which is .001% by volume. Hydrogen Sulfide is heavier than air (specific gravity-1.192) and is colorless and transparent. Hydrogen Sulfide is almost as toxic as Hydrogen Cyanide and is 5-6 times more toxic than Carbon Monoxide. Occupational exposure limits for Hydrogen sulfide and other gasses are compared below in Table I. Toxicity table for H<sub>2</sub>S and physical effects are shown in Table II.

**Table 1**  
Permissible Exposure Limits of Various Gasses

Common Name	Symbol	Sp. Gravity	TLV	STEL	IDLH
Hydrogen Cyanide	HCN	.94	4.7 ppm	C	
Hydrogen Sulfide	H <sub>2</sub> S	1.192	10 ppm	15 ppm	100 ppm
Sulfide Dioxide	SO <sub>2</sub>	2.21	2 ppm	5 ppm	
Chlorine	CL	2.45	.5 ppm	1 ppm	
Carbon Monoxide	CO	0.97	25 ppm	200 ppm	
Carbon Dioxide	CO <sub>2</sub>	1.52	5000 ppm	30,000 ppm	
Methane	CH <sub>4</sub>	0.55	4.7% LEL	14% UEL	

### Definitions

- A. TLV – Threshold Limit Value is the concentration employees may be exposed to based on a TWA (time weighted average) for eight (8) hours in one day for 40 hours in one (1) week. This is set by ACGIH (American Conference of Governmental Hygienists and regulated by OSHA.
- B. STEL – Short Term Exposure Limit is the 15 minute average concentration an employee may be exposed to providing that the highest exposure never exceeds the OEL (Occupational Exposure Limit). The OEL for H<sub>2</sub>S is 19 PPM.
- C. IDLH – Immediately Dangerous to Life and Health is the concentration that has been determined by the ACGIH to cause serious health problems or death if exposed to this level. The IDLH for H<sub>2</sub>S is 100 PPM.

- D. TWA – Time Weighted Average is the average concentration of any chemical or gas for an eight (8) hour period. This is the concentration that any employee may be exposed to based on an TWA.

**TABLE II**  
Toxicity Table of H<sub>2</sub>S

Percent %	PPM	Physical Effects
.0001	1	Can smell less than 1 ppm.
.001	10	TLV for 8 hours of exposure
.0015	15	STEL for 15 minutes of exposure
.01	100	Immediately Dangerous to Life & Health. Kills sense of smell in 3 to 5 minutes.
.02	200	Kills sense of smell quickly, may burn eyes and throat.
.05	500	Dizziness, cessation of breathing begins <b>in a few minutes.</b>
.07	700	Unconscious quickly, death will result if not rescued promptly.
.10	1000	Death will result unless rescued promptly. Artificial resuscitation may be necessary.

## PHYSICAL PROPERTIES OF H<sub>2</sub>S

The properties of all gasses are usually described in the context of seven major categories:

COLOR  
ODOR  
VAPOR DENSITY  
EXPLOSIVE LIMITS  
FLAMMABILITY  
SOLUBILITY (IN WATER)  
BOILING POINT

Hydrogen Sulfide is no exception. Information from these categories should be considered in order to provide a fairly complete picture of the properties of the gas.

### ***COLOR – TRANSPARENT***

Hydrogen Sulfide is colorless so it is invisible. This fact simply means that you can't rely on your eyes to detect its presence. a fact that makes the gas extremely dangerous to be around.

### ***ODOR – ROTTEN EGGS***

Hydrogen Sulfide has a distinctive offensive smell, similar to "rotten eggs". For this reason it earned its common name "sour gas". However, H<sub>2</sub>S, even in low concentrations, is so toxic that it attacks and quickly impairs a victim's sense of smell, so it could be fatal to rely on your nose as a detection device.

### ***VAPOR DENSITY – SPECIFIC GRAVITY OF 1.192***

Hydrogen Sulfide is heavier than air so it tends to settle in low-lying areas like pits, cellars or tanks. If you find yourself in a location where H<sub>2</sub>S is known to exist, protect yourself. Whenever possible, work in an area upwind and keep to higher ground.

### ***EXPLOSIVE LIMITS – 4.3% TO 46%***

Mixed with the right proportion of air or oxygen, H<sub>2</sub>S will ignite and burn or explode, producing another alarming element of danger besides poisoning.

### ***FLAMMABILITY***

Hydrogen Sulfide will burn readily with a distinctive clear blue flame, producing Sulfur Dioxide ( $\text{SO}_2$ ), another hazardous gas that irritates the eyes and lungs.

### ***SOLUBILITY – 4 TO 1 RATIO WITH WATER***

Hydrogen Sulfide can be dissolved in liquids, which means that it can be present in any container or vessel used to carry or hold well fluids including oil, water, emulsion and sludge. The solubility of  $\text{H}_2\text{S}$  is dependent on temperature and pressure, but if conditions are right, simply agitating a fluid containing  $\text{H}_2\text{S}$  may release the gas into the air.

### ***BOILING POINT – (-76 degrees Fahrenheit)***

Liquefied Hydrogen Sulfide boils at a very low temperature, so it is usually found as a gas.

## RESPIRATOR USE

The Occupational Safety and Health Administration (OSHA) regulates the use of respiratory protection to protect the health of employees. OSHA's requirements are written in the Code of Federal Regulations, Title 29, Part 1910, Section 134, Respiratory Protection. This regulation requires that all employees who might be required to wear respirators, shall complete a OSHA mandated medical evaluation questionnaire . The employee then should be fit tested prior to wearing any respirator while being exposed to hazardous gasses.

Written procedures shall be prepared covering safe use of respirators in dangerous atmospheric situations, which might be encountered in normal operations or in emergencies. Personnel shall be familiar with these procedures and the available respirators.

Respirators shall be inspected prior to and after each use to make sure that the respirator has been properly cleaned, disinfected and that the respirator works properly. The unit should be fully charged prior to being used.

Anyone who may use respirators shall be properly trained in how to properly seal the face piece. They shall wear respirators in normal air and then in a test atmosphere. (Note: Such items as facial hair (beard or sideburns) and eyeglass temple pieces will not allow a proper seal.) Anyone that may be expected to wear respirators should have these items removed before entering a toxic atmosphere. A special mask must be obtained for anyone who must wear eyeglasses. Contact lenses should not be allowed.

Respirators shall be worn during the following conditions:

- A. Any employee who works near the top or on the top of any tank unless tests reveal less than 20 ppm of H<sub>2</sub>S.
- B. When breaking out any line where H<sub>2</sub>S can reasonably be expected.
- C. When sampling air in areas where H<sub>2</sub>S may be present.
- D. When working in areas where the concentration of H<sub>2</sub>S exceeds the Threshold Limit Value for H<sub>2</sub>S (10 ppm).
- E. At any time where there is a doubt as to the H<sub>2</sub>S level in the area to be entered.



## EMERGENCY RESCUE PROCEDURES

***DO NOT PANIC!!!***

**Remain Calm - THINK**

1. Before attempting any rescue you must first get out of the hazardous area yourself. Go to a safe briefing area.
2. Sound an alarm and activate the 911 system.
3. Put on breathing apparatus. At least two persons should do this, when available use the buddy system.
4. Rescue the victim and return them to a safe briefing area.
5. Perform an initial assessment and begin proper First Aid/CPR procedures.
6. Keep the victim lying down with a blanket or coat, etc..., under the shoulders to keep airway open. Conserve body heat and do not leave unattended.
7. If the eyes are affected by H<sub>2</sub>S, wash them thoroughly with potable water. For slight irritation, cold compresses are helpful.
8. In case a person has only minor exposure and does not lose consciousness totally, it's best if he doesn't return to work until the following day.
9. Any personnel overcome by H<sub>2</sub>S should always be examined by medical personnel. They should always be transported to a hospital or doctor.