

Submit To Appropriate District Office
State Lease - 6 copies
Fee Lease - 5 copies
District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87500

State of New Mexico
Energy, Minerals and Natural Resources

Form C-105
Revised June 10, 2003

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO.

30-015-35121

5. Indicate Type of Lease

STATE ☒ FEE ☐

State Oil & Gas Lease No.

WELL COMPLETION & COMPLETION REPORT AND LOG

1a. Type of Well:

OIL WELL ☐ GAS WELL ☒ DRY ☐ OTHER ☐

b. Type of Completion:

NEW ☒ WORK ☐ DEEPEN ☐ PLUG ☐ DIFF.
WELL OVER BACK RESVR. ☐ OTHER

2. Name of Operator

BEPCO, L.P.

3. Address of Operator

P.O. BOX 2760 MIDLAND, TX 79702-2760

7. Lease Name or Unit Agreement Name

Remuda Basin 25 State

8. Well No.

#1

9. Pool name or Wildcat

Undesignated Nash Draw (Morrow)

4. Well Location

Unit Letter I 1980 Feet From The South Line and 660 Feet From The East Line

Section 25 Township 23S Range 29E NMPM Eddy County

10. Date Spudded

10/02/2006

11. Date T.D. Reached

01/25/2007

12. Date Compl. (Ready to Prod.)

04/11/2007

13. Elevations (DF& RKB, RT, GR, etc.)

3060' GL

14. Elev. Casinghead

15. Total Depth

14,128

16. Plug Back T.D.

14,024'

17. If Multiple Compl. How Many

Zones?
No

18. Intervals

Drilled By

Rotary Tools

XX

Cable Tools

19. Producing Interval(s), of this completion - Top, Bottom, Name

Morrow @13676'-13806'; SI waiting plug back to Atoka/possible commingle

20. Was Directional Survey Made

Yes

21. Type Electric and Other Logs Run

GR-CLN; GR-AIT

22. Was Well Cored

No

23. CASING RECORD (Report all strings set in well)

CASING SIZE	WEIGHT LB./FT.	DEPTH SET	HOLE SIZE	CEMENTING RECORD	AMOUNT PULLED
13-3/8"	54.5	359'	17-1/2"	604 sxs Circ to Surf	0
9-5/8"	40	3321'	12-1/4"	1060 sx Circ to Surf	0
7"	26	11,012	8-3/4"	1835 TOC 3300' TS	0

24.

LINER RECORD

SIZE	TOP	BOTTOM	SACKS CEMENT	SCREEN
4-1/2"	10,646'	14,123'	375	

25. TUBING RECORD

SIZE	DEPTH SET	PACKER SET
NA		
4.5"	10646'	10646'

26. Perforation record (interval, size, and number)

13530-13590' 82 Holes

13676-13806' 52 Holes

27. ACID, SHOT, FRACTURE, CEMENT, SQUEEZE, ETC.

DEPTH INTERVAL	AMOUNT AND KIND MATERIAL USED
13530-13806'	86226 gals 40# 70Q binary foam & 67567 lbs of 20/40 Bauxite

28

PRODUCTION

Date First Production 04/11/2007		Production Method (Flowing, gas lift, pumping - Size and type pump) flowing			Well Status (Prod. or Shut-in) SI Waiting on pb		
Date of Test 04/20/2007	Hours Tested 24	Choke Size 24/64"	Prod'n For Test Period	Oil - Bbl 0	Gas - MCF 255	Water - Bbl. 0	Gas - Oil Ratio
Flow Tubing Press. 75	Casing Pressure 0	Calculated 24-Hour Rate	Oil - Bbl. 0	Gas - MCF 255	Water - Bbl. 0	Oil Gravity - API - (Corr.)	

29. Disposition of Gas (Sold, used for fuel, vented, etc.)

Vented

Test Witnessed By

30. List Attachments

Logs, C-104, Directional Survey

31. I hereby certify that the information shown on both sides of this form as true and complete to the best of my knowledge and belief

Signature



Printed

Name ANN MOORE

Title PRODUCTION CLERK

Date 05/16/2007

E-mail Address

camoorebasspet.com

INSTRUCTIONS

This form is to be filed with the appropriate District Office of the Division not later than 20 days after the completion of any newly-drilled or deepened well. It shall be accompanied by one copy of all electrical and radio-activity logs run on the well and a summary of all special tests conducted, including drill stem tests. All depths reported shall be measured depths. In the case of directionally drilled wells, true vertical depths shall also be reported. For multiple completions, items 25 through 29 shall be reported for each zone. The form is to be filed in quintuplicate except on state land, where six copies are required. See Rule 1105.

INDICATE FORMATION TOPS IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE

Southeastern New Mexico		Northwestern New Mexico	
T. Anhy	T. Canyon	T. Ojo Alamo	T. Penn "B"
T. Salt 395'	T. Strawn	T. Kirtland-Fruitland	T. Penn. "C"
B. Salt 3090'	T. Atoka 12,326'	T. Pictured Cliffs	T. Penn. "D"
T. Yates	T. Miss 14,065'	T. Cliff House	T. Leadville
T. 7 Rivers	T. Devonian	T. Menefee	T. Madison
T. Queen	T. Silurian	T. Point Lookout	T. Elbert
T. Grayburg	T. Montoya	T. Mancos	T. McCracken
T. San Andres	T. Simpson	T. Gallup	T. Ignacio Otzte
T. Glorieta	T. McKee	Base Greenhorn	T. Granite
T. Paddock	T. Ellenburger	T. Dakota	T.
T. Blinebry	T. Gr. Wash	T. Morrison	T.
T. Tubb	T. Delaware Sand	T. Todilto	T.
T. Drinkard	T. Bone Springs 6997' Lime	T. Entrada	T.
T. Abo	T.	T. Wingate	T.
T. Wolfcamp 10,340'	T.	T. Chinle	T.
T. Penn	T.	T. Permian	T.
T. Cisco (Bough C)	T.	T. Penn "A"	T.

OIL OR GAS SANDS OR ZONES

No. 1, from.....to.....

No. 2, from.....to.....

No. 3, from.....to.....

No. 4, from.....to.....

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from.....to.....feet.....
 No. 2, from.....to.....feet.....
 No. 3, from.....to.....feet.....

LITHOLOGY RECORD (Attach additional sheet if necessary)

From	To	Thickness In Feet	Lithology

From	To	Thickness In Feet	Lithology

DISTRICT I
1875 N. French Dr., Hobbs, NM 88240

DISTRICT II
811 South First, Artesia, NM 88210

DISTRICT III
1000 Rio Brazos Rd., Aztec, NM 87410

DISTRICT IV
2040 South Fachebo, Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources Department

Form C-102
Revised March 17, 1959

Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies

OIL CONSERVATION DIVISION

2040 South Pacheco
Santa Fe, New Mexico 87504-2088

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number 30-015-3	Pool Code 81600	Pool Name Undes. Nash Draw (Morrow) Gas
Property Code 17275	Property Name REMUDA BASIN "25" STATE	Well Number 1
OGED No. DD18D1	Operator Name BEPCO, L.P.	Elevation 3060'

Surface Location

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
1	25	23 S	29 E		1980	SOUTH	660	EAST	EDDY

Bottom Hole Location If Different From Surface

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
Dedicated Acres 320	Joint or Infill N	Consolidation Code		Order No.					

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

164.58 ACRES	165.37 ACRES	
163.89 ACRES	162.11 ACRES	

OPERATOR CERTIFICATION

I hereby certify the the information contained herein is true and complete to the best of my knowledge and belief.

Signature
W.R. Dannels

Printed Name
Division Drilling Supt.

Title
6/29/06

Date

SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision and that the same is true and correct to the best of my belief.

Date Surveyed
Signature of

Professional Surveyor
7977

No. 6409
Commission Expires

Certificate No. Gary L. Jones
7977

BASIN SURVEYS

SECTION 25, TOWNSHIP 23 SOUTH, RANGE 29 EAST, N.M.P.M.,
EDDY COUNTY, NEW MEXICO.



150' NORTH
□ OFF SET
3063.0'

BEPCO, L.P.
REMUDA BASIN "25" STATE #1
ELEV. - 3060'

□
150' WEST
OFF SET
3056.7'

○
Lat.-N 32°16'26.4"
Long-W 103°55'54.2"
(NAD-83)


150' EAST
□ OFF SET
3063.7'

150' SOUTH
OFF SET
□ 3054.7'

Proposed Lease Rd. 1777.8'

DIRECTIONS TO LOCATION:

FROM THE JUNCTION OF CO. RD. 793 (RAWHIDE) AND
STATE HWY 128, GO SOUTH ON CO. RD. 793 FOR
APPROX. 3.7 MILES TO LEASE ROAD; THENCE EAST
ON LEASE ROAD FOR 0.3 MILE; THENCE SOUTH 0.6
MILE; TO THE PROPOSED LEASE ROAD.



BEPCO, L.P.

REF: REMUDA BASIN "25" STATE #1 / WELL PAD AND TOPO
THE REMUDA BASIN "25" STATE #1 LOCATED 1980' FROM
THE SOUTH LINE AND 660' FROM THE EAST LINE OF
SECTION 25, TOWNSHIP 23 SOUTH, RANGE 29 EAST,
N.M.P.M., EDDY COUNTY, NEW MEXICO.

BASIN SURVEYS P.O. BOX 1786-HOBBS, NEW MEXICO

W.O. Number: 6485


Drawn By: J. SMALL

Date: 04-20-2006


Disk: JMS 6485A

Survey Date: 04-18-2006

Sheet 1 of 1 Sheets

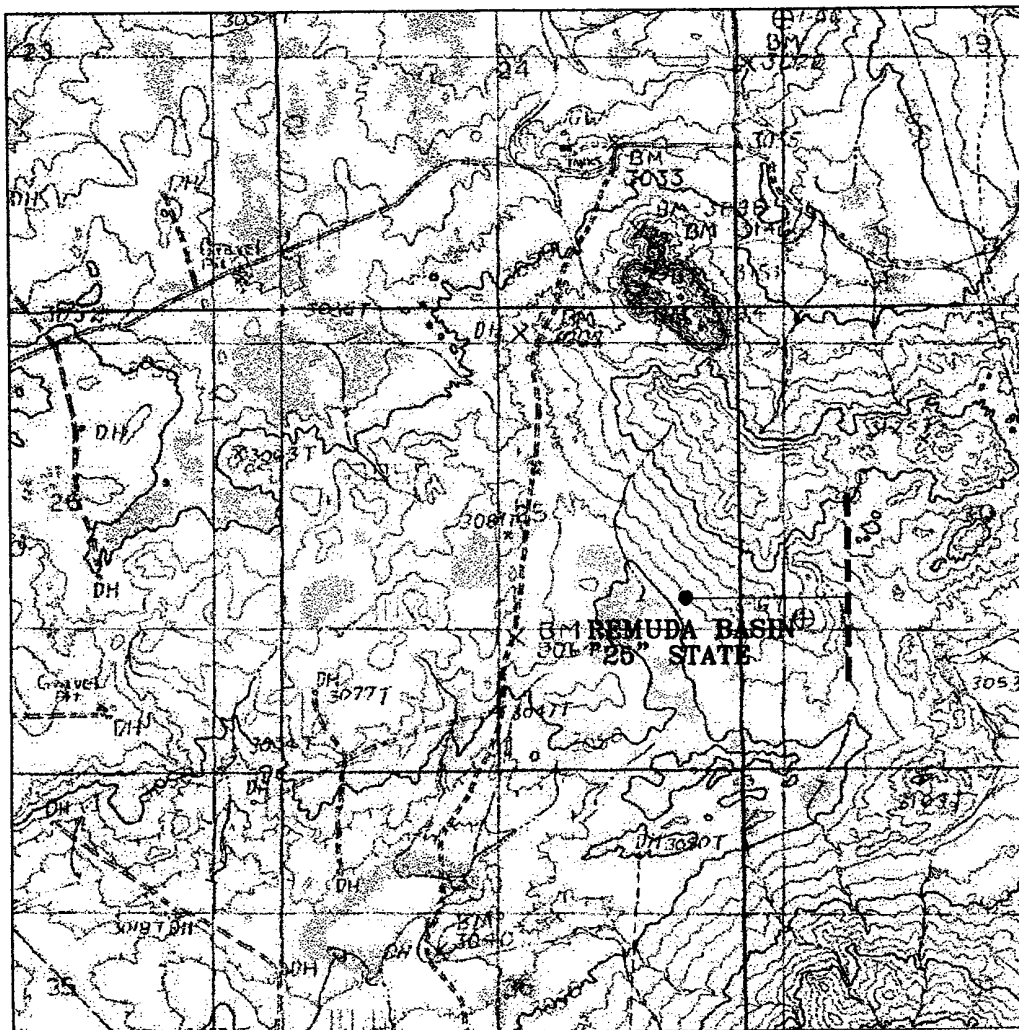

REMUDA BASIN "25" STATE #1
 Located at 1980' FSL and 660' FEL
 Section 25, Township 23 South, Range 29 East,
 N.M.P.M., Eddy County, New Mexico.



P.O. Box 1786
 1120 N. West County Rd.
 Hobbs, New Mexico 88241
 (505) 393-7316 - Office
 (505) 392-3074 - Fax
 basinsurveys.com


W.O. Number: JMS 6485T

Survey Date: 04-18-2006

Scale: 1" = 2000'

Date: 04-20-2006

BEPCO., L.P.

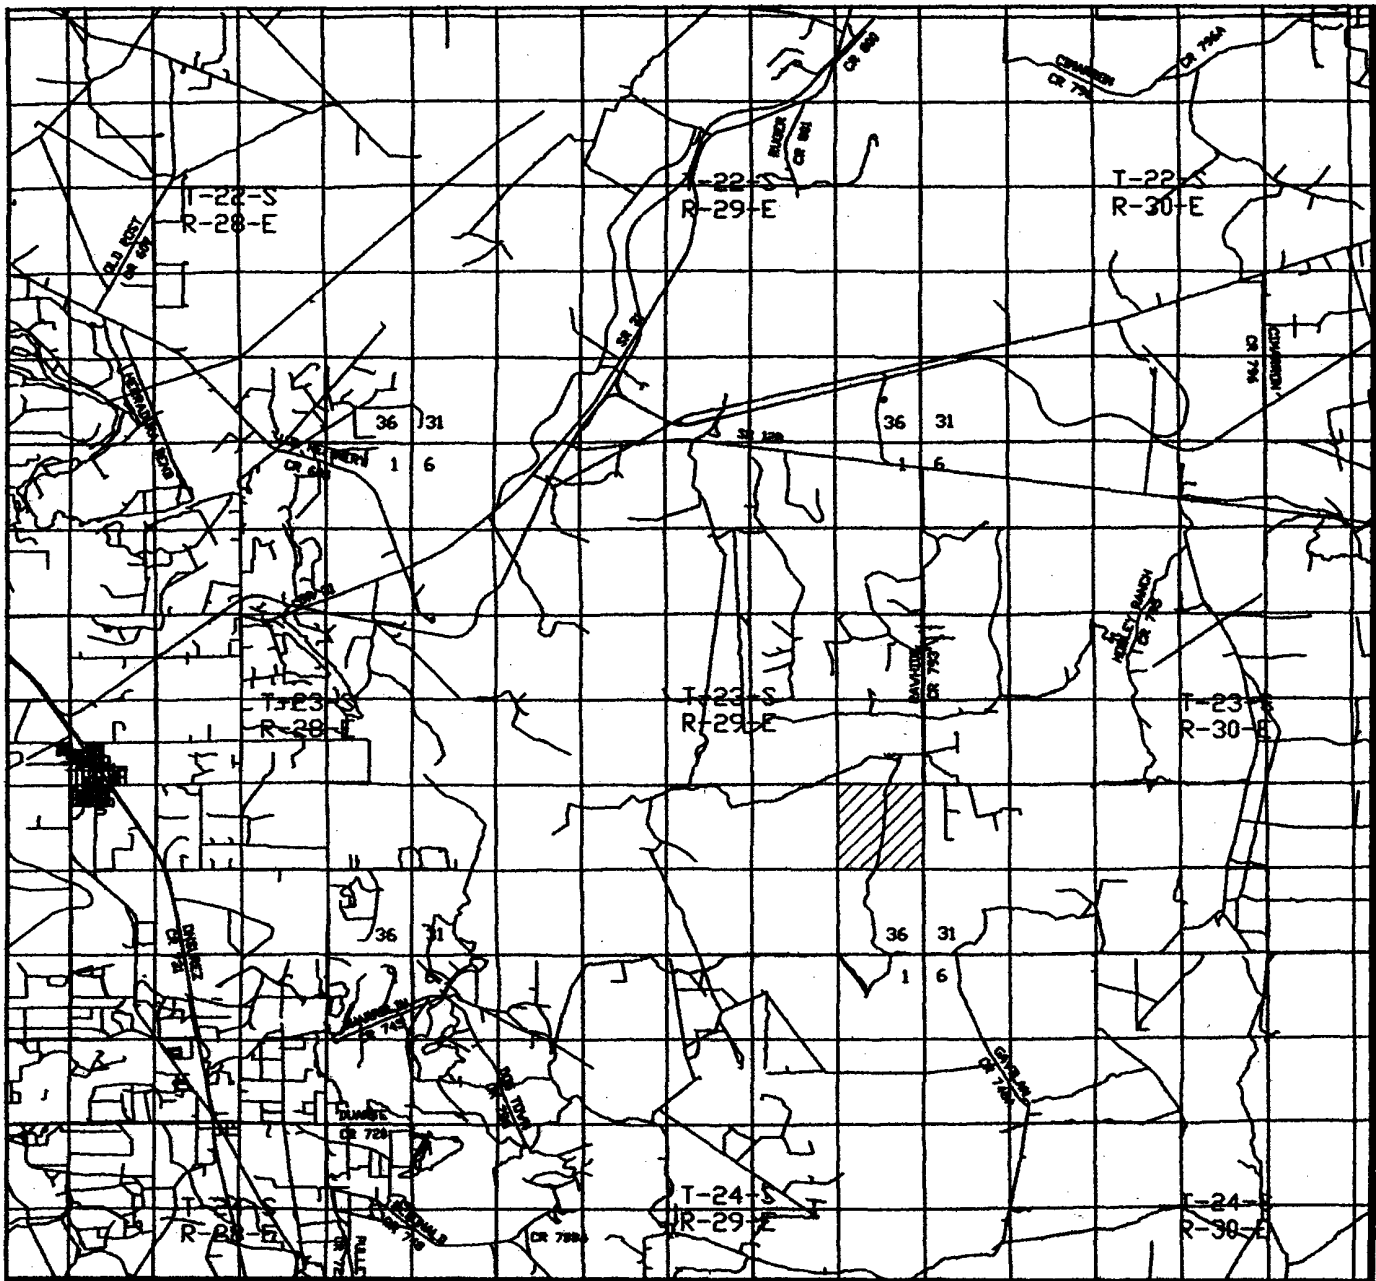

REMUDA BASIN "25" STATE #1
 Located at 1980' FSL and 660' FEL
 Section 25, Township 23 South, Range 29 East,
 N.M.P.M., Eddy County, New Mexico.

**basin
surveys**

focused on excellence
in the oilfield

P.O. Box 1786
 1120 N. West County Rd.
 Hobbs, New Mexico 88241
 (505) 393-7316 - Office
 (505) 392-3074 - Fax
 basinsurveys.com

W.O. Number: JMS 6485T

Survey Date: 04-18-2006

Scale: 1" = 2000'

Date: 04-20-2006

BEPCO., L.P.



Directional Services

Job Number: 0611175051622

Company: Bepco, L.P.

Lease/Well: Remuda Basin State 25-1

Location: Eddy County, New Mexico

Rig Name: Adobe Iron Horse

RKB: 18'

G.L. or M.S.L.: GL

State/Country: New Mexico/USA

Declination: 8.88°

Grid: East To Grid

File name: F:\SURVEY\2006SU~1\BEPOL~1\REMUD251.SVY

Date/Time: 06-Nov-06 / 10:44

Curve Name: Surface - 10900' M.D.

We hereby certify that our survey data from
Surface MD to 10,900' MD is, to the best of
our knowledge a true and accurate account of the
well bore.

Chris Dutton 11/6/06
Multi-Shot Date

WINSERVE SURVEY CALCULATIONS
Minimum Curvature Method
Vertical Section Plane .00
Vertical Section Referenced to Wellhead
Rectangular Coordinates Referenced to Wellhead

Measured Depth FT	Incl Angle Deg	Drift Direction Deg	True Vertical Depth	N-S FT	E-W FT	Vertical Section FT	C L O S U R E		Dogleg Severity Deg/100
							Distance FT	Direction Deg	
.00	.00	.00	.00	.00	.00	.00	.00	.00	.00
100.00	.25	163.18	100.00	-.21	.06	-.21	.22	163.18	.25
200.00	.25	159.05	200.00	-.62	.20	-.62	.65	161.80	.02
300.00	.25	155.93	300.00	-1.02	.37	-1.02	1.09	160.08	.01
400.00	.25	165.80	400.00	-1.44	.51	-1.44	1.52	160.30	.04
500.00	.25	170.68	500.00	-1.86	.60	-1.86	1.96	162.07	.02
600.00	.25	155.56	599.99	-2.28	.73	-2.28	2.39	162.26	.07
700.00	.25	181.43	699.99	-2.69	.81	-2.69	2.81	163.20	.11
800.00	.25	198.31	799.99	-3.12	.74	-3.12	3.20	166.66	.07
900.00	.25	208.18	899.99	-3.52	.57	-3.52	3.56	170.83	.04
1000.00	.50	219.06	999.99	-4.05	.19	-4.05	4.05	177.32	.26

Measured Depth FT	Incl Angle Deg	Drift Direction Deg	True Vertical Depth	N-S FT	E-W FT	Vertical Section FT	C L O S U R E		Dogleg Severity Deg/100
							Distance FT	Direction Deg	
1100.00	.75	215.93	1099.98	-4.92	-.47	-4.92	4.94	185.45	.25
1200.00	.75	233.81	1199.98	-5.83	-1.38	-5.83	5.99	193.33	.23
1300.00	.75	245.68	1299.97	-6.49	-2.51	-6.49	6.96	201.12	.16
1400.00	1.25	237.55	1399.95	-7.34	-4.02	-7.34	8.37	208.71	.52
1500.00	1.25	244.43	1499.93	-8.40	-5.93	-8.40	10.28	215.21	.15
1600.00	1.50	264.31	1599.90	-9.00	-8.21	-9.00	12.19	222.38	.53
1700.00	1.50	271.69	1699.87	-9.09	-10.82	-9.09	14.14	229.97	.19
1800.00	2.75	287.58	1799.80	-8.33	-14.42	-8.33	16.65	239.99	1.37
1900.00	3.25	293.47	1899.66	-6.48	-19.31	-6.48	20.36	251.46	.59
2000.00	3.25	293.35	1999.50	-4.22	-24.51	-4.22	24.87	260.22	.01
2100.00	3.00	294.22	2099.35	-2.03	-29.50	-2.03	29.57	266.07	.25
2200.00	2.50	289.08	2199.23	-.24	-33.95	-.24	33.95	269.60	.56
2300.00	2.50	290.96	2299.14	1.25	-38.04	1.25	38.06	271.89	.08
2400.00	2.00	302.83	2399.06	2.98	-41.55	2.98	41.65	274.10	.68
2500.00	.75	337.70	2499.03	4.53	-43.26	4.53	43.50	275.98	1.45
2600.00	.50	86.57	2599.03	5.16	-43.07	5.16	43.38	276.84	1.03
2700.00	.75	102.51	2699.02	5.05	-42.00	5.05	42.30	276.85	.30
2800.00	1.75	131.52	2799.00	3.89	-40.22	3.89	40.41	275.53	1.15
2900.00	3.00	137.55	2898.91	.95	-37.31	.95	37.32	271.46	1.27
3000.00	3.25	138.56	2998.76	-3.11	-33.67	-3.11	33.81	264.73	.26
3100.00	2.75	139.54	3098.62	-7.06	-30.23	-7.06	31.05	256.86	.50
3200.00	2.00	140.53	3198.54	-10.23	-27.57	-10.23	29.40	249.64	.75
3300.00	1.25	141.52	3298.50	-12.43	-25.78	-12.43	28.62	244.26	.75
3400.00	1.25	139.52	3398.47	-14.11	-24.39	-14.11	28.18	239.95	.04
3500.00	1.00	147.52	3498.45	-15.68	-23.22	-15.68	28.01	235.97	.29
3600.00	.75	149.52	3598.44	-16.98	-22.42	-16.98	28.12	232.86	.25
3700.00	.75	159.52	3698.43	-18.16	-21.85	-18.16	28.41	230.28	.13
3800.00	.75	153.52	3798.42	-19.35	-21.33	-19.35	28.80	227.78	.08
3900.00	.75	160.52	3898.42	-20.56	-20.82	-20.56	29.26	225.37	.09
4000.00	.50	162.52	3998.41	-21.59	-20.47	-21.59	29.75	223.48	.25
4100.00	.75	160.52	4098.40	-22.62	-20.12	-22.62	30.28	221.65	.25
4200.00	.50	167.52	4198.40	-23.67	-19.81	-23.67	30.86	219.93	.26

Measured Depth FT	Incl Angle Deg	Drift Direction Deg	True Vertical Depth	N-S FT	E-W FT	Vertical Section FT	C L O S U R E		Dogleg Severity Deg/100
							Distance FT	Direction Deg	
4300.00	.50	165.52	4298.39	-24.52	-19.61	-24.52	31.39	218.66	.02
4400.00	.50	187.52	4398.39	-25.37	-19.56	-25.37	32.03	217.63	.19
4500.00	.50	175.52	4498.39	-26.24	-19.58	-26.24	32.74	216.73	.10
4600.00	.75	185.52	4598.38	-27.32	-19.61	-27.32	33.63	215.66	.27
4700.00	.50	175.52	4698.37	-28.41	-19.64	-28.41	34.54	214.65	.27
4800.00	.50	175.52	4798.37	-29.28	-19.57	-29.28	35.22	213.76	.00
4900.00	.50	173.52	4898.37	-30.15	-19.49	-30.15	35.90	212.88	.02
5000.00	.50	180.52	4998.36	-31.02	-19.44	-31.02	36.61	212.08	.06
5100.00	.50	182.53	5098.36	-31.89	-19.46	-31.89	37.36	211.40	.02
5200.00	.75	170.53	5198.35	-32.97	-19.38	-32.97	38.24	210.44	.28
5300.00	.75	175.53	5298.35	-34.27	-19.22	-34.27	39.29	209.28	.07
5400.00	1.00	182.53	5398.33	-35.79	-19.20	-35.79	40.62	208.21	.27
5500.00	1.00	191.53	5498.32	-37.52	-19.42	-37.52	42.25	207.36	.16
5600.00	1.00	193.53	5598.30	-39.23	-19.80	-39.23	43.94	206.78	.03
5700.00	1.00	194.53	5698.29	-40.92	-20.22	-40.92	45.64	206.30	.02
5800.00	.75	189.53	5798.28	-42.41	-20.55	-42.41	47.12	205.85	.26
5900.00	.75	187.53	5898.27	-43.70	-20.74	-43.70	48.37	205.39	.03
6000.00	.75	185.53	5998.26	-45.00	-20.89	-45.00	49.61	204.90	.03
6100.00	1.00	173.54	6098.25	-46.52	-20.85	-46.52	50.98	204.15	.31
6200.00	1.00	177.54	6198.23	-48.26	-20.72	-48.26	52.52	203.23	.07
6300.00	1.00	182.54	6298.22	-50.00	-20.72	-50.00	54.13	202.51	.09
6400.00	1.25	176.54	6398.20	-51.96	-20.69	-51.96	55.93	201.71	.28
6500.00	1.25	180.54	6498.17	-54.14	-20.64	-54.14	57.94	200.86	.09
6600.00	1.25	177.54	6598.15	-56.32	-20.60	-56.32	59.97	200.09	.07
6700.00	1.25	178.54	6698.13	-58.50	-20.53	-58.50	62.00	199.33	.02
6800.00	1.25	180.54	6798.10	-60.69	-20.51	-60.69	64.06	198.67	.04
6900.00	1.25	189.54	6898.08	-62.85	-20.70	-62.85	66.17	198.23	.20
7000.00	1.25	203.53	6998.06	-64.93	-21.32	-64.93	68.34	198.17	.30
7100.00	1.25	187.54	7098.03	-67.01	-21.89	-67.01	70.50	198.09	.35
7200.00	1.25	199.54	7198.01	-69.12	-22.40	-69.12	72.66	197.96	.26
7300.00	1.50	226.53	7297.98	-71.05	-23.72	-71.05	74.90	198.46	.69
7400.00	1.50	230.54	7397.95	-72.78	-25.68	-72.78	77.18	199.43	.10

Measured Depth FT	Incl Angle Deg	Drift Direction Deg	True Vertical Depth	N-S FT	E-W FT	Vertical Section FT	C L O S U R E		Dogleg Severity Deg/100
							Distance FT	Direction Deg	
7500.00	2.25	228.52	7497.89	-74.91	-28.16	-74.91	80.03	200.60	.75
7600.00	2.25	222.52	7597.81	-77.66	-30.96	-77.66	83.60	201.73	.24
7700.00	1.75	220.53	7697.75	-80.27	-33.27	-80.27	86.89	202.52	.50
7800.00	2.00	269.55	7797.71	-81.44	-36.01	-81.44	89.05	203.85	1.57
7900.00	3.25	269.54	7897.60	-81.48	-40.59	-81.48	91.03	206.48	1.25
8000.00	3.50	290.58	7997.43	-80.43	-46.28	-80.43	92.79	209.92	1.26
8100.00	4.25	300.62	8097.20	-77.47	-52.33	-77.47	93.48	214.04	1.01
8200.00	3.75	302.60	8196.96	-73.82	-58.27	-73.82	94.05	218.29	.52
8300.00	3.50	301.60	8296.76	-70.45	-63.63	-70.45	94.93	222.09	.26
8400.00	2.75	302.58	8396.61	-67.56	-68.25	-67.56	96.04	225.29	.75
8500.00	2.00	305.57	8496.52	-65.26	-71.69	-65.26	96.94	227.69	.76
8600.00	1.50	294.93	8596.47	-63.69	-74.30	-63.69	97.86	229.40	.59
8700.00	1.00	273.30	8696.45	-63.09	-76.36	-63.09	99.05	230.44	.68
8800.00	1.00	243.67	8796.44	-63.43	-78.01	-63.43	100.54	230.89	.51
8900.00	1.00	214.05	8896.42	-64.54	-79.28	-64.54	102.23	230.85	.51
9000.00	1.50	206.42	8996.40	-66.43	-80.35	-66.43	104.26	230.42	.53
9100.00	1.75	197.79	9096.36	-69.06	-81.40	-69.06	106.75	229.69	.35
9200.00	2.25	193.17	9196.30	-72.42	-82.31	-72.42	109.64	228.66	.52
9300.00	2.25	200.53	9296.22	-76.17	-83.45	-76.17	112.99	227.61	.29
9400.00	2.50	206.90	9396.13	-79.95	-85.12	-79.95	116.79	226.79	.36
9500.00	3.25	218.25	9496.01	-84.13	-87.87	-84.13	121.65	226.25	.94
9600.00	3.50	214.62	9595.83	-88.86	-91.35	-88.86	127.45	225.79	.33
9700.00	3.75	191.03	9695.64	-94.59	-93.71	-94.59	133.15	224.73	1.50
9800.00	4.75	183.43	9795.36	-101.93	-94.59	-101.93	139.06	222.86	1.15
9900.00	4.25	192.65	9895.06	-109.68	-95.65	-109.68	145.53	221.09	.88
10000.00	4.00	201.01	9994.80	-116.55	-97.71	-116.55	152.09	219.97	.65
10100.00	3.75	200.39	10094.57	-122.87	-100.10	-122.87	158.48	219.17	.25
10200.00	3.50	201.77	10194.37	-128.77	-102.37	-128.77	164.50	218.48	.26
10300.00	3.50	198.15	10294.18	-134.51	-104.45	-134.51	170.30	217.83	.22
10400.00	3.25	199.52	10394.01	-140.08	-106.35	-140.08	175.88	217.21	.26
10500.00	3.25	200.27	10493.85	-145.41	-108.28	-145.41	181.30	216.67	.04
10600.00	3.50	202.01	10593.68	-150.90	-110.41	-150.90	186.98	216.19	.27

Measured Depth FT	Incl Angle Deg	Drift Direction Deg	True Vertical Depth	N-S FT	E-W FT	Vertical Section FT	CLOSURE		Dogleg Severity Deg/100
							Distance FT	Direction Deg	
10700.00	3.50	198.77	10693.49	-156.62	-112.53	-156.62	192.85	215.70	.20
10800.00	2.50	194.53	10793.35	-161.62	-114.06	-161.62	197.82	215.21	1.02
Last Survey Depth Recorded									
10900.00	1.75	212.02	10893.28	-165.03	-115.42	-165.03	201.38	214.97	.98