

Submit 3 Copies To Appropriate District
Office
District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM
87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
May 27, 2004

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-015-32451
5. Indicate Type of Lease STATE ☐ FEE ☒
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name Bond Fee 01
9. OGRID Number 155615
10. Pool name or Wildcat Bass Strawn Gas

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A
DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH
PROPOSALS.)

1. Type of Well: Oil Well ☐ Gas Well ☒ Other

2. Name of Operator
Nadel and Gussman Permian, L.L.C.

DEC 10 2007

3. Address of Operator
601 North Marienfeld, Suite 508, Midland, Texas 79701

OCD-ARTESIA

4. Well Location

Unit Letter N : 1980 feet from the North line and 1980 feet from the West line
Section 20 Township 21-S Range 28-E NMPM County Eddy

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
3,195' GL

Pit or Below-grade Tank Application ☐ or Closure ☐

Pit type steel Depth to Groundwater Distance from nearest fresh water well Distance from nearest surface water

Pit Liner Thickness: steel mil Below-Grade Tank: Volume 180 bbls; Construction Material steel

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☐
TEMPORARILY ABANDON ☒ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☐
CASING/CEMENT JOB ☐
OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Request TA status for 1 year. This well was shut in on 11/27/06. It shares the same 160 dedication as the Bond #2

We plan request a simultaneous dedication for the Bond #1 and #2 in the next 12 months.

10/25/07. Ru pump truck on tbg csg annulus pressure up to 500 psi for 1 hr no leak off.

Temporary Abandoned Status approved
and 11/27/2008

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☒, a general permit ☐ or an (attached) alternative OCD-approved plan ☐.


SIGNATURE Kem E. McCready TITLE NM Operations Manager DATE 11/07/07

Type or print name: Kem E. McCready

E-mail address: kemm@naguss.com Telephone No. 432-682-4429

For State Use Only

APPROVED BY: RICHARD /NGS TITLE Compliance Officer DATE 1/2/08
Conditions of Approval (if any):

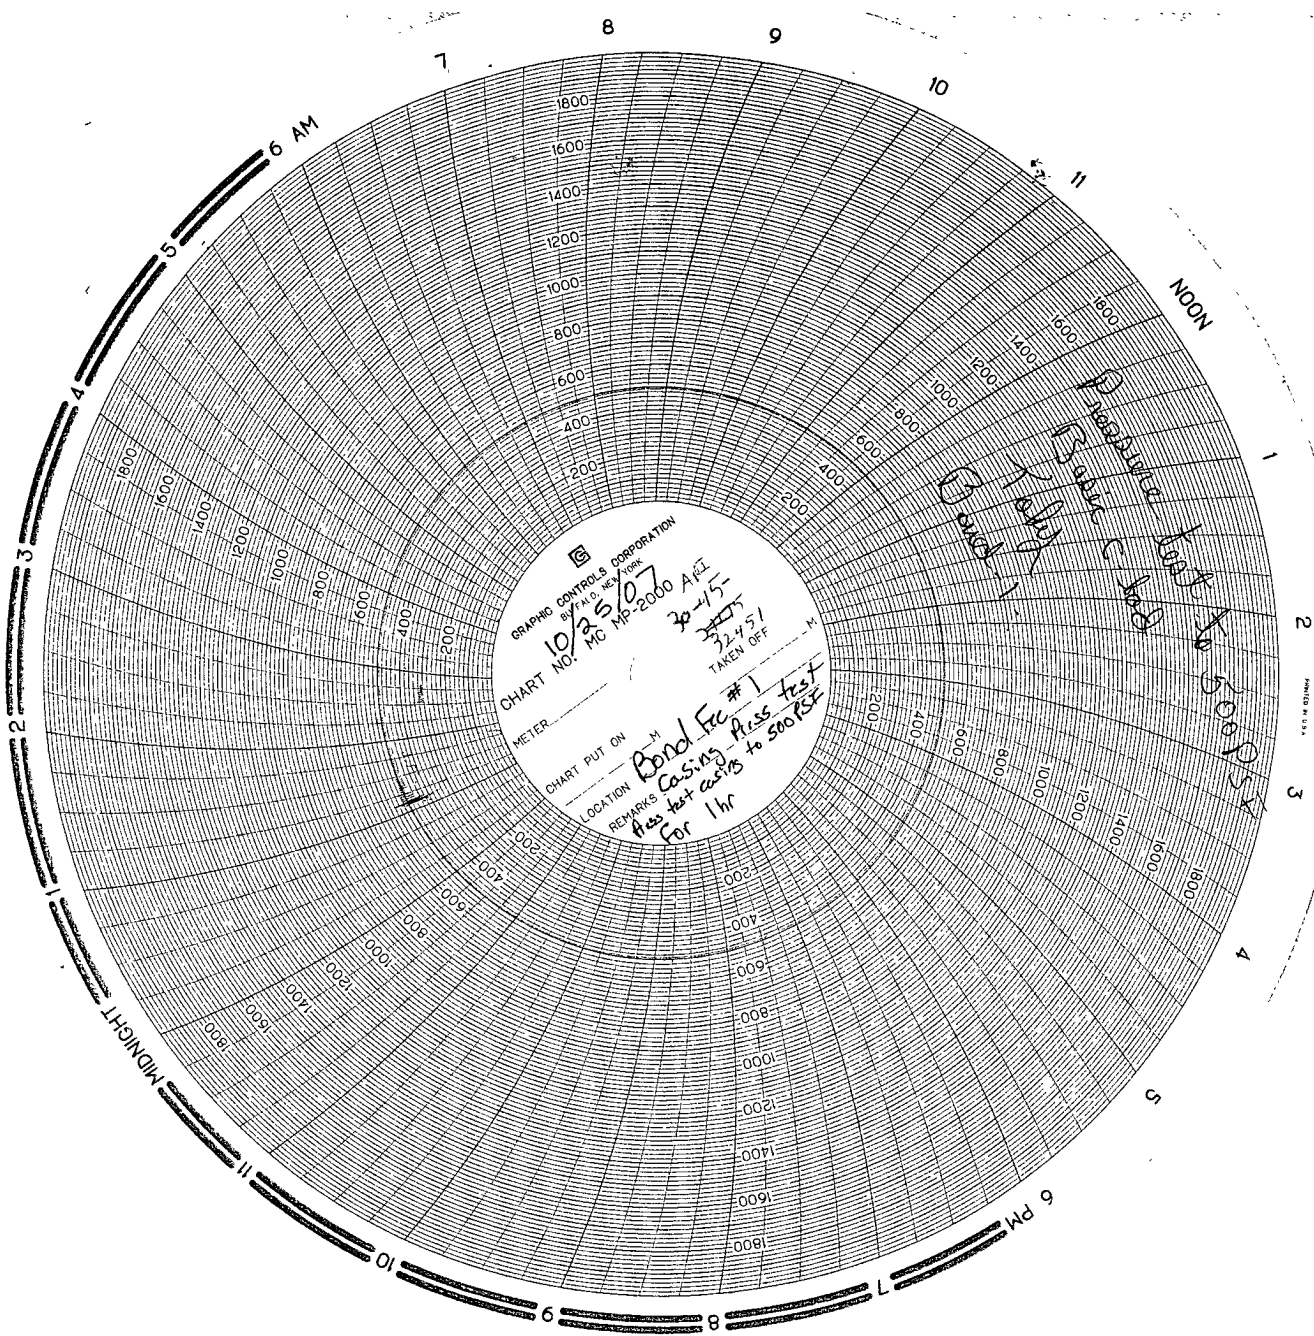

Nadel & Gussman Permian, L.L.C.

LEASE **Bond**
FIELD **Bass Strawn**
LOCATION **1980 FNL 1860 FWL**
SPUD DATE **9/27/2002**
CONTRACTOR

WELL NO. **1**
COUNTY **Eddy**
LEGAL **Sec 20 T21 S R 28 E**
DRAWN BY **KEM**
DATE **11/18/2003**

API # **30 - 015 - 21175**
STATE **New Mexico**
GL **3320'**
DF.
KB **+12.5**

Bond Well No. 1

Hole Size
Csg Design

17-1/2" Hole
13-3/8", 48#
H-40 ST&C
Set @ 506' w/
400 sxs circ

12-1/4" hole
9-5/8", 40#
J-55, LT&C
Set @ 3011'
Cmt w/ 1135 sxs
Circ

DV Tool @ 5586'

7", 26#
P-110 LT&C
8-3/4" Hole
Cmt w/ 1455 sxs
Toc @ 1444

All depths include 12.47' of KB

TUBING DETAILS

ITEM	NOM OD in	PPF	GRD	MAX OD	MIN ID	LENGTH	BTM DEPTH
1 Kawasaki Fox 13%Cr	2-7/8	6.5	13Cr	3.297	2.441	31.64	44.1
2 Kawasaki Fox 13%Cr Subs	2-7/8	6.5	13Cr	3.297	2.441	33	72.8
3 Kawasaki Fox 13%Cr	2-7/8	6.5	13Cr	3.297	2.441	10499	10571.4
4 Xvr Fox x 8rd 13% CR	2-7/8	6.5#	13Cr	3.5	2.441	0.85	10572.2
5 Baker Mod L-10 on/off tool							
w/ 2 313 X profile 13% Cr	5.5	na	13Cr	5.5	2.313	1.8	10574.0
6 2-7/8" B x 2-7/8" 6.5# BTS pin 13% Cr							
seal assembly size 80-32 E22S							
w/ 2 Ryte seal units & 1/2 MS	4.624	na	13Cr	4.624	2.406	0.99	10575.0
7 Baker Mod D pkr w/ Atlas pking element							
size 84-32 middle element							
at 10,575	5.687	na	13Cr	5.687	3.25	3.06	10578.1
8 Baker 94-32 Mod DB guide shoe							
2-7/8" Vam Box	5.667	na	13Cr	5.667	2.441	0.99	10579.1
9 8" 2-7/8" pup jt Vam B X P	3.5	7.7	13Cr	3.25	2.374	7.46	10586.5
10 2 313 BX Seating Nipple							
Vam Box x 2-7/8" EUE Pin	3.5	na	13Cr	3.25	2.313	1.14	10587.7
11 8" 2-7/8" pup jt Vam B X P	3.5	7.7	13Cr	3.25	2.374	8.11	10595.8
12 2 313 BXN Seating Nipple							
Vam Box x 2-7/8" EUE Pin	3.5	na	13Cr	3.25	2.205	1.14	10596.9
13 2-7/8" Dual Magmumdisk							
tbg plug 2-7/8" B x P	3.5	na	13Cr	3.67	2.441	1.82	10598.7
14 2-7/8" WRE Guide							
15 WRE guide	3.668	na	na	3.668	2.441	0.66	10599.4

Strawn OH

10,685-10,770

TD @ 10,770'