
District II 1301 W. Grand Ave , Artesia, NM 88210 District III 1000 Rio Brazos Rd , Aztec, NM 87410 District IV 1220 South St. Francis Dr. Santa Fe, NM 87505 SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.) 1. Type of Well: Oil Well Gas Well Other -Convert to SWD OIL CONSERVATION DIVISION 1220 South St. Francis Dr. STATE FEE 6. State Oil & Gas Lease No. 7. Lease Name or Unit Agreement Name ORE IDA 14 FEDERAL 8. Well Number FEB 06 2008	Submit 3 Copies To Appropriate District Office <u>District I</u> 1625 N. French Dr., Hobbs, NM 88240	State of New M Energy, Minerals and Nat	ural Resources	Form C-103 May 27, 2004 ELL API NO.		
DOND TUSE THIS FORM FOR PROPOSALS TO DEFIEN OR PLUIG BACK TO A DIFFERENT RESERVOR. USE "APPLICATION FOR PREMIT" (OMM CLOIP) FOR SUCI.	District II 1301 W. Grand Ave, Artesia, NM 88210 District III 1000 Rio Brazos Rd, Aztec, NM 87410 District IV 1220 S. St. Francis Dr, Santa Fe, NM 87505	1220 South St. Francis Dr.		30-015-29243 Indicate Type of Lease STATE FEE FEE		
1. Type of Well: Oil Well Gas Well Other -Convert to SWD S. Well Number S. FEB 06 2008	(DO NOT USE THIS FORM FOR PROPO DIFFERENT RESERVOIR. USE "APPLIC	SALS TO DR'ILL OR TO DEEPEN OR PL	LUG BACK TO A O	<u>-</u>		
3. Address of Operator 20 North Broadway, Ste 1500, Oklahoma City, OK 73102 405-552-4615 10. Pool name or Wildeat 20 North Broadway, Ste 1500, Oklahoma City, OK 73102 405-552-4615 10. Pool name or Wildeat 20 North Broadway, Ste 1500, Oklahoma City, OK 73102 405-552-4615 10. Pool name or Wildeat 20 North Broadway, Ste 1500, Oklahoma City, OK 73102 405-552-4615 10. Pool name or Wildeat 20 North Broadway, Ste 1500, Oklahoma City, OK 73102 405-552-4615 20 North Broadway, Ste 1500, Oklahoma City, OK 73102 405-552-4615 20 North Broadway, Ste 1500, Oklahoma City, OK 73102 405-552-4615 20 North Broadway, Ste 1500, Oklahoma City, OK 73102 405-552-4615 20 North Broadway, Ste 1500, Oklahoma City, OK 73102 405-552-4615 20 North Broadway, Ste 1500, Oklahoma City, OK 73102 405-552-4615 20 North Broadway, Ste 1500, Oklahoma City, OK 73102 20 North Broadway, Ste 1500, Oklahoma City, OK 73102 20 North Broadway, Ste 1500, Oklahoma City, OK 73102 20 North Broadway, Ste 1500, Oklahoma City, Oklahoma Cit						
3. Address of Operator 20 North Broadway, Ste 1500, Oklahoma City, OK 73102 405-552-4615 10. Pool name or Wilder 20 North Broadway, Ste 1500, Oklahoma City, OK 73102 405-552-4615 DELWARE BELL CANYON 4. Well Location Unit Letter B		Y PRODUCTION COMPANY.		OUTD NUMBER OF THE RESERVENCE		
Well Location	3. Address of Operator		10	. Pool name or Wildcat		
Unit Letter_B		Manoma City, OK 75102	403-332-4013	DEEWAKE BELL CANTON		
The Elevation (Show whether DR, RKB, RT, GR, etc.) 2974' KB; 2960' GL		:935'feet from the _NORTI	H line and _1705'	feet from the EAST line		
2974* KB; 2960* GL Pit or Below-grade Tank Application Or Closure Distance from nearest fresh water well Distance from nearest surface water Pit Liner Thickness: mil Below-Grade Tank: Volume bbls: Construction Material	Section 14			NMPM County EDDY		
Pit type		2974' KB; 2960' GL	R, RKB, RT, GR, etc.)	Convert to the second s		
Pit Liner Thickness: mil Below-Grade Tank: Volume bbls; Construction Material						
12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data NOTICE OF INTENTION TO:						
NOTICE OF INTENTION TO: PERFORM REMEDIAL WORK						
PERFORM REMEDIAL WORK PLUG AND ABANDON REMEDIAL WORK ALTERING CASING TEMPORARILY ABANDON CHANGE PLANS COMMENCE DRILLING OPNS PAND A PULL OR ALTER CASING MULTIPLE COMPL CASING/CEMENT JOB OTHER: CASING MULTIPLE COMPL OTHER: CASING/CEMENT JOB OTHER: CASING/CEMENT JO	12. Check A	Appropriate Box to Indicate I	Nature of Notice, Rej	port or Other Data		
13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion. 1. MIRU. RIH & set CIBP @ 3,725'. Dump bail 35' cement on top. Calc. PBD @ 3,690'. (per C108 requirement). 2. RIH and perforate Delaware Bell Canyon zone for SWD at 3182' − 3204'; 3214' − 3234'; 3246' − 3280'; 3360' − 3380'; 3474' − 3490', 2 SPF. 3. TIH w/work sting and stimulate Delaware Bell Canyon w/+/- 5000 gallons acid & frac w/+/-120,000# proppant. 4. RIH w/5-1/2" IPC packer & 2-3/8" IPC tubing. Set packer at +/- 3,130'. Load annulus w/packer fluid & perform MIT test on casing. Chart results. (Note: Notify OCD 24 hrs in advance prior to performing MIT test). 5. Wellhead injection pressure shall be limited to 636 psi per approved C108. Equip well w/pressure limiting device so as not to exceed surface injection pressure of 636 psi. 6. Commence water disposal in Delaware Bell Canyon perforations from 3,182' to 3,490'. 7. Report date injection starts, injection volume, and injection pressure. ACCEPTED for record NMOCD guidelines □, a general permit □ or an (attached) alternative OCD-approved plan □. SIGNATURE □ BUWL □ TITLE □ Engineering Technician □ DATE □ 2/4/08 □ Type or print name Ronnie Slack □ E-mail address: Ronnie.Slack@dvn.com □ Telephone No. 405-552-4615 For State Use Only	PERFORM REMEDIAL WORK PLUG AND ABANDON REMEDIAL WORK ALTERING CASING COMMENCE DRILLING OPNS. P AND A COMMENCE DRILLING OPNS.					
13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion. 1. MIRU. RIH & set CIBP @ 3,725'. Dump bail 35' cement on top. Calc. PBD @ 3,690'. (per C108 requirement). 2. RIH and perforate Delaware Bell Canyon zone for SWD at 3182' − 3204'; 3214' − 3234'; 3246' − 3280'; 3360' − 3380'; 3474' − 3490', 2 SPF. 3. TIH w/work sting and stimulate Delaware Bell Canyon w/+/- 5000 gallons acid & frac w/+/-120,000# proppant. 4. RIH w/5-1/2" IPC packer & 2-3/8" IPC tubing. Set packer at +/- 3,130'. Load annulus w/packer fluid & perform MIT test on casing. Chart results. (Note: Notify OCD 24 hrs in advance prior to performing MIT test). 5. Wellhead injection pressure shall be limited to 636 psi per approved C108. Equip well w/pressure limiting device so as not to exceed surface injection pressure of 636 psi. 6. Commence water disposal in Delaware Bell Canyon perforations from 3,182' to 3,490'. 7. Report date injection starts, injection volume, and injection pressure. ACCEPTED for record NMOCD guidelines □, a general permit □ or an (attached) alternative OCD-approved plan □. SIGNATURE □ BUWL □ TITLE □ Engineering Technician □ DATE □ 2/4/08 □ Type or print name Ronnie Slack □ E-mail address: Ronnie.Slack@dvn.com □ Telephone No. 405-552-4615 For State Use Only	OTHER: MConvert to SWD A	dmin Order SWD-1113	OTHER:	П		
2. RIH and perforate Delaware Bell Canyon zone for SWD at 3182' – 3204'; 3214' – 3234'; 3246' – 3280'; 3360' – 3380'; 3474' – 3490', 2 SPF. 3. TIH w/work sting and stimulate Delaware Bell Canyon w/+/- 5000 gallons acid & frac w/+/-120,000# proppant. 4. RIH w/5-1/2" IPC packer & 2-3/8" IPC tubing. Set packer at +/- 3,130'. Load annulus w/packer fluid & perform MIT test on casing. Chart results. (Note: Notify OCD 24 hrs in advance prior to performing MIT test). 5. Wellhead injection pressure shall be limited to 636 psi per approved C108. Equip well w/pressure limiting device so as not to exceed surface injection pressure of 636 psi. 6. Commence water disposal in Delaware Bell Canyon perforations from 3,182' to 3,490'. 7. Report date injection starts, injection volume, and injection pressure. Thereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines \(\), a general permit \(\) or an (attached) alternative OCD-approved plan \(\). SIGNATURE \(\) Summe \(\) Su	13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion					
5. Wellhead injection pressure shall be limited to 636 psi per approved C108. Equip well w/pressure limiting device so as not to exceed surface injection pressure of 636 psi. 6. Commence water disposal in Delaware Bell Canyon perforations from 3,182' to 3,490'. 7. Report date injection starts, injection volume, and injection pressure. I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or belowgrade tank has been/will be constructed or closed according to NMOCD guidelines, a general permit or an (attached) alternative OCD-approved plan SIGNATURE	 RIH and perforate Delaware Bell Canyon zone for SWD at 3182' – 3204'; 3214' – 3234'; 3246' – 3280'; 3360' – 3380'; 3474' – 3490', 2 SPF. TIH w/work sting and stimulate Delaware Bell Canyon w/+/- 5000 gallons acid & frac w/+/-120,000# proppant. RIH w/5-1/2" IPC packer & 2-3/8" IPC tubing. Set packer at +/- 3,130'. Load annulus w/packer fluid & perform MIT 					
6. Commence water disposal in Delaware Bell Canyon perforations from 3,182' to 3,490'. 7. Report date injection starts, injection volume, and injection pressure. I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or belowgrade tank has been/will be constructed or closed according to NMOCD guidelines, a general permit or an (attached) alternative OCD-approved plan SIGNATURE	5. Wellhead injection pressure shall be limited to 636 psi per approved C108. Equip well w/pressure limiting device so					
7. Report date injection starts, injection volume, and injection pressure. Accepted for record NMOCD 27			famatiana fuana 2.400' t	- 2.400		
I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines, a general permit or an (attached) alternative OCD-approved plan SIGNATURE			·	•		
I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines, a general permit or an (attached) alternative OCD-approved plan SIGNATURE	·			NMOCD		
grade tank has been/will be constructed or closed according to NMOCD guidelines , a general permit or an (attached) alternative OCD-approved plan . SIGNATURE				7411000 727		
Type or print name For State Use Only APPROVED BY:						
For State Use Only APPROVED BY: DATE	SIGNATURE KOMME &	lack title	Engineering Technic	cianDATE2/4/08		
	••	k E-mail address: J	Ronnie.Slack@dvn.com	Telephone No. 405-552-4615		
		TITLE_		DATE		



DEVON	ENERGY F	PRODUCTION COMPANY LP	
Well Name: Ore Ida 14 Federal #5		Field: CEDAR CANYON DELAWARE	
Location: 935' FNL & 1705' FEL; Sec 14-T24S-R29E		County: EDDY State: NM	
Elevation: 2974' KB; 2960' GL		Spud Date: 11/30/96	
API#: 30-015-29243 Prepared by: Ronnie S	Slack	Date: 12/22/06 Rev:	
### CURRENT SCHEMAT 17-1/2" hole 13-3/8", 48#, H40, 8RD, STC @ 351' Cemented w/325 sx to surface TOC @ 2970' (CBL-1/1/97) 12-1/4" hole 8-5/8", 32#, J55, 8RD, STC, @ 3117' Cemented w/1300 sx to surface DV Tool @ 5,428' BRUSHY CANYON (4/25/97)		35' Cement. PBD @ 6,585' CIBP @ 6,620' (10/5/05)	
6,668'- 6,704' 4-26-97 acidize w/5K gals 5-2-97: fraced w/42K# 5-16-97: 15 bo, 174 bw			
BONE SPRING (1/1/97) 7,864'- 8,141' 3-17-97: 33 bo, 132 bw, 175 mcf	LANKE O MATE	4-25-98: TAC parts pushed to 8263'	
7-7/8" Hole <u>5-1/2", 17#, J55, 8RD, LTC, @ 8,350'</u> Cemented w/1036 sx.	Z. TI	PBD @ 8,263' D @ 8,350'	

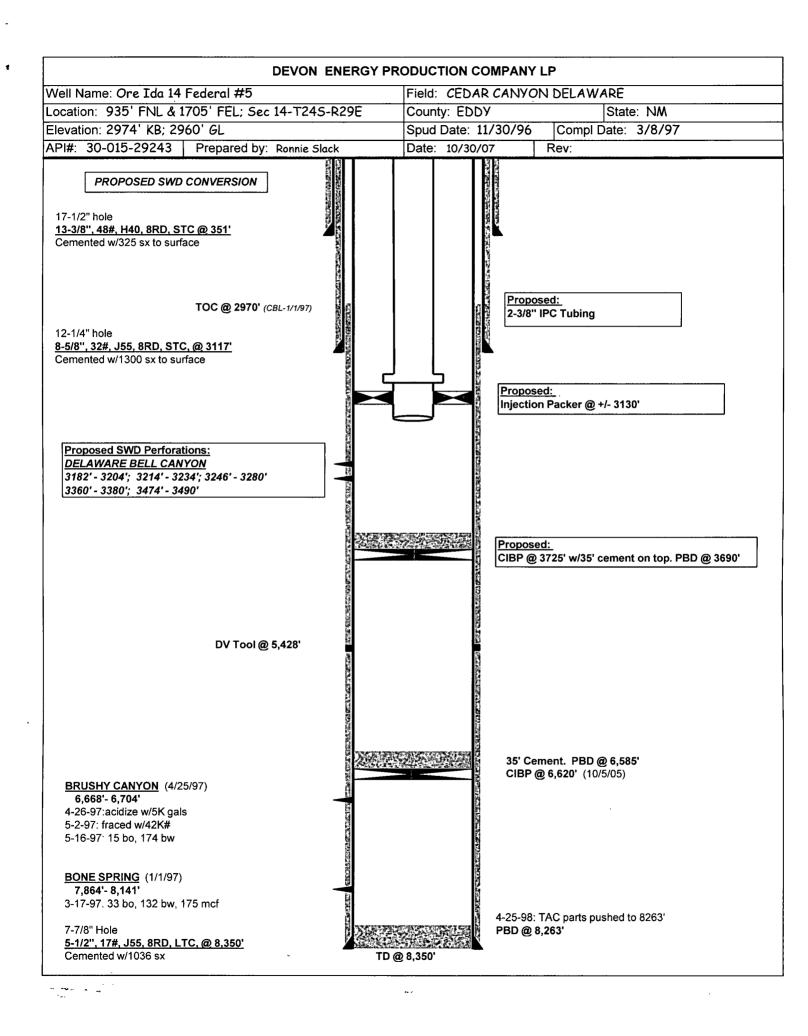

NEW MEXICO ENERGY, MINERALS and NATURAL RESOURCES DEPARTMENT

BILL RICHARDSON
Governor
Joanna Prukop
Cabinet Secretary

Mark E. Fesmire, P.E.
Director
Oil Conservation Division

Administrative Order SWD-1113

APPLICATION OF DEVON ENERGY PRODUCTION COMPANY, LP FOR PRODUCED WATER DISPOSAL, EDDY COUNTY, NEW MEXICO

ADMINISTRATIVE ORDER OF THE OIL CONSERVATION DIVISION

Under the provisions of Rule 701(B), Devon Energy Production Company, LP (OGRID 6137) made application to the New Mexico Oil Conservation Division for permission to utilize for produced water disposal its Ore Ida 14 Federal Well No. 5 (API No. 30-015-29243) located 935 feet from the North line and 1705 feet from the East line of Section 14, Township 24 South, Range 29 East, NMPM, Eddy County, New Mexico.

THE DIVISION DIRECTOR FINDS THAT:

- (1) The application has been duly filed under the provisions of Rule 701(B) of the Division Rules and Regulations;
- (2) Satisfactory information has been provided that all offset operators and surface owners have been duly notified;
- (3) The applicant has presented satisfactory evidence that all requirements prescribed in Rule 701 will be met; and
- (4) No objections have been received within the waiting period prescribed by said rule.

IT IS THEREFORE ORDERED THAT:

Devon Energy Production Company, LP is hereby authorized to utilize, its Ore Ida 14 Federal Well No. 5 (API No. 30-015-29243) located 935 feet from the North line and 1705 feet from the East line of Section 14, Township 24 South, Range 29 East, NMPM, Eddy County, New Mexico, in such manner as to permit the injection of produced water for disposal purposes into the Bell Canyon member of the Delaware formation through perforations from 3182 feet to 3490 feet and through plastic-lined tubing set with a packer located within 100 feet of the top of

the injection interval.

IT IS FURTHER ORDERED THAT:

The operator shall take all steps necessary to ensure that the injected water enters only the proposed injection interval and is not permitted to escape to other formations or onto the surface.

As preparation for injection, the operator shall plug back this well with cast iron bridge plug and cement to within approximately 200 feet of the bottom injection perforation, perforate and report any swab test results or oil shows and the initial fluid level to the Division on a sundry report.

The casing-tubing annulus shall be loaded with an inert fluid and equipped with a pressure gauge or an approved leak detection device in order to determine leakage in the casing, tubing, or packer.

After installing injection tubing, the casing shall be pressure tested from the surface to the packer setting depth to assure casing integrity.

The wellhead injection pressure on the well shall be limited to **no more than 636 psi.** In addition, the injection well or system shall be equipped with a pressure limiting device in workable condition which shall, at all times, limit surface injection pressure to the maximum allowable pressure for this well.

The Director of the Division may authorize an increase in injection pressure upon a proper showing by the operator of said well that such higher pressure will not result in migration of the injected fluid from the injection formation. Such proper showing shall consist of a valid step-rate test run in accordance with and acceptable to this office.

The operator shall notify the supervisor of the Artesia district office of the Division of the date and time of the installation of disposal equipment and of any mechanical integrity test so that the same may be inspected and witnessed.

The operator shall immediately notify the supervisor of the Artesia district office of the Division of the failure of the tubing, casing, or packer in said well and shall take such steps as may be timely and necessary to correct such failure or leakage.

PROVIDED FURTHER THAT, jurisdiction is retained by the Division for the entry of such further orders as may be necessary for the prevention of waste and/or protection of correlative rights or upon failure of the operator to conduct operations (1) to protect fresh water or (2) consistent with the requirements in this order, whereupon the Division may, after notice and hearing, terminate the injection authority granted herein.

The operator shall provide written notice of the date of commencement of injection to the

Artesia district office of the Division.

The operator shall submit monthly reports of the disposal operations on Division Form C-115, in accordance with Rule Nos. 706 and 1120 of the Division Rules and Regulations.

The injection authority granted herein shall terminate one year after the effective date of this order if the operator has not commenced injection operations into the subject well, provided however, the Division, upon written request by the operator received by the Division prior to the termination date, may grant an extension thereof for good cause shown.

Approved at Santa Fe, New Mexico, on January 29, 2008.

MARK E. FESMIRÉ, P.E.

Director

MEF/wvjj

cc: Oil

Oil Conservation Division – Artesia Bureau of Land Management – Carlsbad