

Submit 3 Copies To Appropriate District  
Office  
District I  
1625 N French Dr , Hobbs, NM 88240  
District II  
1301 W Grand Ave , Artesia, NM 88210  
District III  
1000 Rio Brazos Rd , Aztec, NM 87410  
District IV  
1220 S St Francis Dr , Santa Fe, NM  
87505

State of New Mexico  
Energy, Minerals and Natural Resources

Form C-103  
May 27, 2004

OIL CONSERVATION DIVISION  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

S

WELL API NO.	30-005-61470
5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>	
6. State Oil & Gas Lease No.	
7. Lease Name or Unit Agreement Name Badger Com	
8. Well Number	3
9. OGRID Number	255333
10. Pool name or Wildcat Undesignated Pecos Slope Abo	
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3,786' GR	
Pit or Below-grade Tank Application <input type="checkbox"/> or Closure <input type="checkbox"/>	
Pit type _____ Depth to Groundwater _____ Distance from nearest fresh water well _____ Distance from nearest surface water _____	
Pit Liner Thickness: _____ mil Below-Grade Tank: Volume _____ bbls; Construction Material _____	

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS)

1. Type of Well: Oil Well ☐ Gas Well ☒ Other

JUN 26 2008

2. Name of Operator

Lime Rock Resources A, L.P.

OCD-ARTESIA

3. Address of Operator

Heritage Plaza, 1111 Bagby St. Suite 4600, Houston, TX 77002

4. Well Location

Unit Letter P : 660 feet from the South line and 830 feet from the East line

Section 4 Township 5S Range 25E NMPM Chaves County

Pit or Below-grade Tank Application ☐ or Closure ☐

Pit type \_\_\_\_\_ Depth to Groundwater \_\_\_\_\_ Distance from nearest fresh water well \_\_\_\_\_ Distance from nearest surface water \_\_\_\_\_

Pit Liner Thickness: \_\_\_\_\_ mil Below-Grade Tank: Volume \_\_\_\_\_ bbls; Construction Material \_\_\_\_\_

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☐

TEMPORARILY ABANDON ☐ CHANGE PLANS ☐

PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐

COMMENCE DRILLING OPNS: ☐ P AND A ☒

CASING/CEMENT JOB ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

6/03/2008 MI RU - HAD TO FIND ANCHORS - SNIFF WELL HEAD WITH MONITOR FOR GAS - CUT OFF BOLTS AND HAMMER OUT - RIH WITH MMCPI WORK STRING - TAG CIBP @ 3,664' - CIRCULATE PLUGGING MUD - PUH TO 1,948' - SPOT 25 SACKS - POM - SDFD.

6/04/2008 RIH AND TAG 1,409' - CIRCULATE PLUGGING MUD - PUH TO 90' - SPOT 30 SACKS TO SURFACE - DIG OUT WELLHEAD - CUT OFF WELLHEAD - CUT OFF ANCHORS - INSTALL DRYHOLE MARKER - LEVEL LOCATION - CLEAN UP LOCATION.

WELL P&A'D.

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☐, a general permit ☐ or an (attached) alternative OCD-approved plan ☐.

SIGNATURE: C. Tim Miller TITLE: Vice President - Operations DATE: 23 June 2008

Type or print name: C. Tim Miller E-mail address: tmiller@limerockresources.com Telephone No: (713) 292-9514

For State Use Only


APPROVED BY: [Signature] TITLE: NMOCD

Conditions of Approval (if any): [Signature]

Approved for plugging of well bore only.  
Liability under bond is retained pending receipt  
of C-103 (Subsequent Report of Well Plugging)  
which may be found at OCD Web Page under  
Forms, www.emnrd.state.nm.us/oed.

DATE 6/27/08

# FINAL ABANDONMENT

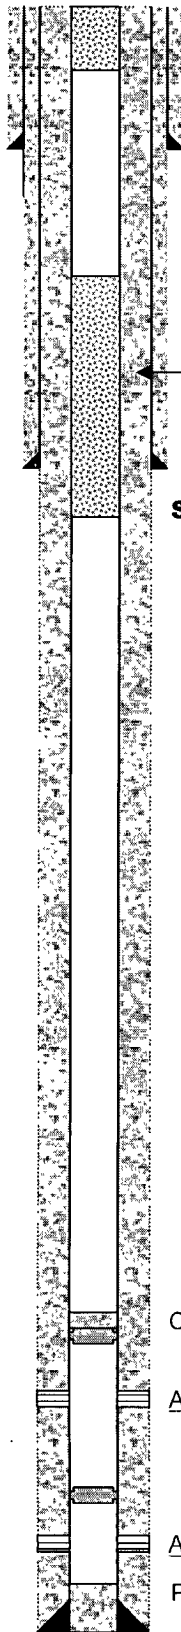

**Spotted cement  
from 90' back to  
surface**

10-3/4", 40.5#, K-55, ST&C Surface Casing @ 923'

Note: Used 1" tbg to circulate cement back to surface.

8-5/8", 24#, K-55, ST&C Casing @ 1,798'

**Spotted 25 sx plug from 1,848' to 1,409' (tagged top of plug)**

**Accepted for record  
NMOCD**

CIBP @ 3,700' w/ 35' cement on top of plug

Abo Perfs: 3,733-34'; 3,738-39'; 3,750'; 3,763-65' & 3,807' (20 - 0.42" DIA holes)

CIBP @ 3,870' w/ 20' cement on top of plug

Abo Perfs: 4,021-23' (5 - 0.42" DIA holes)

PBTD @ 4,182'

4-1/2"; 10.5#; J-55; ST&C Casing @ 4,238'

TD @ 4,250'

**Lime Rock Resources  
Badger Com 3  
Sec 4P-5S-25E  
Chaves County, NM**