District I 1625 N. French Dr., Hobbs, NM 88240 District II 1301 W Grand Avenue, Artesia, NM 88210 District III 1000 Rio Brazos Road, Aztec, NM 87410 District IV 1220 S. St Francis Dr., Santa Fe, NM 87505

## State of New Mexico Energy Minerals and Natural Resources Department Oil Conservation Division 1220 South St. Francis Dr.

Santa Fe, NM 87505

W Form C-144 June 24, 2008

For temporary pits, closed-loop systems, and below-grade tanks, submit to the appropriate NMOCD District Office.

For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

JUL - 1 2008	Pit, Closed-Loop System, Below-Grade Tank, or
OF ADTESIEProp	posed Alternative Method Permit or Closure Plan Application
Uline Hill For	

Type of action:

| Yermit of a pit, closed-loop system, below-grade tank, or proposed alternative method | Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method

Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method					
Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request					
	ability should operations result in pollution of surface water, ground water or the				
	ply with any other applicable governmental authority's rules, regulations or ordinances.				
Operator:Beach Exploration, Inc					
Address:800 N. Marienfeld, Suite 200, Midland, Texas 79701					
Facility or well name:Eastland Queen Unit Well No. 18					
API Number:30-015-03541 OCD Permit N					
U/L or Qtr/Qtr J_ Section l Township _19S Range _2	9ECounty:Eddy				
Center of Proposed Design: Latitude N 32.6866336 Longitude W 104.0245732 NAD: XI 1983					
Surface Owner:  Federal State Private Tribal Trust or Indian	Allotment				
Pit: Subsection F or G of 19.15.17.11 NMAC	☐ Closed-loop System: Subsection H of 19.15.17.11 NMAC				
Temporary: Drilling Workover	☐ Drying Pad ☐ Tanks ☒ Haul-off Bins ☐ Other				
☐ Permanent ☐ Emergency ☐ Cavitation ☐ Steel Pit	☐ Lined ☐ Unlined				
Lined Unlined	Liner type: Thickness mil				
Liner type: Thicknessmil	Other				
Other String-Reinforced	Seams: Welded Factory Other				
Seams: Welded Factory Other	Volume:bblyd³				
Volume:bbl Dimensions: L x W x D	Dimensions: Lengthx Width				
Below-grade tank: Subsection I of 19.15.17.11 NMAC	Fencing: Subsection D of 19.15.17.11 NMAC				
Volume:bbl	Chain link, six feet in height, two strands of barbed wire at top				
Type of fluid:	Four foot height, four strands of barbed wire evenly spaced between one and				
Tank Construction material:	four feet				
☐ Secondary containment with leak detection	Netting: Subsection E of 19.15.17.11 NMAC				
☐ Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off	Screen Netting Other				
☐ Visible sidewalls and liner	☐ Monthly inspections				
☐ Visible sidewalls only	Signs: Subsection C of 19.15 17.11 NMAC				
Other	12'x24', 2' lettering, providing Operator's name, site location, and				
Liner type: Thicknessmil	emergency telephone numbers				
Other	☐ Signed in compliance with 19.15.3.103 NMAC				
Alternative Method:	Administrative Approvals and Exceptions:				
Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration	Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.				
of approval.	Please check a box if one or more of the following is requested, if not leave blank:				
	Administrative approval(s). Requests must be submitted to the				
	appropriate division district or the Santa Fe Environmental Bureau office for				
	consideration of approval.  Exception(s): Requests must be submitted to the Santa Fe				
	Environmental Bureau office for consideration of approval.				

Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying pads or above-grade tanks associated with a closed-loop system.		
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank.  - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells		☐ Yes ☐ No
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playar lake (measured from the ordinary high-water mark).  - Topographic map; Visual inspection (certification) of the proposed site	1	Yes No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.  (Applies to temporary, emergency, or cavitation pits and below-grade tanks)  - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image		☐ Yes ☐ No ☐ NA
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.  (Applies to permanent pits)  - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image		Yes No
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	1.	☐ Yes ☐ No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended.  - Written confirmation or verification from the municipality; Written approval obtained from the municipality		☐ Yes ☐ No
Within 500 feet of a wetland.  - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site		☐ Yes ☐ No
Within the area overlying a subsurface mine.  - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division		Yes No
Within an unstable area.  - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map		☐ Yes ☐ No
Within a 100-year floodplain FEMA map		Yes No
Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17  Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the attached.  Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMA Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15. Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC	e doc AC	uments are
☐ Previously Approved Design (attach copy of design) API Number: or Permit Number:		
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC  Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the attached.  Geologic and Hydrogeologic Data (required for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B Siting Criteria Compliance Demonstrations (required for on-site closure) - based upon the appropriate requirements of 19.15.17  Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC  Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC  Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC	3 of 1	9.15.17.9
Previously Approved Design (attach copy of design) API Number:		


Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC		
Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that	the de	ocuments are
### Author of Paragraph (1) of Subsection B of 19.15.17.9 NMAC    Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC    Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC    Climatological Factors Assessment    Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC    Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC    Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC    Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC    Quality Control/Quality Assurance Construction and Installation Plan    Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC    Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC    Nuisance or Hazardous Odors, including H₂S, Prevention Plan    Emergency Response Plan    Oil Field Waste Stream Characterization    Monitoring and Inspection Plan    Erosion Control Plan    Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC		
Proposed Closure: 19.15.17.13 NMAC		
Type: Drilling Workover Emergency Cavitation Permanent Pit Below-grade Tank Closed-loop Syst	em [	Alternative
Proposed Closure Method:  Waste Excavation and Removal  Waste Removal (Closed-loop systems only)  On-site Closure Method (Only for temporary pits and closed-loop systems)  In-place Burial On-site Trench Burial  Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau f	or cor	nsideration)
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC		
Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval fight the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Burea office for consideration of approval. Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17. NMAC for guidance.	u [	
Ground water is less than 50 feet below the bottom of the buried waste.  - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells		☐ Yes ☐ No ☐ NA
Ground water is between 50 and 100 feet below the bottom of the buried waste  - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells		☐ Yes ☐ No ☐ NA
Ground water is more than 100 feet below the bottom of the buried waste.  - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells		☐ Yes ☐ No ☐ NA
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or play lake (measured from the ordinary high-water mark).  - Topographic map; Visual inspection (certification) of the proposed site	a	Yes No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.  - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image		☐ Yes ☐ No
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial applicatio  NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site	n.	Yes No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended.  - Written confirmation or verification from the municipality; Written approval obtained from the municipality		Yes No
Within 500 feet of a wetland US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site		☐ Yes ☐ No
Within the area overlying a subsurface mine.  - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	-	☐ Yes ☐ No
<ul> <li>Within an unstable area.</li> <li>Engineering measures incorporated into the design; NM Bureau of Geology &amp; Mineral Resources; USGS; NM Geological Society; Topographic map</li> </ul>		☐ Yes ☐ No
Within a 100-year floodplain FEMA map		☐ Yes ☐ No

closure plan. Please indicate, by a check mark in the box, that the  Protocols and Procedures - based upon the appropriate require  Confirmation Sampling Plan (if applicable) - based upon the appropriate require  Disposal Facility Name and Permit Number (for liquids, drilling Soil Backfill and Cover Design Specifications - based upon the Re-vegetation Plan - based upon the appropriate requirements  Site Reclamation Plan - based upon the appropriate requirements	ements of 19.15.17.13 NMAC appropriate requirements of Subsection F of 19.15.17.13 NMAC ing fluids and drill cuttings) ne appropriate requirements of Subsection H of 19.15.17.13 NMAC s of Subsection I of 19.15.17.13 NMAC ents of Subsection G of 19.15.17.13 NMAC
or facilities for the disposal of liquids, drilling fluids and drill cutti	
Disposal Facility Name:Controlled Recovery, Inc	
	ns: Each of the following items must be attached to the closure plan. Please indicate,
Waste Material Sampling Plan - based upon the appropriate re	equirements of Subsection F of 19.15.17.13 NMAC ed upon the appropriate requirements of 19.15.17.11 NMAC ements of 19.15.17.13 NMAC appropriate requirements of Subsection F of 19.15.17.13 NMAC equirements of Subsection F of 19.15.17.13 NMAC ing fluids and drill cuttings or in case on-site closure standards cannot be achieved) of Subsection H of 19.15.17.13 NMAC of Subsection I of 19.15.17.13 NMAC
Onesates Analisation Costifications	
Operator Application Certification:	
I hereby certify that the information submitted with this application	is true, accurate and complete to the best of my knowledge and belief.
Name (Print):Jack M. Rose	Title:Engineer
Signature: Jan More	Date: June 30 <sup>th</sup> , 2008
e-mail address/bmartin@beachexp.com	Telephone:432/683-6226
OCD Approval: Permit Application (including closure plan)	Closure Plan (only)
OCD Representative Signature:	
OCD Representative Signature:	Approval Date: <u>070308</u>
ALL FITTS	Laco On Amelia
Title:	OCD Permit Number: 020820
Closure Report (required within 60 days of closure completion):	Subsection K of 19.15.17.13 NMAC  Closure Completion Date:
Closure Method:  ☐ Waste Excavation and Removal ☐ On-Site Closure Method ☐ If different from approved plan, please explain.	Alternative Closure Method
Closure Report Attachment Checklist: Instructions: Each of the	following items must be attached to the closure report. Please indicate, by a check
mark in the box, that the documents are attached.  Proof of Closure Notice Proof of Deed Notice (if applicable) Plot Plan Confirmation Sampling Analytical Results Waste Material Sampling Analytical Results Disposal Facility Name and Permit Number Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique Site Reclamation (Photo Documentation)	, some manual of the control of the
	Landa de la constante de la co
On-site Closure Location: Latitude	LongitudeNAD: ☐1927 ☐ 1983
On-site Closure Location: Latitude	Longitude NAD:
On-site Closure Location: Latitude  Operator Closure Certification:  I hereby certify that the information and attachments submitted with	Longitude NAD:1927 1983  this closure report is true, accurate and complete to the best of my knowledge and sure requirements and conditions specified in the approved closure plan.
On-site Closure Location: Latitude  Operator Closure Certification:  I hereby certify that the information and attachments submitted with	this closure report is true, accurate and complete to the best of my knowledge and sure requirements and conditions specified in the approved closure plan.
On-site Closure Location: Latitude  Operator Closure Certification:  I hereby certify that the information and attachments submitted with belief. I also certify that the closure complies with all applicable closure.	this closure report is true, accurate and complete to the best of my knowledge and sure requirements and conditions specified in the approved closure plan.  Title:

## BEACH EXPLORATION, INC.

## Re-entry of P&A well to convert to Injection

Pulling Unit and Reverse Unit
Closed Loop System Design, Operation and Closure Plan

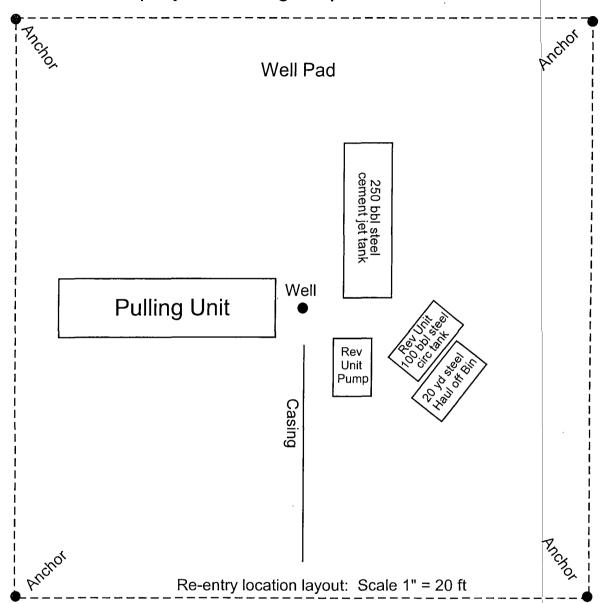

The closed loop system will be operated in a manner to contain all drilling fluids and solids in steel tanks to prevent contamination.

Solids will be removed from the circulated fluid with a wire mesh screen at the reverse unit circulating tank and diverted into the 20 yd haul-off bin. When finished solids will be hauled to an approved disposal site in the haul-off bin and liquids in the circulating tank will be pulled off and trucked to an approved disposal site.

The 250 bbl steel jet tank will be used as backup storage to the reverse unit circulating steel pit during the clean out operations. Hole volume is approx 150 bbl.

When casing is run and cemented the 250 bbl steel jet tank will be used to circulate cement from the well. The cement will be sugared to retard it, pulled off the tank and trucked to an approved disposal site. Equipment will be removed from the well site.