State of New Mexico Energy Minerals and Natural Resources Department

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505



Form C-144 July 21, 2008

For temporary pits, closed-loop systems, and below-grade tanks, submit to the appropriate NMOCD District Office.

For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

Pit, Closed-Loop System, Below-Grade Tank, or Proposed Alternative Method Permit or Closure Plan Application Type of action: Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method Modification to an existing permit Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system, below-grade tank, or proposed alternative method
Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request
Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.
1. Operator: _MEWBOURNE OIL COMPANY OGRID #: _14744 Address: PO BOX 5270 HOBBS NM 88241
Facility or well name: _PACU 14 FEDERAL COM #1
API Number: _30-015-36416OCD Permit Number:
U/L or Qtr/Qtr D Section _14 Township 17S Range 29E County: Eddy
Center of Proposed Design: Latitude N 32° 50′ 22" Longitude W 104° 03′ 01" NAD: 🛛 1927 🗌 1983
Surface Owner: X Federal State Private Tribal Trust or Indian Allotment
☑ Pit: Subsection F or G of 19.15.17.11 NMAC Temporary: ☑ Drilling ☒ Workover ☐ Permanent ☐ Emergency ☐ Cavitation ☐ P&A ☒ Lined ☐ Unlined Liner type: Thickness _ 20mil ☒ LLDPE ☐ HDPE ☐ PVC ☐ Other ☒ String-Reinforced Liner Seams: ☐ Welded ☒ Factory ☐ Other Volume: 14400bbl Dimensions: L _ 120 x W _ 100 x D _ 8
Closed-loop System: Subsection H of 19.15.17.11 NMAC Type of Operation: P&A Drilling a new well Workover or Drilling (Applies to activities which require prior approval of a permit or notice of intent) Drying Pad Above Ground Steel Tanks Haul-off Bins Other Lined Unlined Liner type: Thickness mil LLDPE HDPE PVC Other Liner Seams: Welded Factory Other
4.
Below-grade tank: Subsection I of 19.15.17.11 NMAC Volume:
5. Alternative Method: Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks)			
☐ Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital,			
institution or church) X Four foot height, four strands of barbed wire evenly spaced between one and four feet			
☐ Alternate. Please specify			
7.			
Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)			
☐ Screen ☐ Netting ☐ Other ☐ Monthly inspections (If netting or screening is not physically feasible)			
interior inspections (it neutring or detectining to not physically readility)			
Signs: Subsection C of 19.15.17.11 NMAC			
12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers			
Signed in compliance with 19.15.3.103 NMAC			
9. Administrative Approvals and Exceptions:			
Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.			
Please check a box if one or more of the following is requested, if not leave blank: Administrative approval(s): Requests must be submitted to the appropriate division district or the Santa Fe Environmental Bureau of the Santa Fe En	office for		
consideration of approval. Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.			
10.			
Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptance.	rtable source		
material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appro-	priate district		
office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of a Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to dryi	<i>pproval</i> . ing pads or		
above-grade tanks associated with a closed-loop system.	□ V□ N-		
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes X No		
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).	☐ Yes X No		
- Topographic map; Visual inspection (certification) of the proposed site			
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to temporary, emergency, or cavitation pits and below-grade tanks)	☐ Yes X No ☐ NA		
- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image			
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to permanent pits)	☐ Yes ☐ No X NA		
- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	<u> </u>		
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes X No		
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance	☐ Yes X No		
adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality			
Within 500 feet of a wetland.			
- US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes X No		
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes 🏻 No		
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	Yes X No		
Within a 100-year floodplain FEMA map	☐ Yes ☒ No		

Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.					
Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC					
X Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC					
Previously Approved Design (attach copy of design) API Number: or Permit Number:					
12. Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC					
Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.					
Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9 Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC					
and 19.15.17.13 NMAC Previously Approved Design (attach copy of design) API Number:					
Previously Approved Operating and Maintenance Plan API Number: (Applies only to closed-loop system that use					
above ground steel tanks or haul-off bins and propose to implement waste removal for closure)					
Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC					
Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.					
 ☐ Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC ☐ Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC 					
☐ Climatological Factors Assessment					
☐ Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC ☐ Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC					
☐ Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC					
☐ Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC ☐ Quality Control/Quality Assurance Construction and Installation Plan					
Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC					
☐ Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC ☐ Nuisance or Hazardous Odors, including H ₂ S, Prevention Plan					
☐ Emergency Response Plan ☐ Oil Field Waste Stream Characterization					
Monitoring and Inspection Plan					
☐ Erosion Control Plan ☐ Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC					
14.					
Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.					
Type: X Drilling X Workover					
Proposed Closure Method: Waste Excavation and Removal					
 Waste Removal (Closed-loop systems only) On-site Closure Method (Only for temporary pits and closed-loop systems) 					
In-place Burial On-site Trench Burial					
Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)					
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached.					
Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC					
Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings)					
Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC Site Perlametric Plan - based upon the appropriate requirements of Subsection C of 19.15.17.13 NMAC					
☐ Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC					

Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Ste Instructions: Please indentify the facility or facilities for the disposal of liquids, drill facilities are required.				
·	oosal Facility Permit Number:R9166			
	· ·			
Will any of the proposed closed-loop system operations and associated activities occur Yes (If yes, please provide the information below) No				
Required for impacted areas which will not be used for future service and operations: Soil Backfill and Cover Design Specifications based upon the appropriate requirements of Subsection I of Site Reclamation Plan - based upon the appropriate requirements of Subsection I	19.15.17.13 NMAC	C		
17. Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the clos provided below. Requests regarding changes to certain siting criteria may require acconsidered an exception which must be submitted to the Santa Fe Environmental Budemonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for g	ministrative approval from the appropriate disti reau office for consideration of approval. Justi	rict office or may be		
Ground water is less than 50 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data ob	ained from nearby wells	☐ Yes X No ☐ NA		
Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data ob	tained from nearby wells	☐ Yes X No ☐ NA		
Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data ob	rained from nearby wells	XYes ☐ No ☐ NA		
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significal lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	ant watercourse or lakebed, sinkhole, or playa	☐ Yes X No		
Within 300 feet from a permanent residence, school, hospital, institution, or church in e - Visual inspection (certification) of the proposed site; Aerial photo; Satellite im-		☐ Yes X No		
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site				
Within incorporated municipal boundaries or within a defined municipal fresh water wadopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval of	·	☐ Yes ☒ No		
Within 500 feet of a wetland US Fish and Wildlife Wetland Identification map; Topographic map; Visual in	spection (certification) of the proposed site	☐ Yes X No		
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and	Mineral Division	☐ Yes X No		
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Society; Topographic map	Mineral Resources; USGS; NM Geological	☐ Yes ☒ No		
Within a 100-year floodplain. - FEMA map		☐ Yes X No		
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the for	lowing items must be attached to the closure pla	an. Please indicate,		
by a check mark in the box, that the documents are attached. Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of 19.15.17.11 NMAC Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.11 NMAC Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Waste Material Sampling Plan - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cannot be achieved) Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC				

19. Operator Application Certification:				
I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and belief.				
Name (Print): Charles Martin	Title: _Engineer			
Signature: Charles L. Mantes	Date: _07/29/08			
e-mail address:cmartin@mewbourne.com	Telephone: 575-393-5905			
OCD Approval: Permit Application (including closure plan) [Closure plan]	are Plan (only) OCD Conditions (see attachment)			
OCD Representative Signature	Approval Date: 8-7-08			
OCD Approval: A Permit Application (including closure plan) [Closure Description of the Control	GCD Permit Number: 0208262			
Closure Report (required within 60 days of closure completion): Subsection K of 19.15.17.13 NMAC Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting the closure report. The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not complete this section of the form until an approved closure plan has been obtained and the closure activities have been completed.				
	Closure Completion Date:			
22. Closure Method: Waste Excavation and Removal ☐ On-Site Closure Method ☐ Al If different from approved plan, please explain.	ternative Closure Method Waste Removal (Closed-loop systems only)			
23. Closure Report Regarding Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only: Instructions: Please indentify the facility or facilities for where the liquids, drilling fluids and drill cuttings were disposed. Use attachment if more than two facilities were utilized.				
Disposal Facility Name:	Disposal Facility Permit Number:			
Disposal Facility Name:	Disposal Facility Permit Number:			
Were the closed-loop system operations and associated activities performed on or in areas that will not be used for future service and operations? Yes (If yes, please demonstrate compliance to the items below) No				
Required for impacted areas which will not be used for future service and operations: Site Reclamation (Photo Documentation) Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique				
24. Closure Report Attachment Checklist: Instructions: Each of the following	ng items must be attached to the closure report. Please indicate, by a check			
mark in the box, that the documents are attached. Proof of Closure Notice (surface owner and division) Proof of Deed Notice (required for on-site closure) Plot Plan (for on-site closures and temporary pits) Confirmation Sampling Analytical Results (if applicable) Waste Material Sampling Analytical Results (required for on-site closuding Disposal Facility Name and Permit Number Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique Site Reclamation (Photo Documentation)				
	ongitude NAD: []1927 [] 1983			
Operator Closure Certification: I hereby certify that the information and attachments submitted with this closure report is true, accurate and complete to the best of my knowledge and belief. I also certify that the closure complies with all applicable closure requirements and conditions specified in the approved closure plan.				
Name (Print):	Title:			
Signature: Date:				
e-mail address:	Telephone:			

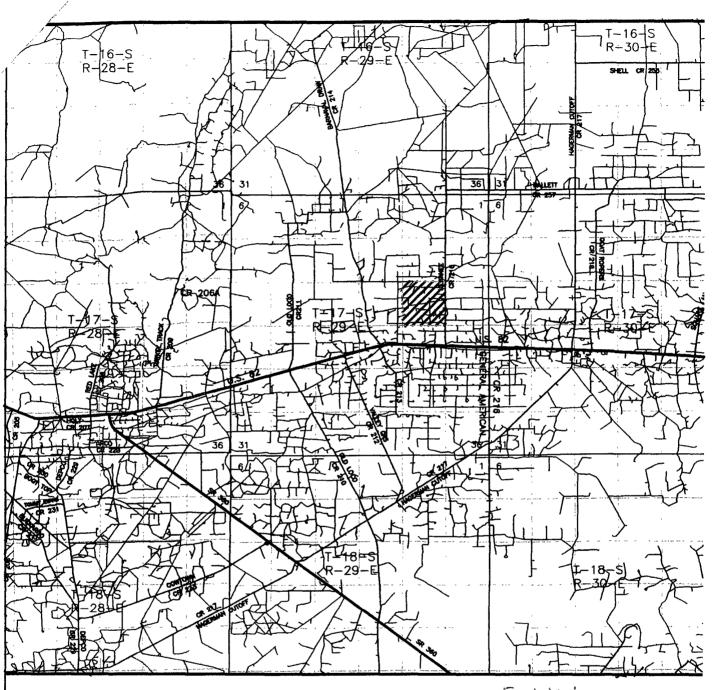


Exhibit 3

PACU "14" FEDERAL COM #1
Located 800' FNL and 990' FWL
Section 14, Township 17 South, Range 29 East,
N.M.P.M., Eddy County, New Mexico.



P.O. Box 1786 1120 N. West County Rd. Hobbs, New Mexico 88241 (505) 393-7316 - Office (505) 392-3074 - Fax basinsurveys.com


W.O. Number: 19686 JMS

Survey Date: 05-07-2008

Scale: 1" = 2 MILES

Date: 05-09-2006

MEWBOURNE OIL CO.

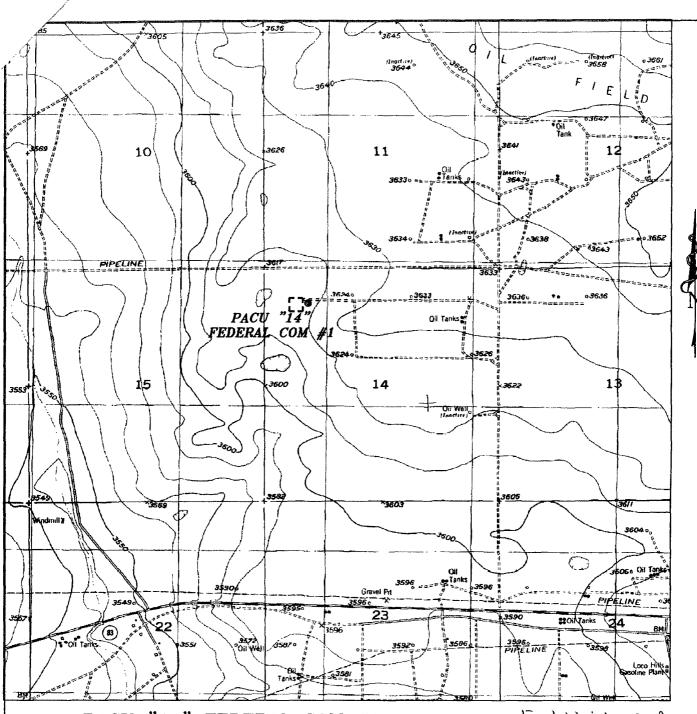


PACU "14" FEDERAL COM #1 Exhibit 3A Located 800' FNL and 990' FWL Section 14, Township 17 South, Range 29 East, N.M.P.M., Eddy County, New Mexico.



P.O. Box 1786 1120 N. West County Rd. Hobbs, New Mexico 88241 (505) 393-7316 - Office (505) 392-3074 - Fax basinsurveys.com


THE CONTRACTOR	w o	Number	19686 JM	S
TO STATE COMME	Surv	ey Date	05-07-2	008
Secretary Sec.	Scale	e: 1" = 2	000'	
1	Date	05-08-	-2008	Konthonio II in the land and common and despe

MEWBOURNE OIL CO.

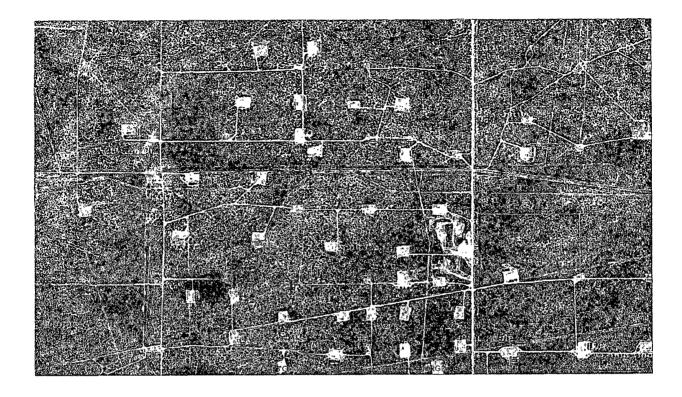

Page 1 of 1

Temporary Pit Design and Construction

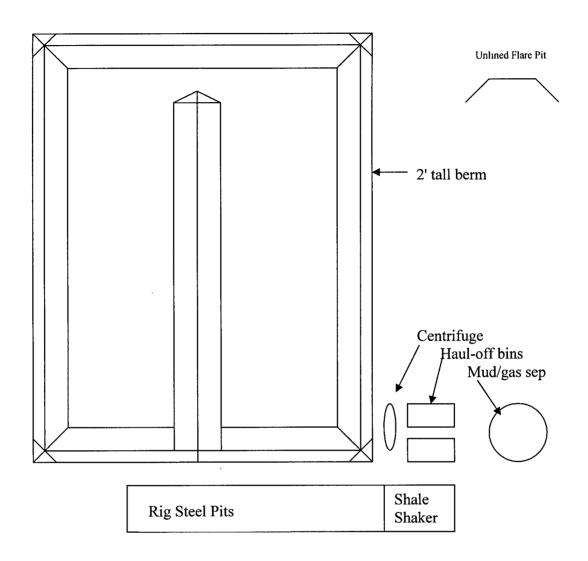

Pit Dimensions:

Peak Width: 100'. Floor Width: 76' Peak Length: 120' Floor Length: 96'

Floor is 6' below GL.

Perimeter berm is 2' above GL. All walls are built with 2:1 slope.

Pit is fenced on 3 sides with barbed wire before & during drilling operations. Fourth side will be installed after drilling operations are completed.

Pit is lined with 20 mil string reinforced LLDPE installed with 18" anchor trench.


Approximate volume including 2' freeboard: 14,400 bbl.

Temporary Pit Operating and Maintenance and Closure Plan

Temporary pit will be built in a single horse shoe as shown in the attached drawing. The pit will only be utilized for "fresh" water-based fluids. Brine water fluids will be hauled off location and disposed of in an approved facility. Drilling cuttings in the high chloride sections of the well will collect in haul-off bins and will be disposed at either Lea Land Farm or CRI. Drilling cuttings in the low chloride sections of the well will collect in the temporary pit. The temporary pit will be dewatered and solids will be buried in a deep trench on site.


Contingency-

If the temporary pit does not meet the required specifications to bury on site, material will be disposed of at Lea Land Farm or CRI.

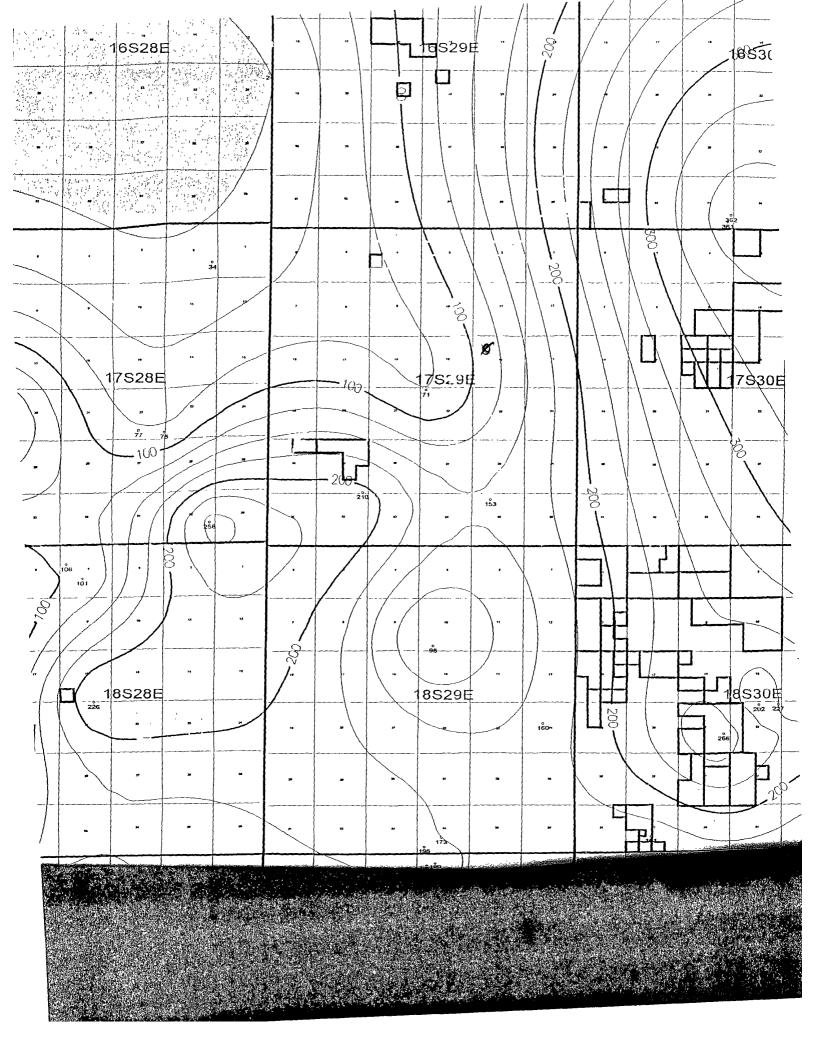

On-Site Closure Plan

- Siting Criteria: See attachments.
- Proof of Surface Owner Notice: See attached letter that has been sent to land owner.
- Construction/Design Plan of Burial Trench: See attachment.
- **Burial Trench:** In compliance with 19.15.17.13 NMAC, material form temporary pit will be stiffened with a maximum 3:1 ratio and placed in a lined 20mil burial trench with approximate dimensions of 150x40x20. A 20mil lid will be placed on top of the burial cell to seal in the impacted material. Upon excavation all applicable soil testing will be performed pursuant to Pit Rule 17 to verify the limits set by the NMOCD have been obtained. A copy of the analytical data will be attached to the Final Report.
- Sampling Plan: In compliance with Subsection F of 19.15.17.13 NMAC a five point composite sample will be taken from the floor of the excavation and the burial contents.
- Soil Cover Design: In compliance with Subsection H of 19.15.17.13 NMAC three foot of native material will be placed over the burial trench and the excavated pit area with one foot of top soil to ensure re-vegetation.
- **Re-vegetation Plan:** In compliance with Subsection I of 19.15.17.13 NMAC the area will be re-seeded with native vegetation.
- **Site Reclamation Plan:** In compliance with Subsection I of 19.15.17.13 NMAC the impacted and disturbed area will be re-contoured to surrounding terrain.
- Marker: Mewbourne Oil Company requests an exception to the placement of the permanent maker. It is of our opinion that the permanent marker will be better served if it is placed at the corner of the burial cell in native undisturbed soil rather than in the center of the burial area. In the area of the burial cell the material is not as compact and we feel could pose future problems with the stability of the permanent marker. The permanent marker will have all required information permanently listed on it.
- **Deed:** In compliance with 19.15.17.13 NMAC a deed will be filed with the county clerk and an approved copy will be attached to the final report.

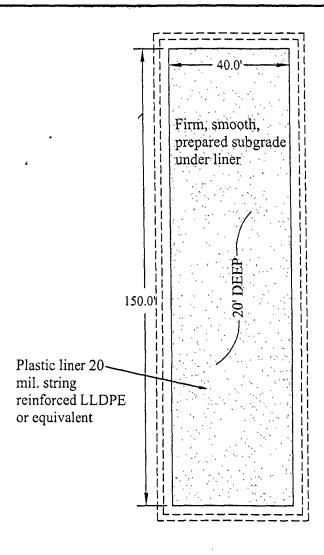

Site Overhead View



Date: 07/22/2008

Scale: Not To Scale

Drawn By: SJA

Mewbourne Oil Company
Bradley 6 Federal 1
Eddy County, New Mexico
Pit Liner Site Plain

On the $\frac{9}{14}$ day of $\underline{M_{Ry}}$, $\underline{2008}$ Mewbourne Oil Co. visually inspected the \underline{Pach} 14 Federal Com*1 location in Unit Letter \underline{D} of Sec. $\underline{14}$, T. $\underline{17}$ S, R. $\underline{29}$ E, of \underline{Eddy} County, NM with the API # $\underline{30 - 015 - 364/6}$.

This is to certify that upon visual inspection of the above mentioned location there are no permanent residences, schools, hospitals, institutions or churches within 300 feet. The location is not within 500 feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, nor within 1000 horizontal feet of any other fresh water well or spring, nor within 500 feet of a wetland, nor within 300 feet of a continuously flowing water course, nor within 200 feet of any other significant watercourse or lakebed, sinkhole or playa lake (measured from the ordinary high-water mark).

Signature: Charles J. Meetin

Date: 7-30-08

CONSTRUCTION

A. NOTIFICATION

The BLM shall administer compliance and monitor construction of the access road and well pad. Notify the Carlsbad Field Office at (575) 234-5972 at least 3 working days prior to commencing construction of the access road and/or well pad.

When construction operations are being conducted on this well, the operator shall have the approved APD and Conditions of Approval (COA) on the well site and they shall be made available upon request by the Authorized Officer.

B. TOPSOIL

The operator shall stockpile the topsoil of the well pad. The topsoil to be stripped is approximately 6 inches in depth. The topsoil shall not be used to backfill the reserve pit and will be used for interim and final reclamation.

C. RESERVE PITS

The reserve pit shall be constructed and closed in accordance with the NMOCD rules.

The reserve pit shall be constructed 100' X 100' on the East side of the well pad.

The reserve pit shall be constructed, so that upon completion of drilling operations, the dried pit contents shall be buried a minimum depth of three feet below ground level. Should the pit content level not meet the three foot minimum depth requirement, the excess contents shall be removed until the required minimum depth of three feet below ground level has been met. The operator shall properly dispose of the excess contents at an authorized disposal site.

The reserve pit shall be constructed and maintained so that runoff water from outside the location is not allowed to enter the pit. The berms surrounding the entire perimeter of the pit shall extend a minimum of two (2) feet above ground level. At no time will standing fluids in the pit be allowed to rise above ground level.

The reserve pit shall be fenced on three (3) sides during drilling operations. The fourth side shall be fenced immediately upon rig release.

D. FEDERAL MINERAL MATERIALS PIT

If the operator elects to surface the access road and/or well pad, mineral materials extracted during construction of the reserve pit may be used for surfacing the well pad and access road and other facilities on the lease.