APT 30-015-36941

DEC 19 2008

District 1

1625 N. French Dr., Hobbs, NM 88240

District II

1301 W. Grand Avenue, Artesia, NM 88210

District III

1000 Rio Brazos Rd., Aztec, NM 87410

District IV

1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION

OCD-ARTESIA Form C-102

Revised October 12, 2005 Submit to Appropriate District Office

State Lease- 4 Copies

Fee Lease-3 Copies


1220 South St. Francis Dr. Santa Fe, NM 87505

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT API Number Pool Code Pool Name 94070 WC; Moriow Gas Property Name Well Number Property Code HOYT 3 STATE COM 2 Operator Name OGRID No. Elevation 7377 EOG RESOURCES, INC. *3193.0*'

Surface Location Range Lot Idn Feet from the North/South line Feet from the UL or lot no. Section Township East/West line County 25 SOUTH 27 EAST, N.M.P.M. A 3 660 **NORTH EDDY** 660 **EAST** Bottom Hole Location If Different From Surface UL or lot no. Section Township Lot Idn Feet from the North/South line Feet from the East/West line County **Dedicated Acres** Joint or Infill Consolidation Code Order No. 316.90

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

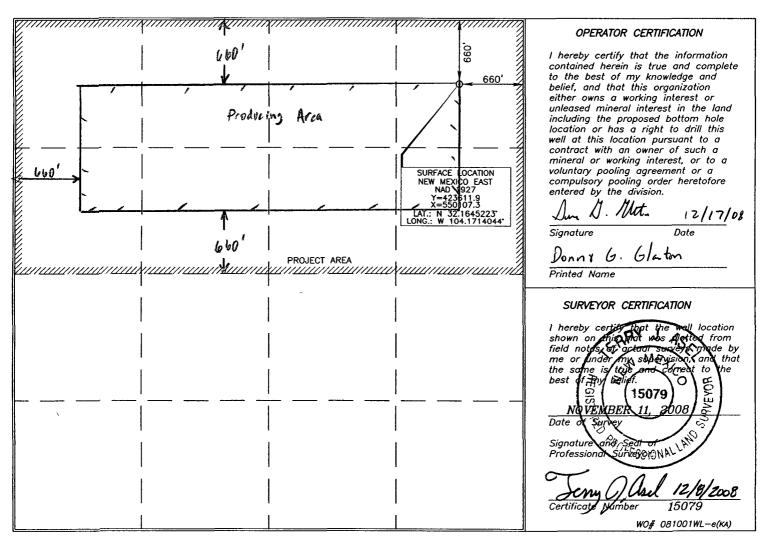

Permit Information:

Well Name: Hoyt 3 State Com #2

Location:

SL

660' FNL & 660' FEL, Section 3, T-25-S, R-27-E, Eddy Co., N.M.

BHL

Same

Casing Program:

Casing	Setting Depth	Hole Size	Casing Size	Casing Weight	Casing Grade	Desired TOC
Surface	450'	17-1/2"	13-3/8"	48#	H-40	Surface
1 st Intermediate	2,300'	12-1/4"	9-5/8"	40#	J-55	Surface
2 nd Intermediate	9,500'	8-3/4"	7"	26#	HCP-110	1,900'
Production	12,600'	6-1/8"	4-1/2"	11.6#	HCP-110	9,300'
Liner						TOL

Cement Program:

Depth	No.	Slurries:
	Sacks	
450'	500	Premium Plus C + 0.005 pps Static Free + 2% CaCl2 + 0.25 pps CelloFlake
		+ 0.005 gps FP-6L
2,300'	400	Lead: 50:50 Poz C + 0.005 pps Static Free + 5% NaCl + 0.25 pps
		CelloFlake + 5 pps LCM-1 + 0.005 gps FP-6L + 10% Bentonite
	200	Tail: Premium Plus C + 0.005 pps Static Free + 2% CaCl2 + 0.25 pps
		CelloFlake + 0.005 gps FP-6L
9,500' 175 Lead: 35:65 Poz H + 0.005 pps Static		Lead: 35:65 Poz H + 0.005 pps Static Free + 5% NaCl + 0.125 pps
Stage 1		CelloFlake + 0.1% FL-52A + 0.005 gps FP-6L + 6% Bentonite + 0.1%
		ASA-301 + 0.1% SMS + 1% FL-62A
	465	Tail: 50:50 Poz H + 2% Bentonite + 0.005 gps FP-6L + 0.005 pps Static
		Free + 5% NaCl + 0.1% R-3 + 0.2% CD-32 + 0.3% FL-52A
Stage 2	435	Lead: 50:50 Poz C + 0.005 pps Static Free + 5% NaCl + 0.25 pps
		CelloFlake + 5 pps LCM-1 + 0.005 gps FP-6L + 10% Bentonite
	100	Tail: Class H + 0.005 pps Static Free + 0.005 gps FP-6L
12,600	410	Premium Plus H + 0.005 gps FP-6L + 0.4% BA-10A + 0.005 pps Static
		Free + 0.4% R-3 + 0.3% CD-32 + 1% FL-62 + 0.1% ASA-301 + 0.1% SMS

Mud Program:

Depth	Type	Weight (ppg)	Viscosity	Water Loss
0 – 450'	Fresh - Gel	8.6-8.8	28-34	N/c
450' – 2,300'	Brine	10.0-10.2	28-34	N/c
2,300' – 9,500'	Fresh Water	8.4 - 8.6	28-34	N/c
9,500' – 11,100'	Cut Brine	8.8-9.6	28-34	N/c
11,100' - 12,600'	Cut Brine/	8.8-10.6	30-40	10-15
	Polymer			



EOG Resources, Inc. P.O. Box 2267 Midland, TX 79702 (432) 686-3600

December 15, 2008

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

To Whom It May Concern:

I am writing to request a waiver for the inclusion of an H₂S Contingency Plan for the Hoyt 3 State Com #2. The current plan is to complete this well in the Atoka/ Morrow, which is sweet, and I do not anticipate encountering any H₂S bearing formations during drilling operations.

Sincerely.

Drilling Engineer