## FEB -6 2009

Form 3160-5 (February 2005)

# UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

FORM APPROVED OMB No 1004-0137 Expires: March 31, 2007.

APPROVED
No 1004-0137

BUREAU OF LAND MANAGEMENT					5. Lease Serial No. NMNM017095	* -	
SUNDRY NOTICES AND REPORTS ON WELLS					6. If Indian, Allottee or Tribe Name		
	form for proposals to Use Form 3160-3 (Al				•		
SUBMIT IN TRIPLICATE – Other instructions on page 2.					7. If Unit of CA/Agre	ement, Name and/or No.	
1. Type of Well		`					
☐ Oil Well ☐ Gas Well ☑ Other WIW					8. Well Name and No. GOVERNMENT D 2		
2. Name of Operator CHESAPEAKE OPERATING, INC. ATTN: LINDA GO			OO -		9. API Well No. 30-015-21233		
3a. Address P. O. BOX 18496 OKLAHOMA CITY, OK 73154-0496  3b. Pho 405-			(include area cod 275		10. Field and Pool or Exploratory Area FENTON NW		
4. Location of Well (Footage, Sec., T.,R.,M., or Survey Description)					11. Country or Parish, State		
1980 FNL 660 FWL, SWNW, SECTION 12-21S-27E					EDDY CO., NM		
. 12. CHEC	CK THE APPROPRIATE BOX	X(ES) TO IND	ICATE NATURE	OF NOTICE	E, REPORT OR OTH	ER DATA	
TYPE OF SUBMISSION TYPE OF ACT					ON	1	
✓ Notice of Intent	Acidize Alter Casing	Deepen Fracture Treat			Production (Start/Resume)		
Subsequent Report	Casing Repair	☐ New	New Construction		nplete .	Other	
Sassaquein respert	Change Plans	<b>✓</b> Plug a	Plug and Abandon		Temporarily Abandon		
Final Abandonment Notice	Abandonment Notice Convert to Injection		Back	Water Disposal			
Attach the Bond under which the v following completion of the involv testing has been completed. Final determined that the site is ready for ATTN: JIM AMOS (BLM)	red operations. If the operation Abandonment Notices must be	n results in a m	ultiple completion	n or recomple	etion in a new interval	, a Form 3160-4 must be filed once	
CHESAPEAKE, RESPECTFULLY,	REQUESTS, VERBAL PER	RMISSION TO	PLUG AND AB	BANDON TI	IIS WELL PER THE	FOLLOWING PROCEDURE.	
1. MIRU PU. NDWH/NUBOP. 2. RIH W/OPEN ENDED TBG TO 3 3. PULL TBG UP TO 810' AND PUN 4. PULL TBG UP TO 60'. FILL CAS 5. RD AND MOVE OFF. INSTALL I	MP SET 100' DV TOOL CE SING BACK TO SURFACE	MENT PLUG. WITH CEME	・ <b>ピェイデ @</b> NT. POH W/TB(	810 S G. TOP OF	F CASING WITH C	oo' in/out. EMENT. Pert @ 60' Buce ze in/out To Surt.	
(CHK PN 890961)	, , <b>«</b> ; *	, ,			•		
	EE ATTACHED			` ,	•		
CONDITIONS OF APPROVAL							
14. Thousand soutification the Commonly is t	no and second						
<ol> <li>I hereby certify that the foregoing is true and correct.</li> <li>Name (Printed/Typed)</li> <li>LINDA GOOD</li> </ol>			Title SENIOR	OR REGULATORY COMPLIANCE SPECIALIST			
Signature Linda Good Date 02/03/2009							
THIS SPACE FOR FEDERAL OR STATE OFFICE USE							
Approved by	Part -		Title SZ	<i>-</i> Δς		Date 2-3-09	
Conditions of approval, if any, are attached that the applicant holds legal or equitable to entitle the applicant to conduct operations	itle to those rights in the subject		ertify	Parls	bad Fie	Date 2-3-09	
,							

Title 8 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

#### **Proposal for Workover**



#### GOVERNMENT D 2.

Field:

**FENTON DELAWARE** 

County: State:

EDDY **NEW MEXICO** 

Location:


Elevation: GL 3,224.00

KB Height: 18.00

KB 3,242.00

SEC 12, 21S-27E, 1980' FNL & 660' FWL

Spud Date: 8/10/1974 Initial Compl. Date:
API #: 3001521233
CHK Propterty #: 890961
1st Prod Date:
PBTD: Original Hole - 29950 TD: 11,800.0

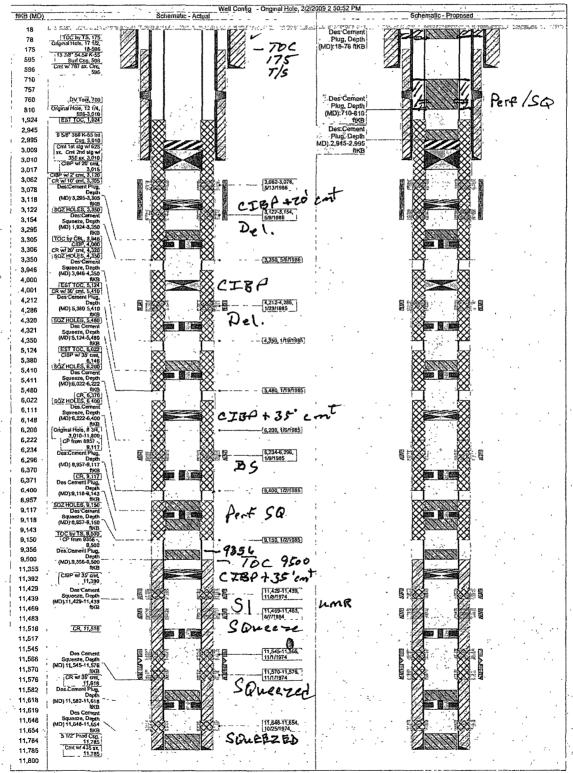

### BUREAU OF LAND MANAGEMENT Carlsbad Field Office 620 East Greene Street Carlsbad, New Mexico 88220 575-234-5972

#### Permanent Abandonment of Federal Wells Conditions of Approval

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. Plugging operations shall commence within <u>ninety (90)</u> days from the approval date of this Notice of Intent to Abandon.

If you are unable to plug the well by the 90<sup>th</sup> day provide this office, prior to the 90<sup>th</sup> day, with the reason for not meeting the deadline and a date when we can expect the well to be plugged. Failure to do so will result in enforcement action.

- 2. <u>Notification:</u> Contact the appropriate BLM office at least 24 hours prior to the commencing of any plugging operations. For wells in Chaves and Roosevelt County, call 575-627-0272; Eddy County, call 575-361-2822; Lea County, call 575-393-3612.
- 3. <u>Blowout Preventers</u>: A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The minimum BOP requirement is a 2M system for a well not deeper than 9,090 feet; a 3M system for a well not deeper than 13,636 feet; and a 5M system for a well not deeper than 22,727 feet.
- 4. <u>Mud Requirement:</u> Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at the rate of 25 sacks (50 pounds each) of gel per 100 barrels of water. Minimum nine (9) pounds per gallon.
- 5. <u>Cement Requirement</u>: Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and are not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. In lieu of a cement plug in a cased hole, a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 25 sacks of cement. If a bailer is used to cap this plug, 35 feet of cement shall be sufficient.

Unless otherwise specified in the approved procedure, the cement plug shall consist of either Neat Class "C", for up to 7,500 feet of depth or Neat Class "H", for deeper than 7,500 feet plugs.

- 6. <u>Dry Hole Marker</u>: All casing shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). The well bore shall then be capped with a 4-inch pipe, 10-feet in length, 4 feet above ground and embedded in cement. The following information shall be permanently inscribed on the dry hole marker: well name and number, name of the operator, lease serial number, surveyed location (quarter-quarter section, section, township and range or other authorized survey designation acceptable to the authorized officer such as metes and bounds).
- 7. <u>Subsequent Plugging Reporting</u>: Within 30 days after plugging work is completed, file one original and five copies of the Subsequent Report of Abandonment, Form 3160-5 to BLM. The report should give in detail the manner in which the plugging work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. **Show date well was plugged.**
- 8. <u>Trash:</u> All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.

Following the submission and approval of the Subsequent Report of Abandonment, surface restoration conditions of approval will be developed and furnished to you.