

Submit 1 Copy To Appropriate District
Office
District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM
87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
October 13, 2009

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO.
30-015-24274

5. Indicate Type of Lease
STATE ☐ FEE ☒

6. State Oil & Gas Lease No.

7. Lease Name or Unit Agreement Name
Jackson AT

8. Well Number
14

9. OGRID Number
025575

10. Pool name or Wildcat
Eagle Creek; San Andres

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A
DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH
PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐

2. Name of Operator
Yates Petroleum Corporation

3. Address of Operator
105 South Fourth Street, Artesia, NM 88210

4. Well Location

Unit Letter N : 330 feet from the South line and 1650 feet from the West line
Section 14 Township 17S Range 25E NMPM Eddy County

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
3495'GR

RECEIVED

JAN 28 2010

NMOCD ARTESIA

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☐
CASING/CEMENT JOB ☐

OTHER: ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Yates Petroleum Corporation plans to plug and abandon this well as follows:

1. MIRU WSC. Rig up any safety equipment as needed.
2. RIH with tubing to 1249', spot 30 sx thixotropic cement across perforations. WOC 2 hrs. Tag plug, reset if necessary.
3. RIH with tubing to top of the previous plug and load hole with plugging mud. Spot a 400' (30 sx) Class "C" cement plug across and over the intermediate casing shoe. WOC 3 hrs. Tag plug, reset if necessary.
4. RIH with tubing to 400' and spot a 400' (30 sx) Class "C" cement plug across the surface casing shoe and up to the surface from 0-400'. WOC and tag plug, reset if necessary.
5. Cut off wellhead, install marker and clean up location as per regulated.

NOTE: Yates Petroleum Corporation will use steel pits and no earth pits

**Notify OCD 24 hrs. prior
To any work done.**

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Tina Huerta TITLE Regulatory Compliance Supervisor DATE January 27, 2010

Type or print name Tina Huerta E-mail address: tinah@yatespetroleum.com PHONE: 575-748-4168


For State Use Only

APPROVED BY [Signature] TITLE Approval Granted providing work is complete by 5/1/2010 DATE 2/1/2010
Conditions of Approval (if any):

WELL NAME: Jackson AT #14 **FIELD:** Eagle Creek
LOCATION: 330' FSL & 1,650' FWL of Section 14-17S-25E Eddy Co., NM
GL: 3,495' **ZERO:** **KB:** **CASING PROGRAM**
SPUD DATE: 10/21/82 **COMPLETION DATE:** 11/5/82
COMMENTS:

10-3/4" 40.5# J-55	341'
7" 20# J-55 STC	1,197'
4-1/2" 9 5# J-55	1,490'

14-3/4"
Hole

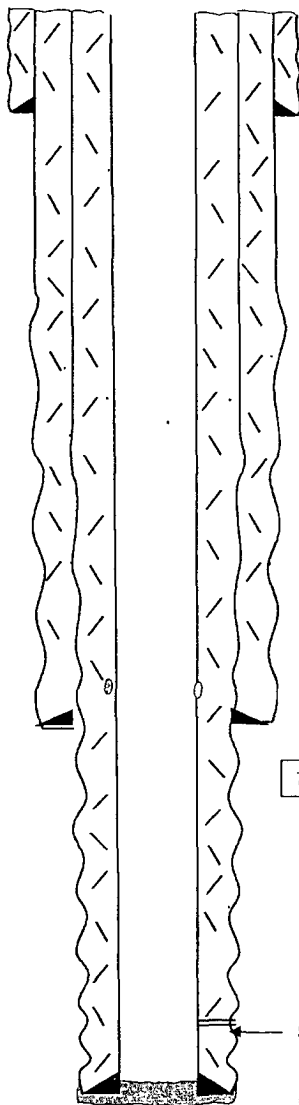

10-3/4" @ 341' w/225 sx cmt

Before

9-7/8" Hole

TOPS
SA 710'

6-1/4" Hole

7" @ 1,154' w/550sx (Circ)

SA Perfs: 1,249-1,412'

4-1/2" @ 1,490' w/200 sx (Circ)

PBTD: 1,490'
TD 1,500'


Not to Scale
 9/1/09
 DC/Hill

WELL NAME: Jackson AT #14 **FIELD:** Eagle Creek
LOCATION: 330' FSL & 1,650' FWL of Section 14-17S-25E Eddy Co., NM
GL: 3,495' **ZERO:** **KB:** **SPUD DATE:** 10/21/82 **COMPLETION DATE:** 11/5/82
COMMENTS:

CASING PROGRAM

10-3/4" 40.5# J-55	341'
7" 20# J-55 STC	1,197'
4-1/2" 9.5# J-55	1,490'

14-3/4"
Hole

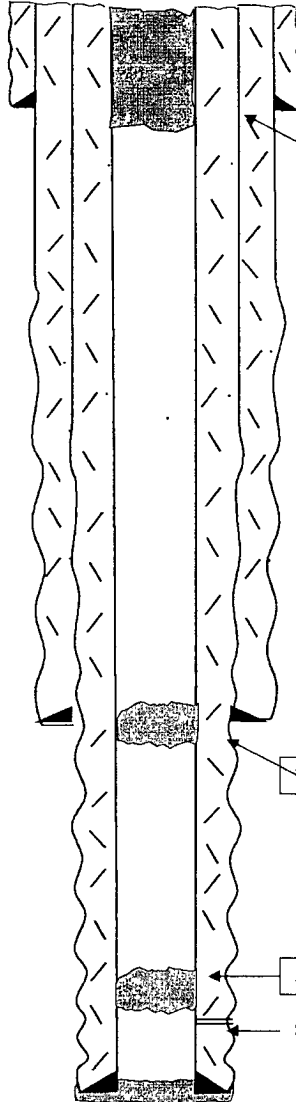

10-3/4" @ 341' w/225 sx cmt

0-400' cmt plug across casing shoe w/30 sx cmt

After

9-7/8" Hole

400' plug w/30 sx across Intermediate casing shoe

7" @ 1,154' w/550sx (Circ)

6-1/4" Hole

30 sx cmt plug across perms

SA Perfs: 1,249-1,412'

4-1/2" @ 1,490' w/200 sx (Circ)

PBTD 1,490'
 TD: 1,500'

TOPS
 SA 710'

Not to Scale
 9/1/09
 DC/Hill