

Oil Cons.
N.M. DIV-Dist. 2
1301 W. Grand Avenue
Artesia, NM 88210

Form 3160-5
(June 1990)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

RECEIVED
JAN 26 2004
OCD-ARTESIA

SUBMIT IN TRIPLICATE

1. Type of Well
☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

Mack Energy Corporation

3. Address and Telephone No.

P.O. Box 960, Artesia, NM 88211-0960

(505)748-1288

4. Location of Well (Footage, Sec., T. R., M. or Survey Description)

2310 FNL & 1650 FEL, Sec. 20-T17S-R28E, G

5. Lease Designation and Serial No.

LC-065729

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

Red Lake Sand Unit #30

9. API Well No.

30-015-01467

10. Field and Pool, or Exploratory Area

Red Lake; Queen-Grayburg-SA

11. County or Parish, State

Eddy, NM

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☒ Notice of Intent
☐ Subsequent Report
☐ Final Abandonment Notice

TYPE OF ACTION


- ☒ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☐ Other _____
- ☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Mack Energy Corporation proposes to plug and abandon well as follows:

1. Notify BLM 24 hours prior to starting plugging operations.
2. Set 100' plug from 1709-1609'. WOC and tag.
3. Circulate hole w/mud gel.
4. Perforate @ 476' squeeze 100' plug 50' above and below 8 5/8 casing. WOC and tag..
5. Perforate @ 60' circulate cement to surface.
6. Install dry hole marker.

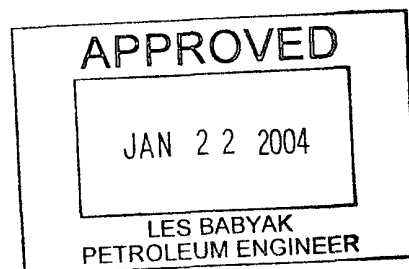

14. I hereby certify that the foregoing is true and correct

Signed

Gerry W. Shenell

Title

Production Clerk

Date

1/14/04

(This space for Federal or State office use)

Approved by

Conditions of approval, if any:

Title

Date

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.


*See Instruction on Reverse Side

MACK ENERGY CORPORATION
RED LAKE SAND UNIT #30
Sec 20 T17S R28E 2310 FNL 1650 FEL

BLM

BEFORE

AFTER

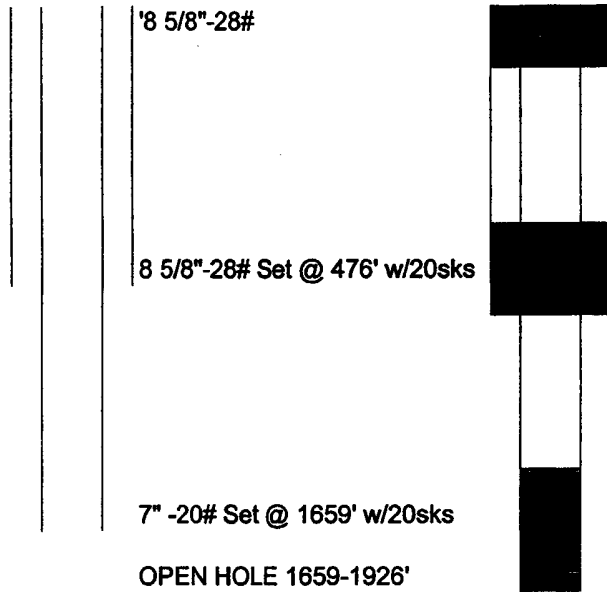

1. Notify BLM 24 hrs. prior to any work done.
2. Set 100' cmt plug 1709'-1609' and tag.
3. Circ hole with mud gel.
4. Perf @ 476' squeeze 100' cmt plug 50' above & below 8 5/8" and tag.
5. Perf @ 60' circ cmt to surface
6. Install Dry Hole Marker