

Submit 1 Copy To Appropriate District
Office
District I
1625 N French Dr., Hobbs, NM 88240
District II
1301 W Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd, Aztec, NM 87410
District IV
1220 S St Francis Dr, Santa Fe, NM
87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
October 13, 2009

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS)		WELL API NO. 30-015-22328
1. Type of Well: Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/>		5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
2. Name of Operator Yates Petroleum Corporation		6. State Oil & Gas Lease No.
3. Address of Operator 105 South Fourth Street, Artesia, NM 88210		7. Lease Name or Unit Agreement Name Gushwa DR
4. Well Location Unit Letter <u>F</u> : <u>1650</u> feet from the <u>North</u> line and <u>2310</u> feet from the <u>West</u> line Section <u>35</u> Township <u>18S</u> Range <u>25E</u> NMPM <u>Eddy</u> County		8. Well Number 2
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3499'GR		9. OGRID Number 025575
		10. Pool name or Wildcat Penasco Draw; SA Yeso

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☐
CASING/CEMENT JOB ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent data, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach well log diagram of proposed completion or recompletion.

Yates Petroleum Corporation plans to plug and abandon this well as follows:

1. MIRU WSU. Rig up any safety equipment as needed. POOH with production equipment.
2. Set a CIBP at 2116'. Pressure test casing and spot a 25 sx cement plug from 1756'-2116' across Glorieta top and over the CIBP.
3. Spot a 300' (25 sx) Class "C" cement plug across and or over intermediate casing shoe from 880'-1180'. WOC 3 hrs. Tag plug, reset if necessary.
4. Spot a 430' (40 sx) Class "C" cement plug across surface casing shoe and up to surface from 0-430'. WOC and tag plug, reset if necessary.
5. Remove all surface equipment, weld dry hole marker and clean location as per regulations.

NOTE: Yates Petroleum Corporation will use steel pits and no earth pits

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Tina Huerta TITLE Regulatory Compliance Supervisor DATE July 15, 2010

Type or print name Tina Huerta E-mail address: tinah@yatespetroleum.com PHONE: 575-748-4168

For State Use Only

APPROVED BY: PH Huerta TITLE Approval Granted providing work is complete by 10/29/2010 DATE 7/29/2010

WELL NAME: Gushwa DR #2 FIELD: Penasco Draw
 LOCATION: 1650' FNL & 2319' FWL of Section 35-18S-25E Eddy Co., NM
 GL: 3,499' ZERO: _____ KB: _____
 SPUD DATE: 10/30/77 COMPLETION DATE: 11/26/77
 COMMENTS: API No.: 30-015-22328


CASING PROGRAM

10-3/4" 41# J-55	<u>380'</u>
7" 20# J-55	<u>1,130'</u>
5-1/2" 11.5 J55 (1078')	
4-1/2" 9.5 J55 (1322')	<u>2400'</u>

15" Hole

9-1/2" Hole

6-1/8" Hole

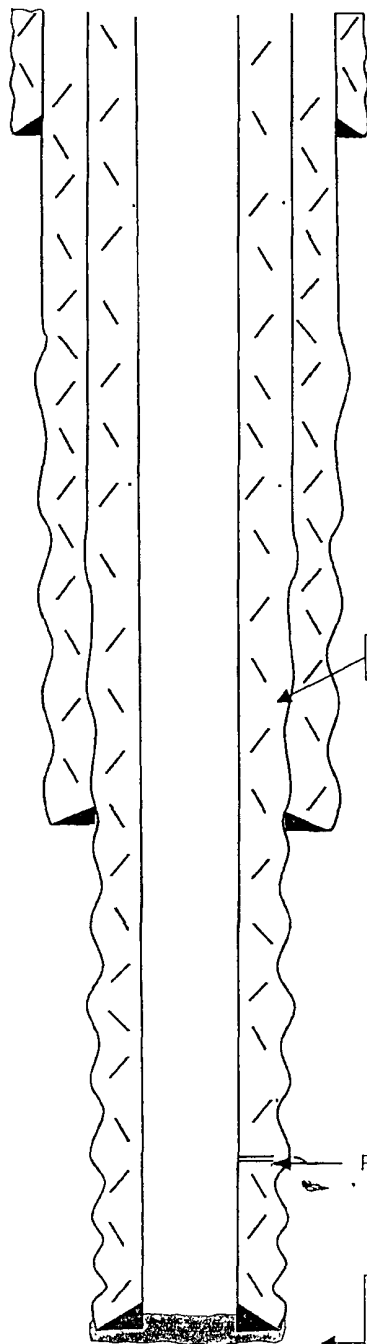

10-3/4" @ 380' w/ 250
sx (Circ)

Before

TOPS

SA 726'
Glorieta 2,050'

4-1/2" x 5-1/5" Crossover at 1,078'

7" @ 1,130' w/400
1"ed to surface with 400 sx
(Circ)

Perfs. 2,166-2,340'

Ran 34 joints 4-1/2" and 27 joints
5-1/2" set at 2,400' cmted with
250 sx (Circ)

TD: 2400'

Not to Scale
1/15/10
DC/Hill

WELL NAME: Gushwa DR #2 FIELD: Penasco Draw
 LOCATION: 1650' FNL & 2319' FWL of Section 35-18S-25E Eddy Co., NM
 GL: 3,499' ZERO: _____ KB: _____
 SPUD DATE: 10/30/77 COMPLETION DATE: 11/26/77
 COMMENTS: API No.: 30-015-22328

CASING PROGRAM

10-3/4" 41# J-55	380'
7" 20# J-55	1,130'
5-1/2" 11.5 J55 (1078')	
4-1/2" 9.5 J55 (1322')	2400'

After


TOPS

SA 726'
 Glorieta 2,050'

15" Hole

9-1/2" Hole

6-1/8" Hole

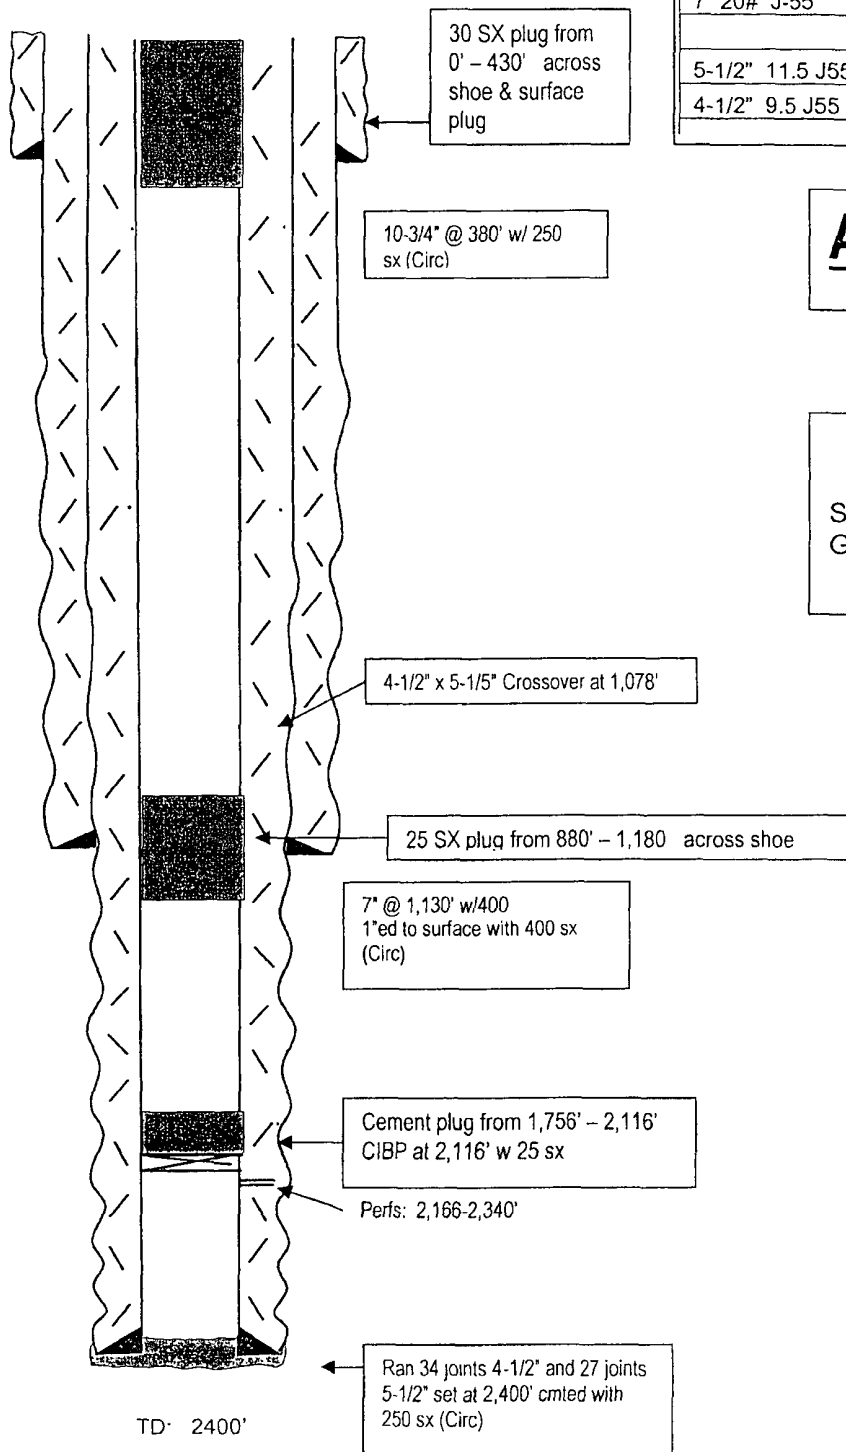

Not to Scale
 1/15/10
 DC/Hill