


30-015-33133

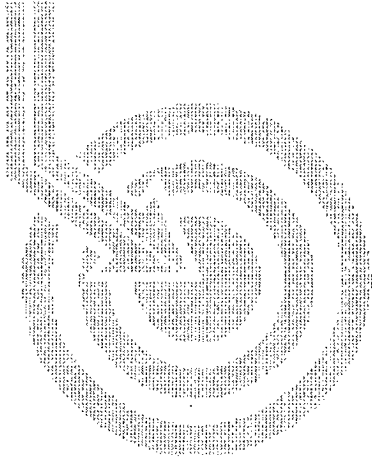

Scientific Drilling

BURNETT OIL COMPANY


Field: Cedar Lake Yeso
Site: Eddy County, NM
Well: Jackson B #41
Wellpath: VH - Job #32K0610476
Survey: 06/26/10

This survey is correct to the best of my knowledge and is supported by actual field data.

[Signature]
Company Representative

Notarized this date 10th of July, 2010.

Carrie Reed
Notary Signature
County of Midland
State of Texas

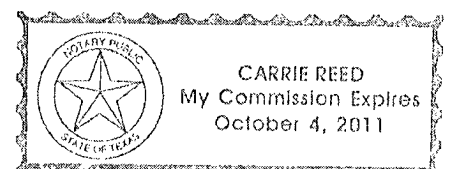



Scientific
Drilling

Scientific Drilling International, Inc.

Survey Report

Company: BURNETT OIL COMPANY
Field: Cedar Lake Yeso
Site: Eddy County, NM
Well: Jackson B #41
Wellpath: VH - Job #32K0610476

Date: 6/30/2010 Time: 09:49:38 Page: 1
Co-ordinate(N/E) Reference: Site: Eddy County, NM, Grid North
Vertical (TVD) Reference: SITE 0.0
Section (VS) Reference: Well (0.00N,0.00E,356.53Azi)
Survey Calculation Method: Minimum Curvature Db: Sybase

Survey: 06/26/10
KSRG 0'-3486'

Start Date: 6/26/2010

Company: Scientific Drilling Internatio
Tool: Keeper, Keeper Gyro

Engineer: Sutherland w/Dialog
Tied-to: From Surface


Survey

MD ft	Incl deg	Azim deg	TVD ft	VS ft	N/S ft	E/W ft	DLS deg/100ft	ClsD ft	ClsA deg
0.0	0.00	359.77	0.0	0.0	0.0	0.0	0.00	0.0	0.00
100.0	0.43	3.85	100.0	0.4	0.4	0.0	0.43	0.4	3.85
200.0	0.43	333.53	200.0	1.1	1.1	-0.1	0.22	1.1	353.85
300.0	0.39	11.32	300.0	1.8	1.8	-0.2	0.27	1.8	352.94
400.0	0.95	318.24	400.0	2.7	2.7	-0.7	0.78	2.8	345.45
500.0	1.31	317.52	500.0	4.3	4.2	-2.0	0.36	4.6	334.07
600.0	1.36	314.23	599.9	6.0	5.8	-3.6	0.09	6.9	328.00
700.0	1.27	313.95	699.9	7.7	7.4	-5.3	0.09	9.1	324.53
800.0	0.77	333.67	799.9	9.2	8.8	-6.4	0.60	10.9	324.02
900.0	0.72	346.95	899.9	10.4	10.0	-6.8	0.18	12.1	325.71
1000.0	0.63	10.69	999.9	11.6	11.2	-6.9	0.29	13.1	328.40
1100.0	1.11	32.60	1099.9	12.9	12.5	-6.2	0.58	14.0	333.49
1200.0	1.04	27.49	1199.9	14.4	14.2	-5.3	0.12	15.1	339.44
1300.0	1.15	19.35	1299.8	16.1	15.9	-4.6	0.19	16.5	344.01
1400.0	1.44	12.91	1399.8	18.3	18.1	-3.9	0.32	18.5	347.69
1500.0	1.96	5.73	1499.8	21.2	21.0	-3.5	0.56	21.3	350.56
1600.0	1.65	353.43	1599.7	24.3	24.1	-3.5	0.49	24.4	351.78
1700.0	1.47	337.74	1699.7	27.0	26.7	-4.1	0.46	27.1	351.21
1800.0	1.09	337.84	1799.7	29.1	28.8	-5.0	0.38	29.2	350.19
1900.0	1.15	337.29	1899.6	30.9	30.6	-5.7	0.06	31.2	349.41
2000.0	1.15	336.15	1999.6	32.8	32.5	-6.5	0.02	33.1	348.64
2100.0	1.15	342.91	2099.6	34.7	34.3	-7.2	0.14	35.1	348.13
2200.0	1.20	350.57	2199.6	36.7	36.3	-7.7	0.16	37.1	348.05
2300.0	1.17	351.36	2299.6	38.8	38.4	-8.0	0.03	39.2	348.21
2400.0	1.33	356.75	2399.5	41.0	40.5	-8.2	0.20	41.4	348.52
2500.0	1.48	349.90	2499.5	43.4	43.0	-8.5	0.22	43.8	348.78
2600.0	1.36	346.10	2599.5	45.9	45.4	-9.0	0.15	46.3	348.74
2700.0	1.41	357.15	2699.4	48.3	47.8	-9.4	0.27	48.7	348.89
2800.0	1.60	0.90	2799.4	50.9	50.4	-9.4	0.21	51.3	349.41
2900.0	1.50	358.45	2899.4	53.6	53.1	-9.4	0.12	53.9	349.93
3000.0	1.15	356.70	2999.3	55.9	55.4	-9.5	0.35	56.2	350.25
3100.0	1.34	357.45	3099.3	58.1	57.6	-9.6	0.19	58.4	350.50
3200.0	1.54	337.35	3199.3	60.5	60.0	-10.2	0.54	60.9	350.35
3300.0	1.39	322.47	3299.3	62.8	62.2	-11.5	0.41	63.2	349.56
3400.0	1.35	336.25	3399.2	64.9	64.2	-12.7	0.33	65.5	348.84
3486.0	2.17	312.84	3485.2	67.0	66.3	-14.3	1.25	67.8	347.84




Scientific
Drilling

Field: Cedar Lake Yeso
Site: Eddy County, NM
Well: Jackson B #41
Survey: 06/26/10

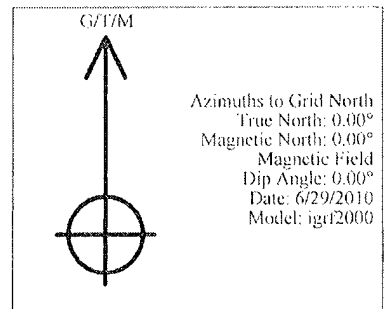

South(-)/North(+) [10ft/m]

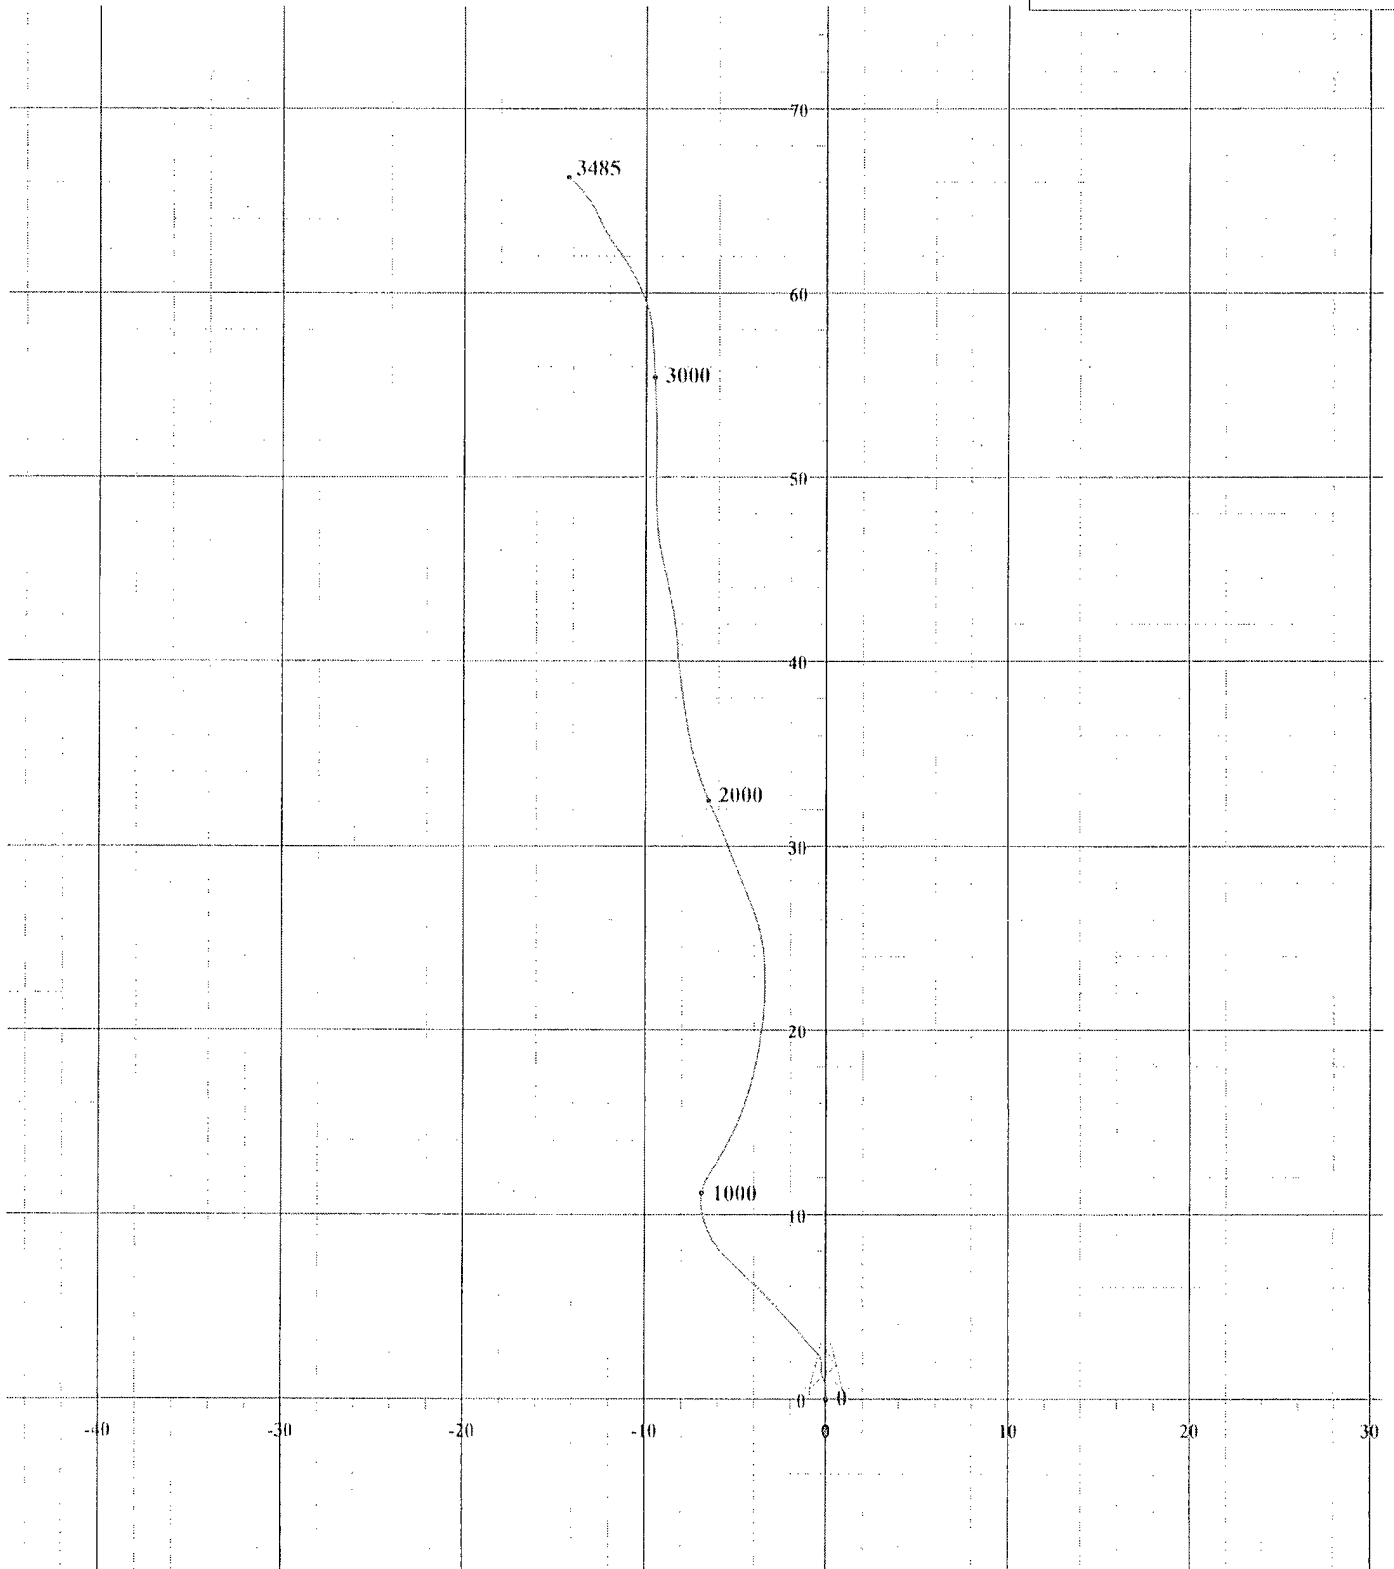

West(-)/East(+) [10ft/m]

Allis-Chalmers Energy, Inc.

Survey Report

Company: BURNETT OIL CO. INC.		Date: 07/05/2010	Time: 09:58:43	Page: 1						
Field: Eddy County, NM		Co-ordinate(NE) Reference: Well: #41H RE, Grid North								
Site: Jackson "B" 41H RE		Vertical (TVD) Reference: 3671'GL+12'KB 3683.0								
Well: #41H RE		Section (VS) Reference: Well (0.00N,0.00E,342.74Azi)								
Wellpath: Lateral		Survey Calculation Method: Minimum Curvature Db: Sybase								
Field: Eddy County, NM										
Map System: US State Plane Coordinate System 1927		Map Zone: New Mexico, Eastern Zone								
Geo Datum: NAD27 (Clarke 1866)		Coordinate System: Well Centre								
Sys Datum: Mean Sea Level		Geomagnetic Model: IGRF2010								
Site: Jackson "B" 41H RE										
Site Position:	Northings: 662549.93 ft	Latitude: 32 49 14.688 N								
From: Map	Easting: 627731.90 ft	Longitude: 103 55 3.155 W								
Position Uncertainty: 0.00 ft		North Reference: Grid								
Ground Level: 3671.00 ft		Grid Convergence: 0.23 deg								
Well: #41H RE Slot Name:										
Well Position: +N/-S 0.00 ft	Northings: 662549.93 ft	Latitude: 32 49 14.688 N								
+E/-W 0.00 ft	Easting: 627731.90 ft	Longitude: 103 55 3.155 W								
Position Uncertainty: 0.00 ft										
Wellpath: Lateral										
Current Datum: 3671'GL+12'KB	Height: 3683.00 ft	Drilled From: Original Hole								
Magnetic Data: 06/29/2010		Tie-on Depth: 4529.00 ft								
Field Strength: 49060 nT		Above System Datum: Mean Sea Level								
Vertical Section: Depth From (TVD)	+N/-S	Declination: 7.91 deg								
ft	ft	Mag Dip Angle: 60.70 deg								
		+E/-W	Direction							
		ft	deg							
0.00	0.00	0.00	342.74							
Survey Program for Definitive Wellpath										
Date: 07/05/2010	Validated: No	Version: 0								
Actual From	To	Survey	Toolcode	Tool Name						
ft	ft									
100.00	3486.00	Survey #1 (100.00-3486.00)	Gyroscope	Gyroscope						
3581.00	6658.00	Survey #2 (3581.00-6658.00)	MWD	Std MWD						
6740.00	6740.00	Survey #3 (6740.00-6740.00)	Project	Projection						
Survey										
MD ft	Incl deg	Azim deg	TVD ft	+N/-S ft	+E/-W ft	VS ft	DLS deg/100ft	Build deg/100ft	Turn deg/100ft	Tool/Comment
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	TIE LINE
100.00	0.43	3.85	100.00	0.37	0.03	0.35	0.43	0.43	0.00	Gyroscope
200.00	0.43	333.53	200.00	1.08	-0.12	1.07	0.22	0.00	-30.32	Gyroscope
300.00	0.39	11.32	299.99	1.75	-0.22	1.74	0.27	-0.04	37.79	Gyroscope
400.00	0.95	318.24	399.99	2.71	-0.70	2.79	0.78	0.56	-53.08	Gyroscope
500.00	1.31	317.52	499.97	4.17	-2.03	4.58	0.36	0.36	-0.72	Gyroscope
600.00	1.36	314.23	599.94	5.84	-3.65	6.66	0.09	0.05	-3.29	Gyroscope
700.00	1.27	313.95	699.91	7.44	-5.30	8.67	0.09	-0.09	-0.28	Gyroscope
800.00	0.77	333.67	799.90	8.81	-6.39	10.31	0.60	-0.50	19.72	Gyroscope
900.00	0.72	346.95	899.89	10.02	-6.83	11.60	0.18	-0.05	13.28	Gyroscope
1000.00	0.63	10.69	999.88	11.17	-6.87	12.71	0.29	-0.09	23.74	Gyroscope
1100.00	1.11	32.60	1099.87	12.53	-6.25	13.82	0.58	0.48	21.91	Gyroscope
1200.00	1.04	27.49	1199.85	14.15	-5.31	15.09	0.12	-0.07	-5.11	Gyroscope
1300.00	1.15	19.35	1299.84	15.90	-4.56	16.54	0.19	0.11	-8.14	Gyroscope
1400.00	1.44	12.91	1399.81	18.07	-3.94	18.43	0.32	0.29	-6.44	Gyroscope
1500.00	1.96	5.73	1499.77	21.00	-3.49	21.09	0.56	0.52	-7.18	Gyroscope
1600.00	1.65	353.43	1599.72	24.13	-3.49	24.08	0.49	-0.31	-12.30	Gyroscope
1700.00	1.47	337.74	1699.68	26.75	-4.14	26.77	0.46	-0.18	-15.69	Gyroscope
1800.00	1.09	337.84	1799.66	28.82	-4.98	29.00	0.38	-0.38	0.10	Gyroscope
1900.00	1.15	337.29	1899.64	30.62	-5.73	30.94	0.06	0.06	-0.55	Gyroscope
2000.00	1.15	336.15	1999.62	32.47	-6.52	32.94	0.02	0.00	-1.14	Gyroscope

Allis-Chalmers Energy, Inc.

Survey Report

Company: BURNETT OIL CO. INC.
Field: Eddy County, NM
Site: Jackson "B" 41H RE
Well: #41H RE
Wellpath: Lateral

Date: 07/05/2010 Time: 09:58:43 Page: 2
Co-ordinate(NE) Reference: Well: #41H RE, Grid North
Vertical (TVD) Reference: 3671'GL+12'KB 3683.0
Section (VS) Reference: Well (0.00N,0.00E,342.74Azi)
Survey Calculation Method: Minimum Curvature Db: Sybase

Survey

MD ft	Incl deg	Azim deg	TVD ft	+N/-S ft	+E/-W ft	VS ft	DLS deg/100ft	Build deg/100ft	Turn deg/100ft	Tool/Comment
2100.00	1.15	342.91	2099.60	34.34	-7.22	34.94	0.14	0.00	6.76	Gyroscope
2200.00	1.20	350.57	2199.57	36.34	-7.69	36.98	0.16	0.05	7.66	Gyroscope
2300.00	1.17	351.36	2299.55	38.38	-8.01	39.03	0.03	-0.03	0.79	Gyroscope
2400.00	1.33	356.75	2399.53	40.55	-8.23	41.16	0.20	0.16	5.39	Gyroscope
2500.00	1.48	349.90	2499.50	42.96	-8.52	43.57	0.22	0.15	-6.85	Gyroscope
2600.00	1.36	346.10	2599.47	45.40	-9.04	46.04	0.15	-0.12	-3.80	Gyroscope
2700.00	1.41	357.15	2699.44	47.78	-9.38	48.41	0.27	0.05	11.05	Gyroscope
2800.00	1.60	0.90	2799.41	50.41	-9.42	50.93	0.21	0.19	3.75	Gyroscope
2900.00	1.50	358.45	2899.37	53.11	-9.43	53.52	0.12	-0.10	-2.45	Gyroscope
3000.00	1.15	356.70	2999.34	55.42	-9.53	55.75	0.35	-0.35	-1.75	Gyroscope
3100.00	1.34	357.45	3099.32	57.59	-9.64	57.86	0.19	0.19	0.75	Gyroscope
3200.00	1.54	337.35	3199.29	60.00	-10.21	60.33	0.54	0.20	-20.10	Gyroscope
3300.00	1.39	322.47	3299.25	62.20	-11.46	62.80	0.41	-0.15	-14.88	Gyroscope
3400.00	1.35	336.25	3399.23	64.24	-12.68	65.11	0.33	-0.04	13.78	Gyroscope
3486.00	2.17	312.84	3485.19	66.28	-14.28	67.53	1.25	0.95	-27.22	Gyroscope
3581.00	4.20	300.00	3580.04	69.24	-18.61	71.64	2.25	2.14	-13.52	MWD
3613.00	4.40	287.10	3611.95	70.18	-20.80	73.20	3.08	0.62	-40.31	MWD
3644.00	5.80	288.10	3642.82	71.02	-23.42	74.77	4.53	4.52	3.23	MWD
3676.00	6.40	283.30	3674.64	71.93	-26.70	76.62	2.46	1.87	-15.00	MWD
3708.00	6.20	281.70	3706.45	72.69	-30.12	78.36	0.83	-0.62	-5.00	MWD
3739.00	6.00	283.70	3737.27	73.42	-33.34	80.00	0.94	-0.65	6.45	MWD
3771.00	5.90	280.40	3769.10	74.11	-36.58	81.63	1.11	-0.31	-10.31	MWD
3833.00	5.90	282.80	3830.77	75.39	-42.82	84.70	0.40	0.00	3.87	MWD
3897.00	6.10	281.60	3894.42	76.80	-49.36	87.99	0.37	0.31	-1.87	MWD
3960.00	5.70	283.20	3957.09	78.19	-55.69	91.19	0.69	-0.63	2.54	MWD
4022.00	6.60	280.40	4018.73	79.54	-62.19	94.41	1.53	1.45	-4.52	MWD
4086.00	6.50	280.80	4082.31	80.88	-69.36	97.82	0.17	-0.16	0.62	MWD
4149.00	6.40	280.60	4144.91	82.20	-76.32	101.14	0.16	-0.16	-0.32	MWD
4212.00	6.30	279.20	4207.53	83.39	-83.18	104.32	0.29	-0.16	-2.22	MWD
4262.00	6.40	278.10	4257.22	84.22	-88.65	106.73	0.31	0.20	-2.20	MWD
4325.00	6.70	287.20	4319.81	85.81	-95.64	110.32	1.71	0.48	14.44	MWD
4388.00	6.90	289.00	4382.37	88.13	-102.72	114.64	0.46	0.32	2.86	MWD
4452.00	7.00	286.00	4445.90	90.45	-110.11	119.05	0.59	0.16	-4.69	MWD
4513.00	6.70	286.20	4506.46	92.47	-117.10	123.05	0.49	-0.49	0.33	MWD
4545.00	6.80	286.60	4538.24	93.53	-120.71	125.13	0.35	0.31	1.25	MWD
4576.00	8.60	292.10	4568.96	94.93	-124.61	127.63	6.27	5.81	17.74	MWD
4608.00	15.40	300.00	4600.24	97.96	-130.52	132.27	21.81	21.25	24.69	MWD
4639.00	22.00	304.10	4629.59	103.28	-138.90	139.84	21.70	21.29	13.23	MWD
4670.00	28.00	301.00	4657.68	110.29	-149.96	149.81	19.80	19.35	-10.00	MWD
4702.00	33.80	306.40	4685.13	119.45	-163.57	162.60	20.07	18.12	16.87	MWD
4734.00	39.60	309.40	4710.78	131.21	-178.63	178.30	18.97	18.12	9.37	MWD
4765.00	45.00	312.10	4733.70	144.84	-194.41	196.00	18.38	17.42	8.71	MWD
4796.00	48.90	311.80	4754.86	159.98	-211.26	215.46	12.60	12.58	-0.97	MWD
4828.00	49.40	311.00	4775.79	175.99	-229.41	236.13	2.45	1.56	-2.50	MWD
4860.00	52.00	311.60	4796.05	192.33	-248.01	257.26	8.25	8.12	1.87	MWD
4870.49	53.96	312.10	4802.37	197.92	-254.25	264.45	19.07	18.69	4.73	BHL
4891.00	57.80	313.00	4813.87	209.40	-266.76	279.12	19.07	18.72	4.41	MWD
4923.00	63.70	314.30	4829.50	228.67	-286.94	303.51	18.77	18.44	4.06	MWD
4954.00	69.50	316.90	4841.81	249.00	-306.83	328.82	20.23	18.71	8.39	MWD
4986.00	74.70	318.60	4851.64	271.53	-327.29	356.41	17.02	16.25	5.31	MWD
5017.00	79.60	319.00	4858.53	294.27	-347.19	384.03	15.86	15.81	1.29	MWD
5049.00	83.70	319.30	4863.18	318.21	-367.90	413.04	12.85	12.81	0.94	MWD
5081.00	87.90	320.10	4865.52	342.55	-388.53	442.40	13.36	13.12	2.50	MWD
5112.00	91.00	320.80	4865.82	366.44	-408.27	471.08	10.25	10.00	2.26	MWD

Allis-Chalmers Energy, Inc.

Survey Report

Company: BURNETT OIL CO. INC.	Date: 07/05/2010	Time: 09:58:43	Page: 3
Field: Eddy County, NM	Co-ordinate(NE) Reference: Well: #41H RE, Grid North		
Site: Jackson "B" 41H RE	Vertical (TVD) Reference: 3671'GL+12'KB 3683.0		
Well: #41H RE	Section (VS) Reference: Well (0.00N,0.00E,342.74Azi)		
Wellpath: Lateral	Survey Calculation Method: Minimum Curvature		Db: Sybase

Survey

MD ft	Incl deg	Azim deg	TVD ft	+N/-S ft	+E/-W ft	VS ft	DLS deg/100ft	Build deg/100ft	Turn deg/100ft	Tool/Comment
5144.00	92.10	325.90	4864.96	392.10	-427.36	501.24	16.30	3.44	15.94	MWD
5175.00	92.00	330.50	4863.85	418.42	-443.68	531.22	14.83	-0.32	14.84	MWD
5207.00	91.40	335.30	4862.90	446.89	-458.24	562.73	15.11	-1.87	15.00	MWD
5238.00	91.00	337.10	4862.25	475.24	-470.75	593.52	5.95	-1.29	5.81	MWD
5270.00	91.80	339.40	4861.46	504.96	-482.60	625.41	7.61	2.50	7.19	MWD
5302.00	93.10	344.00	4860.10	535.30	-492.64	657.36	14.93	4.06	14.37	MWD
5333.00	93.40	346.20	4858.34	565.21	-500.60	688.29	7.15	0.97	7.10	MWD
5364.00	92.80	348.80	4856.66	595.43	-507.30	719.13	8.60	-1.94	8.39	MWD
5398.00	92.00	352.50	4855.24	628.94	-512.81	752.77	11.12	-2.35	10.88	MWD
5430.00	91.50	352.70	4854.26	660.66	-516.93	784.29	1.68	-1.56	0.62	MWD
5462.00	91.30	352.00	4853.48	692.36	-521.19	815.83	2.27	-0.62	-2.19	MWD
5493.00	92.20	353.50	4852.53	723.10	-525.10	846.34	5.64	2.90	4.84	MWD
5525.00	92.40	353.50	4851.25	754.87	-528.72	877.75	0.62	0.62	0.00	MWD
5557.00	93.00	355.30	4849.74	786.68	-531.84	909.05	5.92	1.87	5.62	MWD
5588.00	92.70	355.70	4848.20	817.54	-534.27	939.25	1.61	-0.97	1.29	MWD
5651.00	92.50	354.90	4845.34	880.27	-539.43	1000.68	1.31	-0.32	-1.27	MWD
5712.00	92.70	356.50	4842.57	941.03	-544.00	1060.06	2.64	0.33	2.62	MWD
5775.00	92.40	356.80	4839.77	1003.86	-547.67	1121.15	0.67	-0.48	0.48	MWD
5841.00	92.20	356.90	4837.12	1069.71	-551.30	1185.11	0.34	-0.30	0.15	MWD
5904.00	92.20	356.80	4834.70	1132.57	-554.76	1246.17	0.16	0.00	-0.16	MWD
5967.00	92.20	356.60	4832.28	1195.42	-558.38	1307.26	0.32	0.00	-0.32	MWD
6029.00	92.00	356.60	4830.01	1257.27	-562.06	1367.41	0.32	-0.32	0.00	MWD
6091.00	91.70	356.40	4828.01	1319.12	-565.84	1427.60	0.58	-0.48	-0.32	MWD
6154.00	91.80	356.00	4826.09	1381.95	-570.01	1488.84	0.65	0.16	-0.63	MWD
6217.00	92.00	355.70	4824.00	1444.75	-574.57	1550.17	0.57	0.32	-0.48	MWD
6280.00	92.30	355.60	4821.63	1507.52	-579.34	1611.53	0.50	0.48	-0.16	MWD
6344.00	92.40	355.20	4819.01	1571.26	-584.47	1673.92	0.64	0.16	-0.62	MWD
6407.00	92.60	356.10	4816.26	1634.02	-589.25	1735.27	1.46	0.32	1.43	MWD
6469.00	92.70	356.30	4813.40	1695.82	-593.35	1795.51	0.36	0.16	0.32	MWD
6532.00	92.60	356.10	4810.48	1758.61	-597.52	1856.71	0.35	-0.16	-0.32	MWD
6595.00	92.30	355.50	4807.79	1821.39	-602.13	1918.02	1.06	-0.48	-0.95	MWD
6658.00	92.10	354.90	4805.37	1884.12	-607.40	1979.49	1.00	-0.32	-0.95	MWD
6740.00	92.10	354.90	4802.37	1965.74	-614.68	2059.60	0.00	0.00	0.00	PROJECTED to TD

Targets

Name	Description Dip.	Dir.	TVD ft	+N/-S ft	+E/-W ft	Map Northing ft	Map Easting ft	<--- Latitude --->			<--- Longitude --->		
B 45 @ TD			0.00	511.53	-1.01	663061.47	627730.89	32	49	19.750 N	103	55	3.144 W
-Circle (Radius: 85)													
B 45 SL			0.00	511.53	-1.01	663061.47	627730.89	32	49	19.750 N	103	55	3.144 W
A 20 SL			0.00	1321.65	46.61	663871.59	627778.51	32	49	27.764 N	103	55	2.548 W
Surface			0.00	0.00	0.00	662549.93	627731.90	32	49	14.688 N	103	55	3.155 W
B45 400'			0.00	511.53	-1.01	663061.47	627730.89	32	49	19.750 N	103	55	3.144 W
-Circle (Radius: 400)													
BHL			4802.37	1965.74	-614.68	664515.67	627117.22	32	49	34.163 N	103	55	10.268 W

BURNETT OIL CO. INC.



Field: Eddy County, NM
 Site: Jackson "B" 41H RE
 Well: #41H RE
 Wellpath: Lateral



Azimuths to Grid North
 True North: -0.23°
 Magnetic North: 7.69°

Magnetic Field
 Strength: 49060nT
 Dip Angle: 60.70°
 Date: 06/29/2010
 Model: IGRF2010

Surveys for the B 45 Well
 Are Inclination Only
 85' Radius to Show
 Possible Displacement

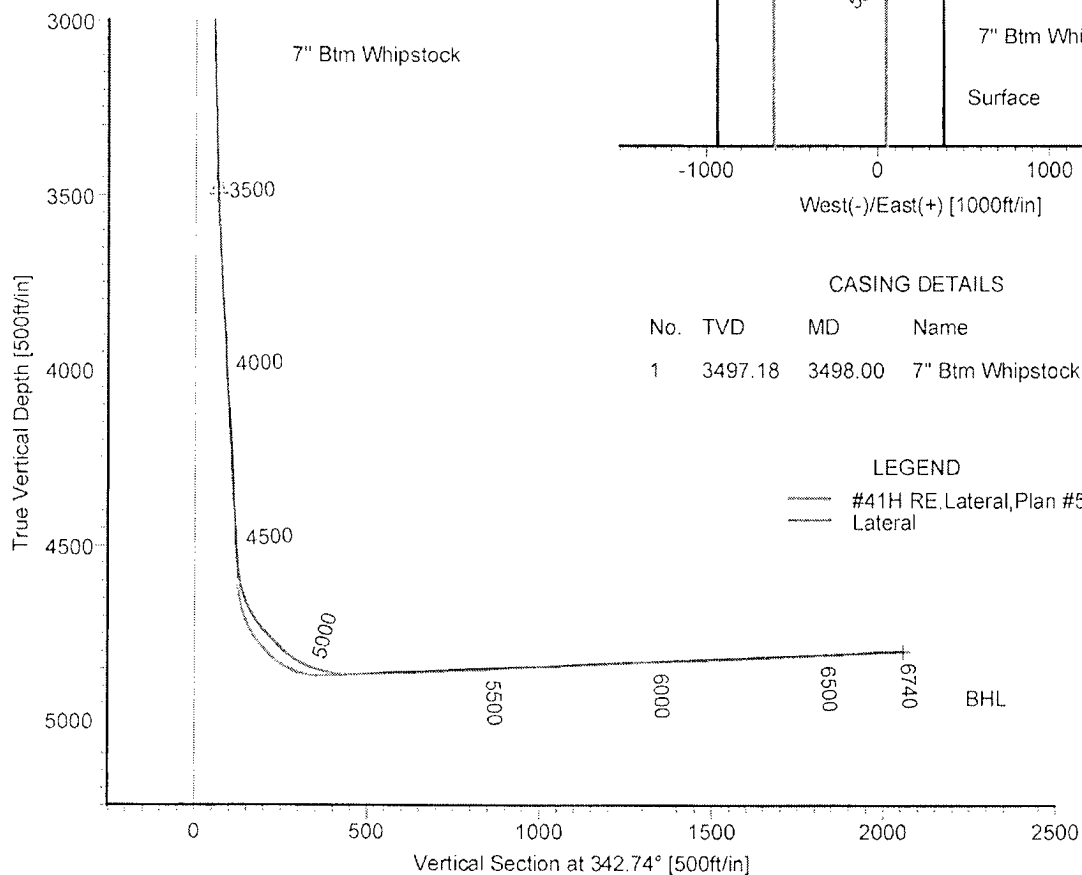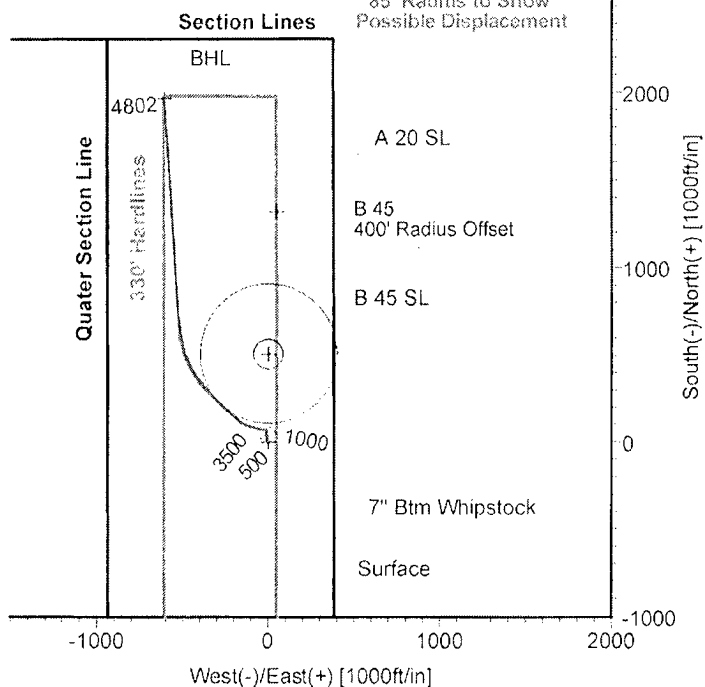

CASING DETAILS

No.	TVD	MD	Name	Size
1	3497.18	3498.00	7" Btm Whipstock	7.000

LEGEND

— #41H RE Lateral, Plan #5
 — Lateral

TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude	Shape
B 45 @ TD	0.00	511.53	-1.01	663061.47	627730.89	32°49'19.750N	103°55'03.144W	Circle (Radius: 85)
B 45 SL	0.00	511.53	-1.01	663061.47	627730.89	32°49'19.750N	103°55'03.144W	Point
A 20 SL	0.00	1321.65	46.61	663871.59	627778.51	32°49'27.764N	103°55'02.548W	Point
Surface	0.00	0.00	0.00	662549.93	627731.90	32°49'14.688N	103°55'03.155W	Point
B45 400'	0.00	511.53	-1.01	663061.47	627730.89	32°49'19.750N	103°55'03.144W	Circle (Radius: 400)
BHL	4802.37	1965.74	-614.68	664515.67	627117.22	32°49'34.163N	103°55'10.268W	Point

Wellpath: (#41H RE/Lateral)

ALLIS-CHALMERS DIRECTIONAL DRILLING SERVICES
 911 Regional Park Drive Houston, Texas 77060
 Phone: 713-934-9600 Fax: 713-934-9067



**DIRECTIONAL
 DRILLING SERVICES**

Created By: Yvonne Gonzalez

Date: 07/05/2010