


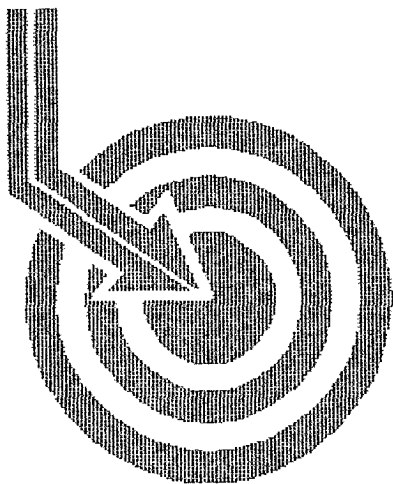

Scientific Drilling

30-015-37625

RECEIVED

NOV 22 2010
HOBBSUCD

DEVON ENERGY


Field: Willow Lake
Site: Eddy County, NM
Well: Cooter 16 State #1H
Wellpath: VH - Job #32K0410270
Survey: 04/18/10

This survey is correct to the best of my knowledge and is supported by actual field data.

Robert
Company Representative

Notarized this date 6th of May, 2010.

Carrie Reed
Notary Signature
County of Midland
State of Texas

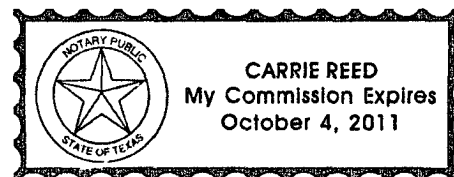



Scientific Drilling International, Inc.

Survey Report

Company: DEVON ENERGY	Date: 4/22/2010	Time: 11:33:39	Page: 1
Field: Willow Lake	Co-ordinate(NE) Reference:	Site: Eddy County, NM, Grid North	
Site: Eddy County, NM	Vertical (TVD) Reference:	SITE 0.0	
Well: Cooter 16 State #1H	Section (VS) Reference:	Well (0.00N,0.00E,0.53Azi)	
Wellpath: VH - Job #32K0410270	Survey Calculation Method: Minimum Curvature	Db: Sybase	

Survey: 04/18/10	Start Date: 4/18/2010
KSRG 0'-5920'	
Company: Scientific Drilling Internatio	Engineer: Madrid/Rowe/Williams
Tool: Keeper, Keeper Gyro	Tied-to: From Surface

Survey

MD ft	Incl deg	Azim deg	TVD ft	VS ft	N/S ft	E/W ft	DLS deg/100ft	ClsD ft	ClsA deg
0.0	0.00	359.82	0.0	0.0	0.0	0.0	0.00	0.0	0.00
100.0	0.79	173.60	100.0	-0.7	-0.7	0.1	0.79	0.7	173.60
200.0	0.14	124.83	200.0	-1.4	-1.4	0.3	0.71	1.5	170.00
300.0	0.16	294.61	300.0	-1.4	-1.5	0.2	0.30	1.5	171.10
400.0	0.25	331.46	400.0	-1.2	-1.2	0.0	0.16	1.2	180.18
500.0	1.30	303.81	500.0	-0.4	-0.4	-1.1	1.08	1.1	250.17
600.0	1.81	302.09	599.9	1.1	1.1	-3.3	0.51	3.5	288.14
700.0	1.90	315.58	699.9	3.1	3.1	-5.8	0.44	6.6	298.11
800.0	2.06	317.35	799.8	5.5	5.6	-8.2	0.17	9.9	304.40
900.0	1.88	313.57	899.8	8.0	8.1	-10.6	0.22	13.3	307.26
1000.0	2.04	317.90	999.7	10.4	10.5	-13.0	0.22	16.7	309.00
1100.0	2.12	318.66	1099.6	13.1	13.2	-15.4	0.08	20.3	310.65
1200.0	1.83	316.96	1199.6	15.6	15.8	-17.7	0.30	23.7	311.70
1300.0	1.74	315.18	1299.5	17.8	18.0	-19.9	0.11	26.8	312.21
1400.0	1.63	310.25	1399.5	19.8	20.0	-22.0	0.18	29.8	312.27
1500.0	1.31	289.12	1499.5	21.1	21.3	-24.2	0.62	32.3	311.38
1600.0	1.16	268.13	1599.4	21.4	21.7	-26.3	0.47	34.1	309.48
1700.0	1.17	253.74	1699.4	21.1	21.3	-28.3	0.29	35.4	307.04
1800.0	1.09	253.30	1799.4	20.5	20.8	-30.2	0.08	36.6	304.56
1900.0	1.02	254.51	1899.4	20.0	20.3	-31.9	0.07	37.8	302.40
2000.0	0.64	238.88	1999.4	19.4	19.7	-33.3	0.44	38.7	300.68
2100.0	0.22	204.49	2099.4	19.0	19.3	-33.8	0.47	38.9	299.68
2200.0	0.20	45.65	2199.4	18.9	19.2	-33.8	0.41	38.9	299.64
2300.0	1.61	85.06	2299.4	19.2	19.5	-32.3	1.46	37.7	301.11
2400.0	2.59	92.71	2399.3	19.2	19.5	-28.6	1.02	34.6	304.26
2500.0	2.68	96.40	2499.2	18.9	19.1	-24.0	0.19	30.7	308.51
2600.0	4.06	106.95	2599.0	17.7	17.8	-18.3	1.51	25.6	314.22
2700.0	5.60	108.83	2698.7	15.1	15.2	-10.3	1.55	18.4	325.87
2800.0	5.62	108.48	2798.2	12.1	12.1	-1.1	0.04	12.1	355.01
2900.0	4.43	110.11	2897.8	9.3	9.2	7.2	1.20	11.7	38.06
3000.0	3.55	106.36	2997.5	7.1	7.0	13.8	0.92	15.5	63.07
3100.0	3.40	105.82	3097.4	5.5	5.3	19.6	0.15	20.3	74.80
3200.0	3.16	105.26	3197.2	4.0	3.8	25.1	0.24	25.4	81.41
3300.0	2.93	106.76	3297.1	2.6	2.3	30.3	0.24	30.3	85.58
3400.0	2.55	106.63	3396.9	1.3	1.0	34.8	0.38	34.8	88.41
3500.0	2.48	108.35	3496.8	0.0	-0.4	39.0	0.10	39.0	90.52
3600.0	2.04	110.38	3596.8	-1.3	-1.7	42.7	0.45	42.8	92.22
3700.0	1.95	109.06	3696.7	-2.4	-2.8	46.0	0.10	46.1	93.52
3800.0	1.57	111.16	3796.7	-3.4	-3.9	48.9	0.39	49.1	94.54
3900.0	1.21	114.29	3896.6	-4.3	-4.8	51.1	0.37	51.4	95.37
4000.0	1.24	114.87	3996.6	-5.2	-5.7	53.1	0.03	53.4	96.13
4100.0	0.98	109.03	4096.6	-5.9	-6.4	54.9	0.28	55.3	96.68
4200.0	0.81	101.85	4196.6	-6.3	-6.9	56.4	0.20	56.8	96.93
4300.0	0.71	96.99	4296.6	-6.5	-7.1	57.7	0.12	58.1	96.99
4400.0	0.59	91.65	4396.6	-6.6	-7.2	58.8	0.13	59.2	96.95
4500.0	0.30	74.98	4496.6	-6.6	-7.1	59.6	0.31	60.0	96.81
4600.0	0.06	317.93	4596.6	-6.5	-7.0	59.8	0.33	60.2	96.68
4700.0	0.10	305.89	4696.6	-6.4	-6.9	59.7	0.04	60.1	96.61
4800.0	0.11	236.12	4796.6	-6.4	-6.9	59.5	0.12	59.9	96.63



Scientific
Drilling

Scientific Drilling International, Inc.

Survey Report

Company: DEVON ENERGY
Field: Willow Lake
Site: Eddy County, NM
Well: Cooter 16 State #1H
Wellpath: VH - Job #32K0410270

Date: 4/22/2010 Time: 11:33:39 Page: 2
Co-ordinate(NE) Reference: Site: Eddy County, NM, Grid North
Vertical (TVD) Reference: SITE 0.0
Section (VS) Reference: Well (0.00N,0.00E,0.53Azi)
Survey Calculation Method: Minimum Curvature Db: Sybase

Survey

MD ft	Incl deg	Azim deg	TVD ft	VS ft	N/S ft	E/W ft	DLS deg/100ft	ClsD ft	ClsA deg
4900.0	0.32	266.98	4896.6	-6.4	-7.0	59.2	0.23	59.6	96.73
5000.0	0.40	237.98	4996.6	-6.6	-7.2	58.6	0.20	59.0	96.99
5100.0	0.17	241.36	5096.6	-6.9	-7.4	58.2	0.23	58.7	97.29
5200.0	0.45	191.31	5196.6	-7.4	-7.9	58.0	0.36	58.5	97.76
5300.0	0.56	200.42	5296.5	-8.2	-8.7	57.7	0.14	58.4	98.61
5400.0	0.70	212.36	5396.5	-9.2	-9.7	57.2	0.19	58.0	99.64
5500.0	1.02	219.23	5496.5	-10.4	-10.9	56.3	0.34	57.4	100.97
5600.0	1.18	227.84	5596.5	-11.8	-12.3	55.0	0.23	56.4	102.61
5700.0	1.11	229.02	5696.5	-13.1	-13.6	53.5	0.07	55.2	104.29
5800.0	1.11	231.90	5796.5	-14.4	-14.9	52.0	0.06	54.1	105.94
5900.0	0.95	240.46	5896.5	-15.4	-15.9	50.5	0.22	53.0	107.43
5920.0	1.08	221.37	5916.5	-15.6	-16.1	50.3	1.80	52.8	107.75




Scientific
Drilling

Field: Willow Lake
Site: Eddy County, NM
Well: Cooter 16 State #1H
Survey: 04/18/10



Azimuths to Grid North
True North: 0.00°
Magnetic North: 0.00°
Magnetic Field
Dip Angle: 0.00°
Date: 4/22/2010
Model: igrf2000

South(-)/North(+) [20ft/in]

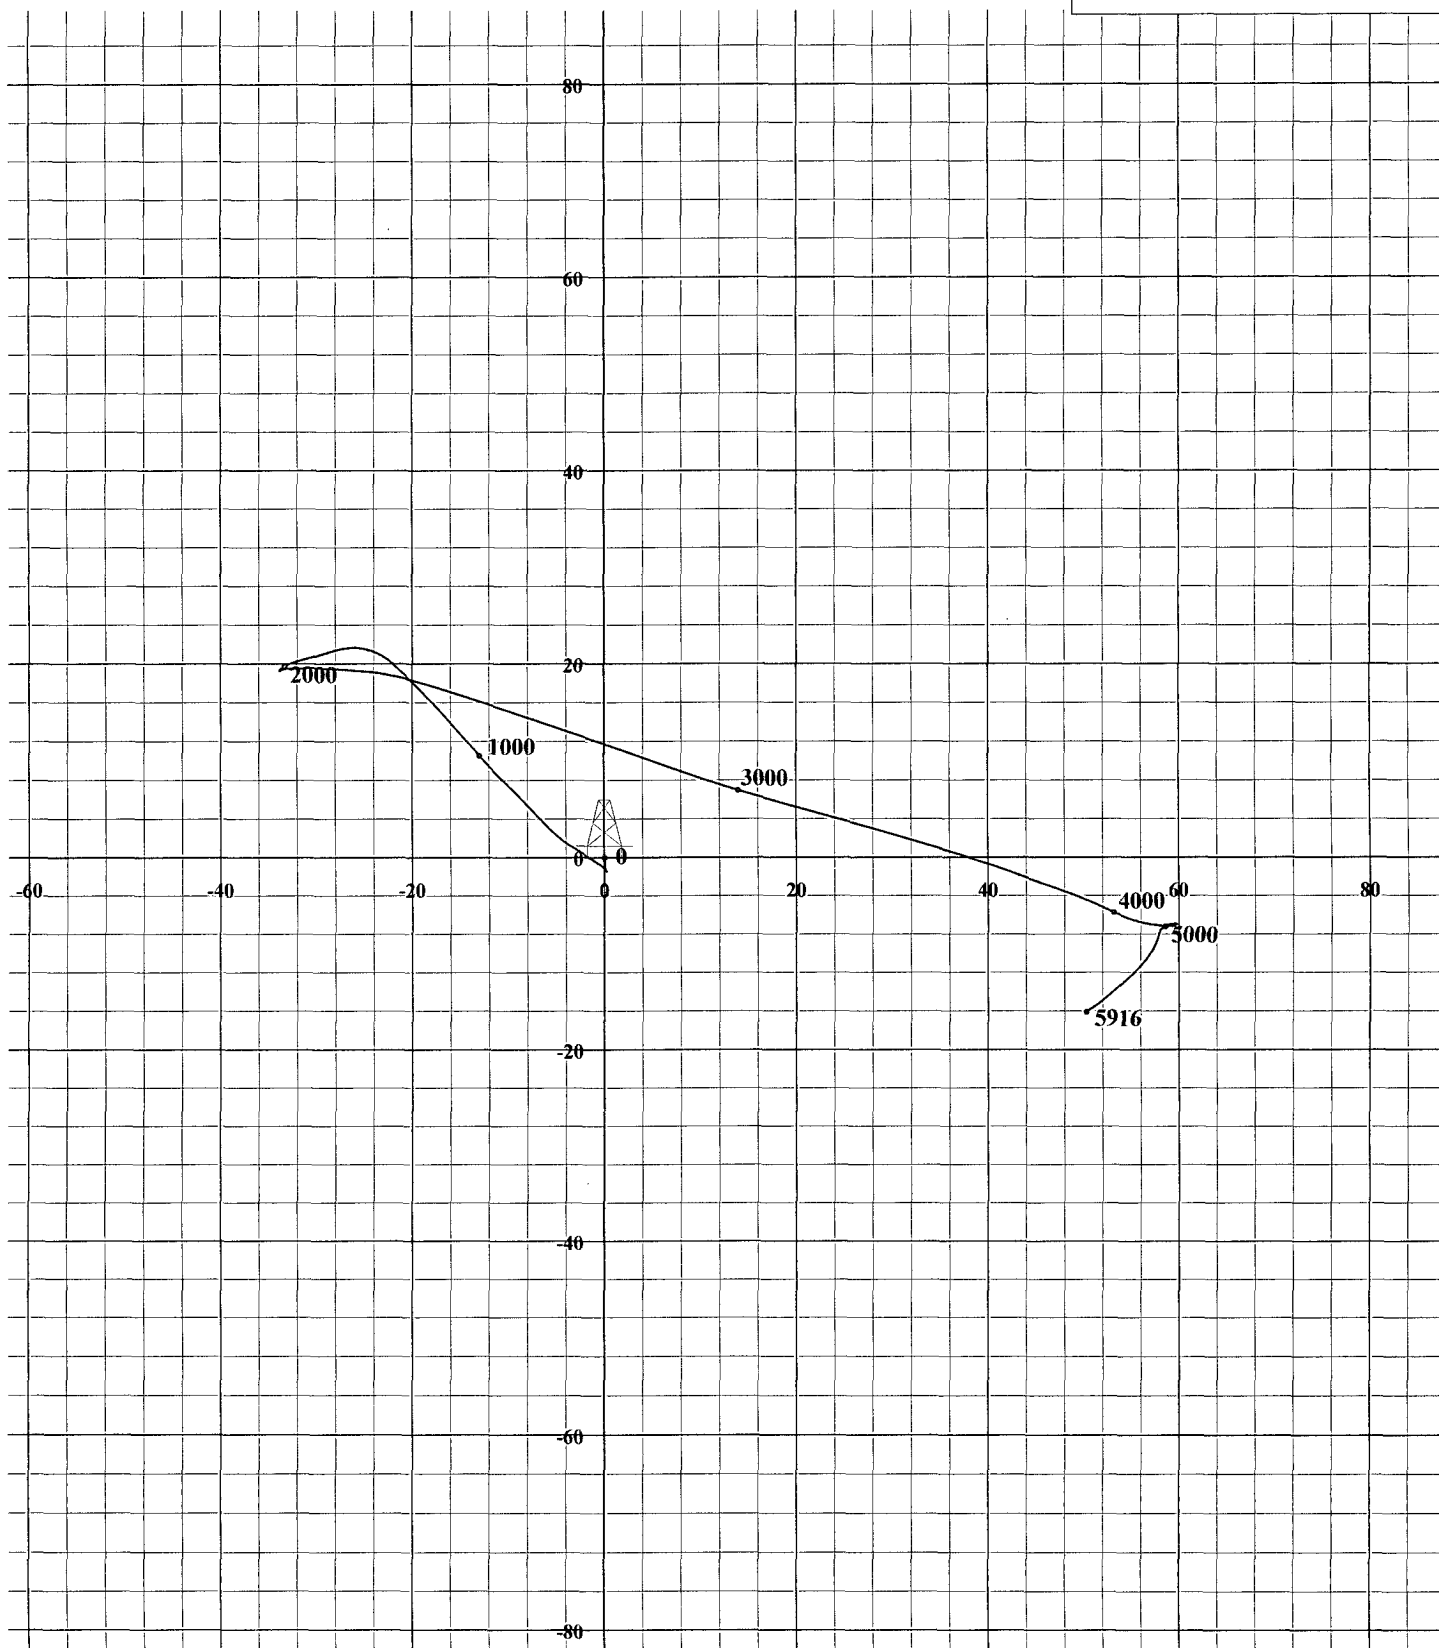

West(-)/East(+) [20ft/in]



COOTER 16 STATE #1H
EDDY CO., NEW MEXICO

Rig H&P 214



KB ELEV: 3025
GL ELEV: 3000

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	5920.00	1.08	221.37	5916.45	-16.07	50.26	0.00	0.00	-15.61	
2	5956.00	0.00	0.00	5952.45	-16.32	50.04	3.00	180.00	-15.86	
3	6670.23	0.00	0.00	6666.68	-16.32	50.04	0.00	0.00	-15.86	
4	7220.23	55.00	2.70	7136.02	227.73	61.54	10.00	2.70	228.29	
5	7571.38	90.00	359.66	7240.00	557.35	67.45	10.00	-5.30	557.95	
6	11664.70	90.00	359.66	7240.00	4650.59	42.95	0.00	0.00	4650.79	Pbhl #1

WELL DETAILS

Name	+N/-S	+E/-W	North	East	Latitude	Longitude	Slot
#1H	0.00	0.00	408879.98	646719.12	32°07'25.069N	103°59'34.537W	N/A

TARGET DETAILS


Name	Pbhl #1	TVD	+N/-S	+E/-W	North	East	Shape
		7240.00	4650.59	42.95	413530.58	646762.07	Point

FIELD DETAILS

Eddy Co., NM (NAD 83)
Geodetic System: US State Plane Coordinate System 1983
Ellipsoid: GRS 1980
Zone: New Mexico, Eastern Zone
Magnetic Model: IGRF2010
System Datum: Mean Sea Level
Local North: Grid North

SITE DETAILS

Cooter 16 State #1H
Site Centre Northing: 408879.98
Easting: 646719.12
Ground Level: 30000.00
Positional Uncertainty: 0.00
Convergence: 0.18




Azimuths to Grid North
True North: -0.18°
Magnetic North: 7.74°
Magnetic Field
Strength: 48652nT
Dip Angle: 60.05°
Date: 4/8/2010
Model: IGRF2010

Total Correction to Grid North: 7.74°

LEGEND

- #1H, Plan #4
- #1H, 1.0m
- Wt Svy

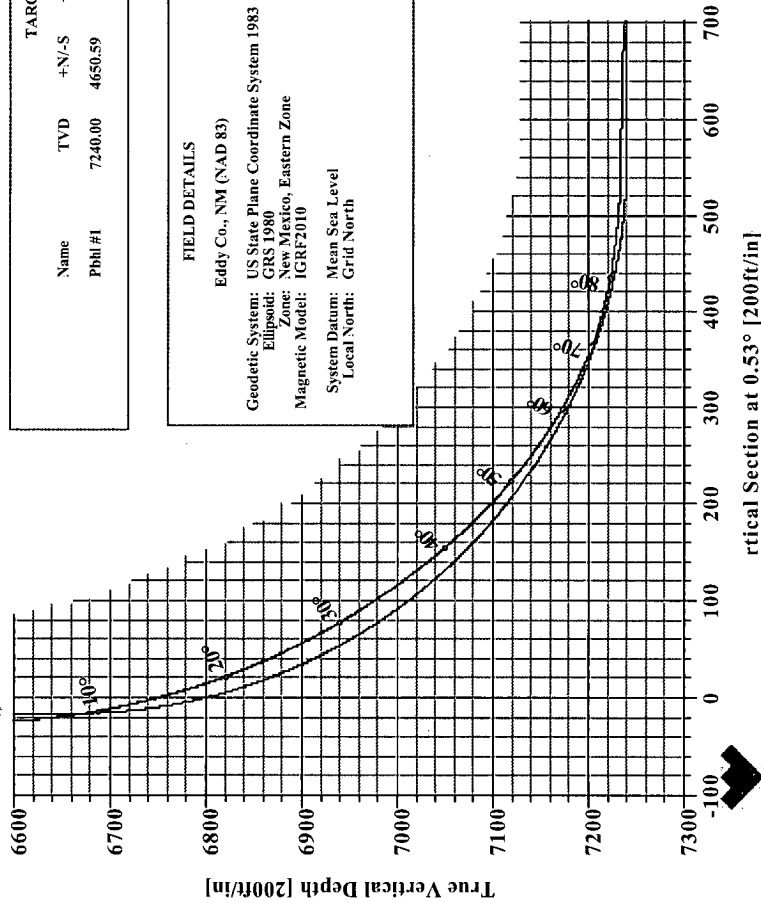


Vertical Section at 0.53° [200ft/in]



Survey: Wt Svy (#1H/1)

No	MD	Inc	Az	TVD	+N/-S	+E/-W	DLeg	TFace	VSec
96	11650.00	90.37	5.22	7257.36	4641.26	68.82	0.00	0.00	4641.70

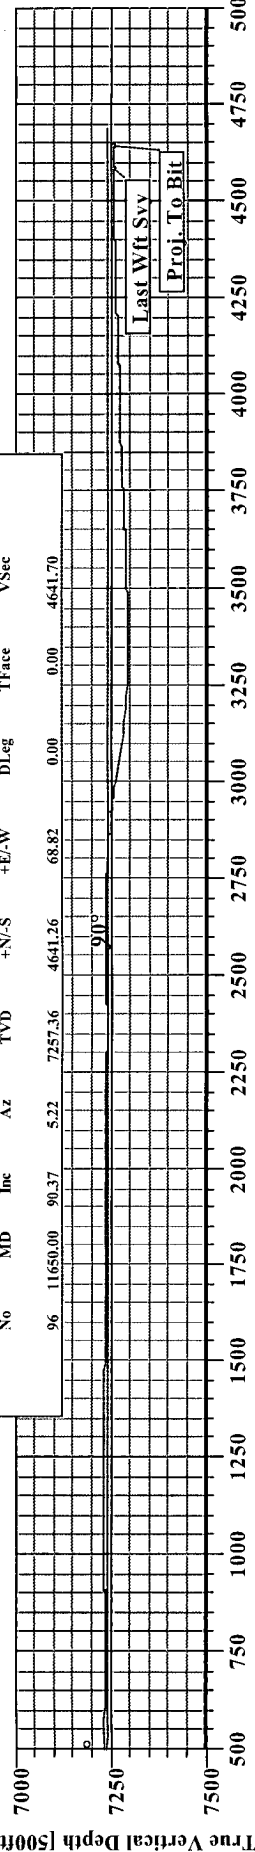

West(-)/East(+) [1000ft/in]

South(-)/North(+) [1000ft/in]

Proj. To Bit
4641.26 N
68.82 E

SHL
X=646719.12
Y=408879.98
330' FSL
1580' FWL

Last Wft Svy
First Wft Svy
Tie On SDI
330' Hardline
Lease Line

Last Wft Svy
Proj. To Bit

Vertical Section at 0.53° [500ft/in]

Survey: Wt Svy (#1H/1)

Created By: Russell W Joyner

Date: 5/3/2010



Weatherford International Ltd.

WFT Survey Report X & Y's

**Weatherford**

Company: Devon Energy	Date: 5/3/2010	Time: 07:39:33	Page: 1
Field: Eddy Co., NM (NAD 83)	Co-ordinate(NE) Reference: Well: #1H, Grid North		
Site: Cooter 16 State #1H	Vertical (TVD) Reference: SITE 3025.0		
Well: #1H	Section (VS) Reference: Well (0.00N;0.00E;0.53Azi)		
Wellpath: 1	Survey Calculation Method: Minimum Curvature	Db: Sybase	

Survey: Wft Svy	Start Date: 4/19/2010
Company: Weatherford International Ltd.	Engineer: Russell W Joyner
Tool: MWD;MWD - Standard	Tied-to: User Defined

Field: Eddy Co., NM (NAD 83)

Map System: US State Plane Coordinate System 1983	Map Zone: New Mexico, Eastern Zone
Geo Datum: GRS 1980	Coordinate System: Well Centre
Sys Datum: Mean Sea Level	Geomagnetic Model: IGRF2010

Site: Cooter 16 State #1H

Site Position:	Northing: 408879.98 ft	Latitude: 32 7 25.069 N
From: Map	Easting: 646719.12 ft	Longitude: 103 59 34.537 W
Position Uncertainty: 0.00 ft		North Reference: Grid
Ground Level: 30000.00 ft		Grid Convergence: 0.18 deg

Well: #1H	Slot Name:	
Well Position: +N/-S 0.00 ft	Northing: 408879.98 ft	Latitude: 32 7 25.069 N
+E/-W 0.00 ft	Easting: 646719.12 ft	Longitude: 103 59 34.537 W
Position Uncertainty: 0.00 ft		

Wellpath: 1	Drilled From: Surface	
	Tie-on Depth: 0.00 ft	
Current Datum: SITE	Above System Datum: Mean Sea Level	
Magnetic Data: 4/8/2010	Declination: 7.92 deg	
Field Strength: 48652 nT	Mag Dip Angle: 60.05 deg	
Vertical Section: Depth From (TVD)	+E/-W	Direction
ft	ft	deg
0.00	0.00	0.53

Survey

MD	Incl	Azim	TVD	N/S	E/W	DLS	VS	MapN	MapE	Comment
ft	deg	deg	ft	ft	ft	deg/100ft	ft	ft	ft	
5920.00	1.08	221.37	5916.45	-16.07	50.26	0.00	-15.61	408863.91	646769.38	Tie On SDI First Wft Svy
5983.00	0.99	223.58	5979.44	-16.91	49.49	0.16	-16.45	408863.07	646768.61	
6078.00	0.87	222.02	6074.43	-18.04	48.44	0.13	-17.59	408861.94	646767.56	
6172.00	0.83	209.90	6168.42	-19.16	47.63	0.20	-18.72	408860.82	646766.75	
6266.00	0.95	199.32	6262.41	-20.49	47.03	0.22	-20.05	408859.50	646766.15	
6360.00	1.04	171.56	6356.40	-22.07	46.90	0.52	-21.63	408857.92	646766.02	
6455.00	1.10	198.25	6451.38	-23.78	46.74	0.52	-23.35	408856.20	646765.86	
6549.00	0.63	226.21	6545.37	-25.00	46.08	0.66	-24.57	408854.98	646765.20	
6564.00	0.55	286.19	6560.37	-25.04	45.95	3.96	-24.61	408854.95	646765.07	
6580.00	1.40	325.44	6576.37	-24.85	45.77	6.46	-24.43	408855.13	646764.89	
6612.00	3.52	340.86	6608.34	-23.60	45.23	6.88	-23.18	408856.38	646764.34	
6643.00	5.87	346.53	6639.23	-21.16	44.54	7.72	-20.75	408858.82	646763.66	
6674.00	8.93	353.43	6669.97	-17.23	43.90	10.26	-16.82	408862.75	646763.02	
6706.00	10.85	0.57	6701.49	-11.75	43.64	7.11	-11.35	408868.23	646762.76	
6737.00	13.12	6.09	6731.82	-5.33	44.05	8.20	-4.93	408874.65	646763.17	
6769.00	15.37	3.11	6762.83	2.51	44.66	7.39	2.93	408882.50	646763.78	
6800.00	17.39	358.81	6792.57	11.25	44.79	7.60	11.66	408891.23	646763.91	
6832.00	20.27	357.74	6822.86	21.57	44.47	9.06	21.98	408901.55	646763.59	
6863.00	22.86	0.60	6851.68	32.96	44.32	9.01	33.37	408912.94	646763.44	
6894.00	24.92	3.48	6880.03	45.50	44.78	7.63	45.91	408925.48	646763.90	
6926.00	27.17	3.72	6908.78	59.52	45.67	7.04	59.94	408939.51	646764.78	
6957.00	29.71	3.35	6936.03	74.26	46.57	8.21	74.69	408954.24	646765.69	
6989.00	32.06	3.27	6963.49	90.66	47.52	7.34	91.09	408970.64	646766.64	
7020.00	34.48	3.98	6989.41	107.63	48.60	7.91	108.07	408987.61	646767.72	



Weatherford International Ltd.

WFT Survey Report X & Y's

**Weatherford**

Company:	Devon Energy	Date:	5/3/2010	Time:	07:39:33	Page:	2
Field:	Eddy Co., NM (NAD 83)	Co-ordinate(NE) Reference:	Well: #1H, Grid North				
Site:	Cooter 16 State #1H	Vertical (TVD) Reference:	SITE 3025.0				
Well:	#1H	Section (VS) Reference:	Well (0.00N,0.00E,0.53Azi)				
Wellpath:	1	Survey Calculation Method:	Minimum Curvature			Db:	Sybase

Survey

MD ft	Incl deg	Azim deg	TVD ft	N/S ft	E/W ft	DLS deg/100ft	VS ft	MapN ft	MapE ft	Comment
7051.00	36.70	2.99	7014.62	125.63	49.69	7.40	126.09	409005.61	646768.81	
7083.00	39.19	1.46	7039.85	145.29	50.45	8.32	145.75	409025.27	646769.57	
7114.00	41.25	358.86	7063.52	165.31	50.50	8.57	165.76	409045.29	646769.61	
7145.00	44.74	0.79	7086.19	186.44	50.44	12.03	186.90	409066.42	646769.56	
7208.00	51.45	3.05	7128.25	233.27	52.06	10.98	233.74	409113.25	646771.18	
7240.00	54.69	4.00	7147.48	258.79	53.64	10.40	259.28	409138.78	646772.76	
7271.00	58.27	5.23	7164.59	284.55	55.72	12.01	285.05	409164.53	646774.84	
7302.00	61.75	5.36	7180.09	311.28	58.20	11.23	311.80	409191.26	646777.32	
7334.00	65.91	4.50	7194.20	339.89	60.66	13.22	340.43	409219.87	646779.78	
7365.00	70.60	3.41	7205.68	368.60	62.65	15.48	369.17	409248.59	646781.76	
7380.00	72.59	2.79	7210.41	382.82	63.41	13.83	383.39	409262.80	646782.53	
7419.00	77.97	2.01	7220.32	420.49	64.99	13.93	421.07	409300.47	646784.11	
7440.00	81.06	2.38	7224.14	441.12	65.78	14.82	441.71	409321.10	646784.90	
7451.00	81.58	2.07	7225.80	451.99	66.20	5.49	452.58	409331.97	646785.32	
7482.00	83.83	1.33	7229.74	482.72	67.12	7.63	483.32	409362.70	646786.23	
7514.00	86.54	359.31	7232.42	514.60	67.29	10.55	515.20	409394.58	646786.41	
7545.00	89.17	0.42	7233.58	545.58	67.22	9.21	546.17	409425.56	646786.34	
7576.00	88.88	359.55	7234.11	576.57	67.21	2.96	577.17	409456.55	646786.33	
7608.00	88.20	358.72	7234.93	608.56	66.73	3.35	609.15	409488.54	646785.85	
7702.00	89.34	357.68	7236.94	702.49	63.78	1.64	703.05	409582.47	646782.90	
7796.00	90.60	356.92	7236.99	796.38	59.35	1.57	796.89	409676.36	646778.47	
7890.00	92.03	0.35	7234.83	890.31	57.11	3.95	890.80	409770.29	646776.23	
7985.00	89.63	1.83	7233.46	985.27	58.92	2.97	985.78	409865.26	646778.04	
8079.00	90.54	2.88	7233.32	1079.19	62.78	1.48	1079.73	409959.17	646781.90	
8173.00	90.49	1.62	7232.47	1173.11	66.47	1.34	1173.68	410053.10	646785.59	
8267.00	91.34	1.74	7230.97	1267.06	69.22	0.91	1267.65	410147.04	646788.34	
8361.00	88.48	359.83	7231.12	1361.04	70.51	3.66	1361.63	410241.02	646789.63	
8456.00	88.66	358.68	7233.49	1456.00	69.28	1.22	1456.58	410335.98	646788.40	
8550.00	88.54	359.12	7235.79	1549.95	67.47	0.49	1550.51	410429.94	646786.59	
8644.00	90.83	359.69	7236.31	1643.94	66.50	2.51	1644.48	410523.92	646785.62	
8738.00	89.74	358.07	7235.84	1737.92	64.66	2.08	1738.44	410617.90	646783.78	
8833.00	89.17	356.82	7236.74	1832.82	60.43	1.45	1833.30	410712.80	646779.54	
8927.00	88.89	356.34	7238.33	1926.63	54.82	0.59	1927.06	410806.62	646773.94	
9021.00	90.71	358.73	7238.66	2020.54	50.78	3.20	2020.92	410900.52	646769.90	
9115.00	90.83	0.02	7237.40	2114.52	49.75	1.38	2114.89	410994.50	646768.87	
9210.00	88.83	0.15	7237.68	2209.51	49.89	2.11	2209.88	411089.50	646769.01	
9304.00	88.94	0.13	7239.51	2303.50	50.12	0.12	2303.86	411183.48	646769.24	
9387.00	90.49	359.18	7239.92	2386.49	49.62	2.19	2386.85	411266.47	646768.74	
9399.00	90.26	358.58	7239.84	2398.49	49.39	5.35	2398.84	411278.47	646768.51	
9493.00	92.26	358.69	7237.78	2492.43	47.15	2.13	2492.76	411372.42	646766.27	
9587.00	89.97	359.45	7235.95	2586.40	45.62	2.57	2586.71	411466.38	646764.74	
9682.00	88.60	358.88	7237.13	2681.38	44.24	1.56	2681.67	411561.36	646763.36	
9776.00	87.80	358.25	7240.08	2775.30	41.89	1.08	2775.57	411655.28	646761.01	
9870.00	86.02	359.80	7245.15	2869.14	40.29	2.51	2869.39	411749.12	646759.41	
9964.00	80.43	357.62	7256.24	2962.42	38.20	6.38	2962.65	411842.40	646757.32	
9987.00	79.56	354.93	7260.23	2985.02	36.73	12.12	2985.23	411865.00	646755.85	
10004.00	79.51	353.92	7263.32	3001.66	35.10	5.85	3001.85	411881.64	646754.22	
10035.00	80.07	354.48	7268.82	3032.01	32.02	2.53	3032.18	411911.99	646751.14	
10066.00	80.89	354.82	7273.94	3062.45	29.17	2.86	3062.59	411942.43	646748.29	
10098.00	81.83	354.55	7278.75	3093.95	26.24	3.05	3094.06	411973.93	646745.36	
10129.00	83.09	355.10	7282.82	3124.56	23.47	4.43	3124.64	412004.54	646742.59	
10161.00	84.42	354.77	7286.30	3156.24	20.66	4.28	3156.30	412036.22	646739.78	



Weatherford International Ltd.

WFT Survey Report X & Y's

**Weatherford**

Company: Devon Energy	Date: 5/3/2010	Time: 07:39:33	Page: 3
Field: Eddy Co., NM (NAD 83)	Co-ordinate(NE) Reference: Well: #1H, Grid North		
Site: Cooter 16 State #1H	Vertical (TVD) Reference: SITE 3025.0		
Well: #1H	Section (VS) Reference: Well (0.00N,0.00E,0.53Azi)		
Wellpath: 1	Survey Calculation Method: Minimum Curvature	Db: Sybase	

Survey

MD ft	Incl deg	Azim deg	TVD ft	N/S ft	E/W ft	DLS deg/100ft	VS ft	MapN ft	MapE ft	Comment
10192.00	85.34	354.44	7289.07	3186.98	17.76	3.15	3187.01	412066.96	646736.88	
10224.00	86.42	354.11	7291.37	3218.74	14.57	3.53	3218.74	412098.72	646733.69	
10255.00	87.68	354.55	7292.96	3249.55	11.51	4.30	3249.51	412129.53	646730.63	
10286.00	88.48	355.54	7294.00	3280.41	8.84	4.10	3280.35	412160.39	646727.96	
10318.00	89.63	357.06	7294.53	3312.34	6.77	5.96	3312.26	412192.32	646725.89	
10412.00	91.34	358.95	7293.73	3406.27	3.50	2.71	3406.16	412286.25	646722.62	
10506.00	91.23	359.93	7291.62	3500.24	2.58	1.05	3500.12	412380.22	646721.70	
10601.00	92.14	359.16	7288.83	3595.20	1.83	1.25	3595.06	412475.18	646720.95	
10695.00	92.89	1.87	7284.71	3689.09	2.67	2.99	3688.96	412569.07	646721.79	
10789.00	92.72	3.44	7280.10	3782.88	7.02	1.68	3782.78	412662.86	646726.14	
10883.00	92.31	4.01	7275.98	3876.59	13.12	0.75	3876.54	412756.57	646732.24	
10977.00	91.06	4.49	7273.22	3970.28	20.09	1.42	3970.30	412850.27	646739.20	
11071.00	91.34	3.98	7271.25	4064.01	27.03	0.62	4064.08	412943.99	646746.14	
11165.00	93.00	4.04	7267.69	4157.71	33.59	1.77	4157.84	413037.69	646752.71	
11260.00	90.77	3.62	7264.56	4252.44	39.94	2.39	4252.62	413132.42	646759.05	
11354.00	92.20	3.59	7262.13	4346.22	45.84	1.52	4346.45	413226.20	646764.96	
11448.00	90.77	3.95	7259.69	4439.98	52.02	1.57	4440.27	413319.96	646771.14	
11542.00	90.94	4.78	7258.29	4533.70	59.18	0.90	4534.05	413413.68	646778.30	
11589.00	90.37	5.22	7257.75	4580.51	63.27	1.53	4580.90	413460.50	646782.39	Last Wft Svy
11650.00	90.37	5.22	7257.36	4641.26	68.82	0.00	4641.70	413521.24	646787.94	Proj. To Bit

Annotation

MD ft	TVD ft	
5920.00	5916.45	Tie On SDI
5983.00	5979.44	First Wft Svy
11589.00	7257.75	Last Wft Svy
11650.00	7257.36	Proj. To Bit