

Submit 3 Copies To Appropriate District
Office
District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM
87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
May 27, 2004

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-015-22809
5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
6. State Oil & Gas Lease No.


SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		7. Lease Name or Unit Agreement Name Parkway 'A' State Com
1. Type of Well: Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/>		8. Well Number 001
2. Name of Operator Cimarex Energy Co. of Colorado		9. OGRID Number 162683
3. Address of Operator 600 N. Marienfeld St., Ste. 600; Midland, TX 79701		10. Pool name or Wildcat Morrow
4. Well Location SHL Unit Letter <u>H</u> : <u>1980</u> feet from the <u>North</u> line and <u>990</u> feet from the <u>East</u> line Section <u>15</u> Township <u>19S</u> Range <u>29E</u> NMPM County <u>Eddy</u>		
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3352 GR		
Pit or Below-grade Tank Application <input type="checkbox"/> or Closure <input type="checkbox"/>		
Pit type _____ Depth to Groundwater _____ Distance from nearest fresh water well _____ Distance from nearest surface water _____		
Pit Liner Thickness: _____ Below-Grade Tank: Volume _____ bbls; Construction Material _____		

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
PERFORM REMEDIAL WORK <input type="checkbox"/>	PLUG AND ABANDON <input type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
TEMPORARILY ABANDON <input checked="" type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>	COMMENCE DRILLING OPNS <input type="checkbox"/>	P AND A <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	MULTIPLE COMPL <input type="checkbox"/>	CASING/CEMENT JOB <input type="checkbox"/>	
OTHER: <input type="checkbox"/>		OTHER: <input type="checkbox"/>	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

- MIRU pulling unit, ND WH NU BOP, Release packer, TOO H w/Tubing
- Run CIBP @ 10,700 w/35' cement, existing CIBP @ 11,150 w/35' cement
- TIH, circulate hole w/ Corrosion inhibiting fluid
- ND BOP & NU WH Run MIT
- RD and release WSU



Notify OCD 24 hrs . prior to
any work done.

Please see attached WBD and detailed TA procedure. Request TA wellbore for pending Strawn Recompletion.

LAST PREP 4/1/09

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☐, a general permit ☐ or an (attached) alternative OCD-approved plan ☐.

SIGNATURE Brett Jennings TITLE Regulatory Analyst DATE March 16, 2011

Type or print name Brett Jennings email address: bajennings@cimarex.com Telephone No. 432-620-1932

For State Use Only

APPROVED BY: Brett Jennings TITLE COMPLIANCE OFFICER DATE 3/30/11

Conditions of Approval (if any):

**PARKWAY "A" STATE COM #1
TEMPORARY ABANDONMENT PROCEDURE**

API # 30-015-22809

1980' FNL & 990' FEL

Section 15, T-19-S, R-29-E

Eddy County, New Mexico

February 26, 2011

GL : 3324'
KB : 3342'
TD : 11,740"
PBD: 8182'
SURF CSG : 11-3/4" OD 48#/FT H-42 @ 250' 250 SX CMT – CIRC TO SURFACE
INTER CSG: 8-5/8" OD 24#/FT S-80 & K-55 @ 2832' CMT CIRC TO SURFACE – 2600 SX
PROD CSG : 4-1/2" OD 11.6#/FT S-95/N-80/J-55 @ 11,740' CMT W/ 1300 SX – TOC @ 7030',
CIBP: 11,150'
PERFS: MORROW: 11,177 – 11,185', (BELOW CIBP)
 ATOKA: 10,758 – 10,770' (OPEN)
TUBING: 345 JTS 2-3/8" N-80 TUBING & GUIBERSON UNI-VI PACKER @ 10,370'

TA WELLBORE FOR PENDING STRAWN RECOMPLETION

1. **NOTIFY NMOCD 24 HRS PRIOR TO INITIATION OF OPERATIONS.**
2. MI RU WSU. RU REQUIRED SAFETY EQUIPMENT.
3. KILL WELL IF NECESSARY. ND WELLHEAD AND NU 5K HYDRAULIC BOPS. RELEASE GUIBERSON UNI-VI PACKER AND TOOHP WITH 2-3/8" TUBING. LD BHA.
4. RU WIRELINE & MAKE GAUGE RING RUN TO CIBP @ 11,150'. RU DUMP BAILER & CAP EXISTING CIBP @ 11,150' WITH 35' CEMENT. TIH AND SET CIBP @ 10,700' (ABOVE ATOKA PERFS) AND CAP WITH 35' CEMENT.
5. TIH WITH TUBING OPEN ENDED & CIRCULATE HOLE W/**CORROSION INHIBITING PACKER FLUID**. CIRCULATE ALL WELL FLUIDS INTO VACUUM TRUCK FOR DISPOSAL.
6. ND BOPS AND NU WELLHEAD. RUN MANDATED MECHANICAL INTEGRITY TEST TO 500 PSI/30 MIN OR AS DIRECTED BY OCD REPRESENTATIVE. **SEND CHARTS TO ZENO FARRIS IN CIMAREX MIDLAND OFFICE WITH FULL DESCRIPTION OF FLUIDS USED TO CIRCULATE WELL BORE.**
7. RELEASE ALL RENTAL EQUIPMENT. RD AND RELEASE WSU.
8. SEND REMAINING 2-3/8" TUBING AND ANY UNUSED EQUIPMENT TO MIDLAND WAREHOUSE. NO UNUSED EQUIPMENT IS TO BE LEFT ON LOCATION. CLEAN AND BACKDRAG LOCATION. HAUL ALL TRASH TO AUTHORIZED DISPOSAL SITE.
9. TEMPORARILY ABANDON WELL PENDING RECOMPLETION EVALUATION.




11 3/4" 42# H40 csg @ 250'
Cmt w/250 sxs, circ to surface

8 5/8" 24# S80 & K55 csg @ 2832'
Cmt w/2600 sx, circ to surface

WELLSBORE CIRCULATED WITH
CORROSION INHIBITING PACKER FLUID

Atoka Perfs:
10,758'-10,770' (3/95)
Morrow Perfs:
11,177' - 11,185' (3/79)

4 1/2" 11.6# S95/N80/K55 csg @11,740'
Cmt w/1300 sx, TOC @ 7030'

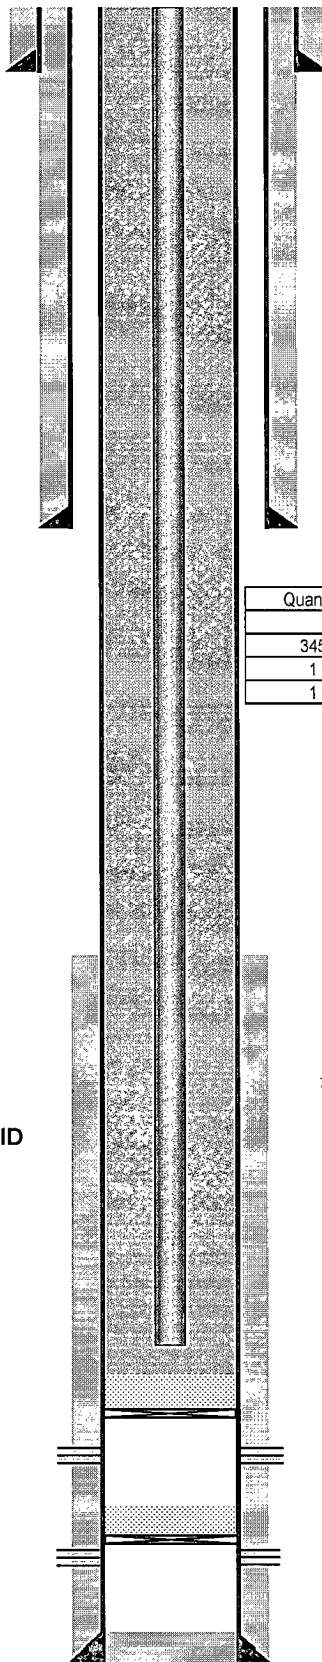

PBTD: 11,150'
TD: 11,740'

Cimarex Energy Co. of Colorado
PARKWAY A STATE COM #1

API 30-015-22809
1980' FNL & 990' FEL, Sec 15, T19S R29E
Eddy County, NM
GL: 3324' KB: 3342'
PROPOSED TA

15" hole to 252'

11" hole to 2832'

Quantity	Description	Length	Setting Depth
345	2 3/8" 4.7# N80	10350.00	10368.00
1	Guiberson XL on/off tool w/1.81 "R"	2.00	10370.00
1	Profile Guiberson Uni-Vi Packer	2.00	10372.00

TOC 4 1/2" csg @ 7030' (Temp Survey)

CIBP: 10,700' Capped w/35' Cement

CIBP: 11,150' (3/95) Capped w/35' Cement

7 7/8" hole to TD 11,740'

M. Ketter 6/26/2009