


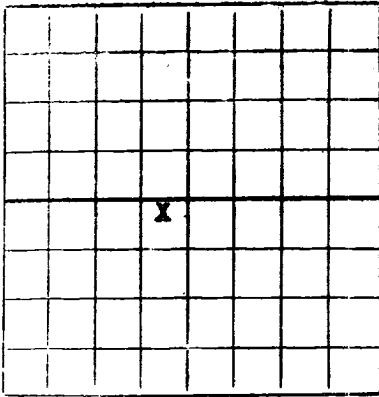

AREA 640 ACRES
 LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

MAY 17 1960

ARTIFICIAL LIFT

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPLICATE. If State Land submit 6 Copies

J. F. McAdams - Etal

Mary Ann Cannon

(Company or Operator)

(Lease)

Well No. 1, in NE 1/4 of SW 1/4 of Sec. 27, T. 10S, R. 25E, NMPM.

unamed

Chaves

County.

Well is 1980 feet from W. line and 1980 feet from S. line of Section 27.

Drilling Commenced April 19 60

Drilling was Completed April 29 60

Name of Drilling Contractor Stienburger Drilling Co.

Address Roswell, New Mexico

Elevation above sea level at Top of Tubing Head April 19 60 3488

The information given is to be kept confidential until

OIL SANDS OR ZONES

No. 1, from 872 to 910
 No. 2, from
 No. 3, from
 No. 4, from
 No. 5, from
 No. 6, from

REPORT ON WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 510 to 518
 No. 2, from
 No. 3, from
 No. 4, from

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF CEMENT	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
7"	24	Used	679.64	Larkin			
4 1/2"	11.60	New	910	HOWCO		872-903	water shut off production

CEMENT RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. BAGS OF CEMENT	KIND OF CEMENT	MUD GRAVITY	AMOUNT OF MUD USED
9 5/8	7"	679.64	210	HOWCO		
6 1/4	4 1/2"	910	50	HOWCO		

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

Circulated mud out with lease oil, spotted 200 gal. acid. Break down formation at

3200 lbs. fractured with 6000 gal. lease oil and 9000 lbs. sand, run 12

sealer balls, 500 gal. acid, follow with 6000 gal. oil and 9000 lbs sand, run 12 ball

sealers, 500 gal. acid, follow with 6000 gal. lease oil and 9000 lbs. sand.

Result of Production Stimulation Shut in 24 hrs then flowed back 300 lbs. oil, swabbed remaining load, put well on pump.

Depth Cleaned Out

1 END OF DRILL-LOG AND SURVEIL THE

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 910 feet, and from feet to feet.
Cable tools were used from feet to feet, and from feet to feet.

PRODUCTION

Put to Producing May 7, 1960

OIL WELL: The production during the first 24 hours was 60 barrels of liquid of which 100% was oil; % was condensation; % water; and % was sediment. API Gravity 24.8

GAS WELL: The production during the first 24 hours was MCF. plus barrels of Liquid Hydrocarbon. Shut in Pressure lbs.

Length of Time Shut in

PLEASE INDICATE BELOW FORMATION TESTS (ON CORRESPONDING WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico

T. Anky
T. Salt
R. Salt
T. Yates
T. 7 Rivers
T. Queen
T. Grayburg
T. San Andres 200
T. Clinton
T. Dinkard
T. Tullis
T. Alva
T. Permian
T. Miss.


T. Devonian
T. Silurian
T. Mississippian
T. Simpson
T. McKee
T. Elkburger
T. Gr. Wash.
T. Granite
T.
T.
T.
T.
T.

Northwestern New Mexico

T. Ojo Alamo
T. Kirtland-Fruitland
T. Farmington
T. Fictured Cliffs
T. Member
T. Point Lookout
T. Mancos
T. Dakota
T. Mancos
T. Permian
T.
T.
T.
T.

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0	100	70	Gypsum				
100	300	200	Red Beds				
300	500	120	Brown Anky				
500	902	402	San Andres Lime				

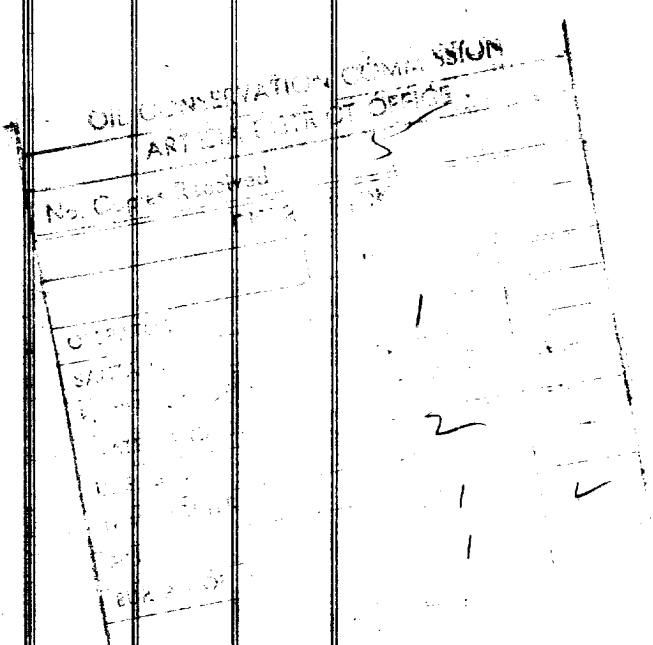

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

May 14, 1960

Company or Operator J. F. McDermott - Etal
Name J. F. McDermott

Address P.O. Box 1716 Hobbs, New Mexico
Position or Title Operator