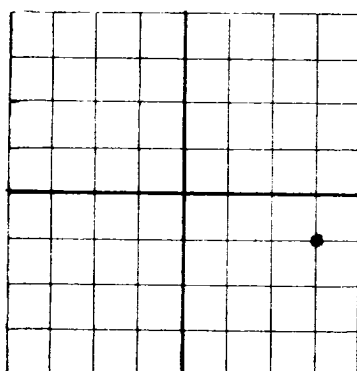


## NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

AREA 640 ACRES  
LOCATE WELL CORRECTLY

## WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE.

R.I. Willson 101 N. Lea Ave., Roswell, N.M.  
Company or Operator Address  
Brown Well No. 1 in NE 1/4 SE 1/4 of Sec. 29, T. 11S  
Lease  
R. 23E N. M. P. M., Six Mile Hill Field, Chaves County.  
Well is 3300 feet south of the North line and 660 feet west of the East line of Sec. 29, 11S, 23E  
If State land the oil and gas lease is No. \_\_\_\_\_ Assignment No. \_\_\_\_\_  
If patented land the owner is Byron O. Brown Address Roswell, N.M.  
If Government land the permittee is \_\_\_\_\_ Address \_\_\_\_\_  
The Lessee is \_\_\_\_\_ Address \_\_\_\_\_  
Drilling commenced Dec. 22 1940 Drilling was completed June 6 1941  
Name of drilling contractor R.I. Willson Address Roswell, N.M.  
Elevation above sea level at top of casing \_\_\_\_\_ feet.  
The information given is to be kept confidential until \_\_\_\_\_ 19\_\_\_\_.

## OIL SANDS OR ZONES

No. 1, from None to \_\_\_\_\_ No. 4, from \_\_\_\_\_ to \_\_\_\_\_  
No. 2, from \_\_\_\_\_ to \_\_\_\_\_ No. 5, from \_\_\_\_\_ to \_\_\_\_\_  
No. 3, from \_\_\_\_\_ to \_\_\_\_\_ No. 6, from \_\_\_\_\_ to \_\_\_\_\_

## IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 60 to 295 feet. 235 - Water stood in hole to within 200 feet of the surface.  
No. 2, from \_\_\_\_\_ to \_\_\_\_\_ feet.  
No. 3, from \_\_\_\_\_ to \_\_\_\_\_ feet.  
No. 4, from \_\_\_\_\_ to \_\_\_\_\_ feet.

## CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
10"	40#	8	Chester	298	Texas	Pulled out of hole			
8"	28#	8	"	704	"	Expect to pull			
7"	17#	10	"	1489	"	Expect to pull about 900'			

## MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
10"	8"	704'	None	Halliburton	12#	10 Tons
8"	7"	1489'	50	" "		

## PLUGS AND ADAPTERS

Heaving plug—Material \_\_\_\_\_ Length \_\_\_\_\_ Depth Set \_\_\_\_\_  
Adapters—Material \_\_\_\_\_ Size \_\_\_\_\_

## RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		None				

Results of shooting or chemical treatment \_\_\_\_\_

## RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

## TOOLS USED

Rotary tools were used from \_\_\_\_\_ feet to \_\_\_\_\_ feet, and from \_\_\_\_\_ feet to \_\_\_\_\_ feet  
Cable tools were used from 0 feet to 2000 feet, and from \_\_\_\_\_ feet to \_\_\_\_\_ feet

## PRODUCTION

Put to producing None 19\_\_\_\_  
The production of the first 24 hours was \_\_\_\_\_ barrels of fluid of which \_\_\_\_\_ % was oil; \_\_\_\_\_ % emulsion; \_\_\_\_\_ % water; and \_\_\_\_\_ % sediment. Gravity, Be \_\_\_\_\_  
If gas well, cu. ft. per 24 hours \_\_\_\_\_ Gallons gasoline per 1,000 cu. ft. of gas \_\_\_\_\_  
Rock pressure, lbs. per sq. in. \_\_\_\_\_

## EMPLOYEES

R.I. Willson Driller \_\_\_\_\_ Driller \_\_\_\_\_  
Lloyd Eddings Driller \_\_\_\_\_ Driller \_\_\_\_\_

## FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 6thday of September, 1941

[Signature]  
Notary Public

My Commission expires 1-30-42

Roswell, N.M. September 6, 1941.  
Place Date

Name [Signature]

Position \_\_\_\_\_

Representing \_\_\_\_\_ Company or Operator

Address 101 N. Lea Ave., Roswell, N.M.

## FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	20		Rock & Clay
20	40		Caleche Rock
40	60		Rock Crevice
60	250		Rock Clay & Water
250	270		Gray Lime
270	285		Dark Gray Lime
285	290		" " "
290	295		Black Lime (Water)
295	668		Gray Lime (Hard & Soft Streaks)
668	704		Glorietta Sand (Water-Yellow)
704	750		Gray Lime
750	800		Gray Sandy Lime
800	805		Gray Lime
805	845		Gray Lime & Anhydrite
845	848		Salt
848	854		Gray Lime
854	1995		Gray Lime (Streaks Salt)
1995	2000 T.D.		Gray Lime (Dry Hole)