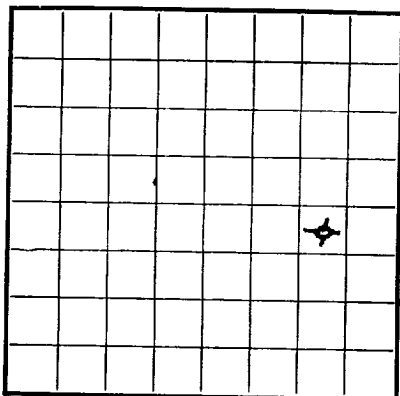


U. S. LAND OFFICE Las Cruces
SERIAL NUMBER 063841-E
LEASE OR PERMIT TO PROSPECT _____

LOCATE WELL CORRECTLY

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

LOG OF OIL OR GAS WELL

Company John H. Trigg Address P. O. Box 5629 Roswell, New Mexico
Lessor or Tract Federal Withars Lease Field Dexter San Andres State New Mexico
Well No. 2-26 Sec. 26 T. 12SR. 26 Meridian N.M.P.M. County Chaves
Location 2310 ft. N. of S. Line and 990 ft. W. of E. Line of Section 26 Elevation 3572
(Derrick floor relative to sea level)

The information given herewith is a complete and correct record of the well and all work done thereon so far as can be determined from all available records.

Signed _____

Date August 9, 1957Title Geologist

The summary on this page is for the condition of the well at above date.

Commenced drilling July 4, 1957 Finished drilling July 25, 1957

OIL OR GAS SANDS OR ZONES

(Denote gas by G)

No. 1, from _____ to _____ No. 4, from _____ to _____
No. 2, from _____ to _____ No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

No. 1, from 410 to 420 No. 3, from 534 to 545
No. 2, from 465 to 470 No. 4, from 697 to 705

515

518 CASING RECORD

940

943

Size casing	Weight per foot	Threads per inch	Make	Amount	Kind of shoe	Cut and pulled from	Perforated		Purpose
							From—	To—	
10 3/4"	42#		J-55	595	Texas Pattern	565'			Water Shut Off
8 1/2"	27#		J-55	812					
HIELOKA OE OIG OK CV2 MEIT									

MUDDING AND CEMENTING RECORD

Size casing	Where set	Number sacks of cement	Method used	Mud gravity	Amount of mud used
10 3/4"	600	Mudded			
8 5/8"	812	Mudded			

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth set _____
Adapters—Material _____ Size _____

SHOOTING RECORD

Size	Shell used	Explosive used	Quantity	Date	Depth shot	Depth cleaned out

TOOLS USED

Rotary tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet
Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet

DATES

August 9, 1957 Put Plugged & Abandoned
The production for the first 24 hours was 0 barrels of fluid of which _____% was oil; _____%
emulsion; _____% water; and _____% sediment. Gravity, °Bé. _____

If gas well, cu. ft. per 24 hours _____

Gallons gasoline per 1,000 cu. ft. of gas _____

Rock pressure, lbs. per sq. in. _____

EMPLOYEES

O. E. Wood, Driller C. H. Neel, Driller
J. C. Alexander, Driller _____, Driller


FORMATION RECORD

FROM—	TO—	TOTAL FEET	FORMATION
0	314	314	Anhydrite & red shale
314	325	11	Water Sand
325	410	85	Anhydrite & Shale
410	420	10	Sand - 7 bailers water per hour
420	465	45	Anhydrite and shale
465	470	5	Sand - hole full of water
470	500	30	Sand & Shale
	SLM	500 = 493	
493	515	23	Shale & sand
515	518	3	Sand - Increase in water
518	534	16	Shale
534	550	16	Sand - big increase in water
550	635	85	Sand & blue shale
635	660	25	Sand, streaks shells
660	697	37	Shale
697	705	8	Sand - water
705	760	55	Shale, sand, gravel, gyp
760	936	176	Sand & shale
	SLM	936 = 940	
940	943	3	Red & orange anhydrite & gyp.
943	1000	57	Anhydrite & lime
1000	1025	25	Anhydrite
1025	1060	35	Lime
1060	1075	15	Lime & anhydrite
1075	1240	165	Lime

LEASE OR PERMIT TO PROSPECT
SERIAL NUMBER
U. S. LAND OFFICE

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

LOG OF OIL OR GAS WELL

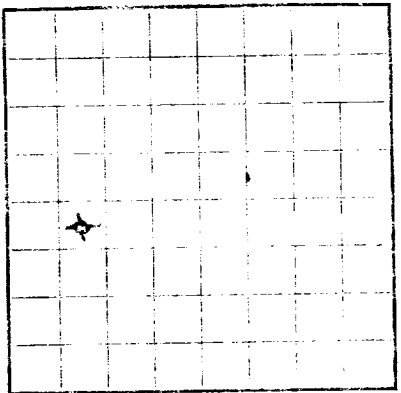

LOCATE WELL CORRECTLY

The information given herewith is a complete and correct record of the well and all work done thereon so far as can be determined from all available records.

Signed _____

Location _____ ft. ^{N.} of _____ ft. ^{E.} of _____ Line and _____ ft. ^{W.} of _____ Line of _____ Elevation _____

County _____ State _____

Lessors or Tract _____

Address _____

Company _____

Commenced drilling _____, 19____
 _____, finished drilling _____, 19____
 The summary on this page is for the condition of the well at above date.
 Date _____ Title _____

OIL OR GAS SANDS OR ZONES

(D) $\frac{1}{2} \log 2$

No. 1, from	to	No. 4, from	to
No. 2, from	to	No. 5, from	to
No. 3, from	to	No. 6, from	to

IMPORTANT WATER SANDS

No. 1, from _____ to _____
No. 2, from _____ to _____
No. 3, from _____ to _____
No. 4, from _____ to _____

CASING RECORD

Weight per foot	Threads per inch	Make	Amount	Kind of shoe	Cut and pulled from	Perforated From To	Purpose

It is of the greatest importance to have a complete history of the well. Please state in detail the dates of redrilling, together with the reasons for the work and its results. If there were any changes made in the casing, state fully, and if any casing was "sidetracked" or left in the well, give its size and location. If the well has been dynamited, give date, size, position, and number of shots. If plugs or bridges were put in to test for water, state kind of material used, position, and results of pumping or bailing.

HISTORY OF OIL OR GAS WELL

~~16-48094-8 - U. S. GOVERNMENT PRINTING OFFICE~~

MIDDING AND CEMENTING RECORD

Size Class	Where seen	Number sacks of cement	M bags used	Mud gravity	Amount of mud used
1/2"	100'	100	100	1.00	100
3/4"	100'	100	100	1.00	100
1"	100'	100	100	1.00	100
1 1/4"	100'	100	100	1.00	100
1 1/2"	100'	100	100	1.00	100
1 3/4"	100'	100	100	1.00	100
2"	100'	100	100	1.00	100
2 1/4"	100'	100	100	1.00	100
2 1/2"	100'	100	100	1.00	100
2 3/4"	100'	100	100	1.00	100
3"	100'	100	100	1.00	100
3 1/4"	100'	100	100	1.00	100
3 1/2"	100'	100	100	1.00	100
3 3/4"	100'	100	100	1.00	100
4"	100'	100	100	1.00	100
4 1/4"	100'	100	100	1.00	100
4 1/2"	100'	100	100	1.00	100
4 3/4"	100'	100	100	1.00	100
5"	100'	100	100	1.00	100
5 1/4"	100'	100	100	1.00	100
5 1/2"	100'	100	100	1.00	100
5 3/4"	100'	100	100	1.00	100
6"	100'	100	100	1.00	100
6 1/4"	100'	100	100	1.00	100
6 1/2"	100'	100	100	1.00	100
6 3/4"	100'	100	100	1.00	100
7"	100'	100	100	1.00	100
7 1/4"	100'	100	100	1.00	100
7 1/2"	100'	100	100	1.00	100
7 3/4"	100'	100	100	1.00	100
8"	100'	100	100	1.00	100
8 1/4"	100'	100	100	1.00	100
8 1/2"	100'	100	100	1.00	100
8 3/4"	100'	100	100	1.00	100
9"	100'	100	100	1.00	100
9 1/4"	100'	100	100	1.00	100
9 1/2"	100'	100	100	1.00	100
9 3/4"	100'	100	100	1.00	100
10"	100'	100	100	1.00	100
10 1/4"	100'	100	100	1.00	100
10 1/2"	100'	100	100	1.00	100
10 3/4"	100'	100	100	1.00	100
11"	100'	100	100	1.00	100
11 1/4"	100'	100	100	1.00	100
11 1/2"	100'	100	100	1.00	100
11 3/4"	100'	100	100	1.00	100
12"	100'	100	100	1.00	100
12 1/4"	100'	100	100	1.00	100
12 1/2"	100'	100	100	1.00	100
12 3/4"	100'	100	100	1.00	100
13"	100'	100	100	1.00	100
13 1/4"	100'	100	100	1.00	100
13 1/2"	100'	100	100	1.00	100
13 3/4"	100'	100	100	1.00	100
14"	100'	100	100	1.00	100
14 1/4"	100'	100	100	1.00	100
14 1/2"	100'	100	100	1.00	100
14 3/4"	100'	100	100	1.00	100
15"	100'	100	100	1.00	100
15 1/4"	100'	100	100	1.00	100
15 1/2"	100'	100	100	1.00	100
15 3/4"	100'	100	100	1.00	100
16"	100'	100	100	1.00	100
16 1/4"	100'	100	100	1.00	100
16 1/2"	100'	100	100	1.00	100
16 3/4"	100'	100	100	1.00	100
17"	100'	100	100	1.00	100
17 1/4"	100'	100	100	1.00	100
17 1/2"	100'	100	100	1.00	100
17 3/4"	100'	100	100	1.00	100
18"	100'	100	100	1.00	100
18 1/4"	100'	100	100	1.00	100
18 1/2"	100'	100	100	1.00	100
18 3/4"	100'	100	100	1.00	100
19"	100'	100	100	1.00	100
19 1/4"	100'	100	100	1.00	100
19 1/2"	100'	100	100	1.00	100
19 3/4"	100'	100	100	1.00	100
20"	100'	100	100	1.00	100
20 1/4"	100'	100	100	1.00	100
20 1/2"	100'	100	100	1.00	100
20 3/4"	100'	100	100	1.00	100
21"	100'	100	100	1.00	100
21 1/4"	100'	100	100	1.00	100
21 1/2"	100'	100	100	1.00	100
21 3/4"	100'	100	100	1.00	100
22"	100'	100	100	1.00	100
22 1/4"	100'	100	100	1.00	100
22 1/2"	100'	100	100	1.00	100
22 3/4"	100'	100	100	1.00	100
23"	100'	100	100	1.00	100
23 1/4"	100'	100	100	1.00	100
23 1/2"	100'	100	100	1.00	100
23 3/4"	100'	100	100	1.00	100
24"	100'	100	100	1.00	100
24 1/4"	100'	100	100	1.00	100
24 1/2"	100'	100	100	1.00	100
24 3/4"	100'	100	100	1.00	100
25"	100'	100	100	1.00	100
25 1/4"	100'	100	100	1.00	100
25 1/2"	100'	100	100	1.00	100
25 3/4"	100'	100	100	1.00	100
26"	100'	100	100	1.00	100
26 1/4"	100'	100	100	1.00	100
26 1/2"	100'	100	100	1.00	100
26 3/4"	100'	100	100	1.00	100
27"	100'	100	100	1.00	100
27 1/4"	100'	100	100	1.00	100
27 1/2"	100'	100	100	1.00	100
27 3/4"	100'	100	100	1.00	100
28"	100'	100	100	1.00	100
28 1/4"	100'	100	100	1.00	100
28 1/2"	100'	100	100	1.00	100
28 3/4"	100'	100	100	1.00	100
29"	100'	100	100	1.00	100
29 1/4"	100'	100	100	1.00	100
29 1/2"	100'	100	100	1.00	100
29 3/4"	100'	100	100	1.00	100
30"	100'	100	100	1.00	100
30 1/4"	100'	100	100	1.00	100
30 1/2"	100'	100	100	1.00	100
30 3/4"	100'	100	100	1.00	100
31"	100'	100	100	1.00	100
31 1/4"	100'	100	100	1.00	100
31 1/2"	100'	100	100	1.00	100
31 3/4"	100'	100	100	1.00	100
32"	100'	100	100	1.00	100
32 1/4"	100'	100	100	1.00	100
32 1/2"	100'	100	100	1.00	100
32 3/4"	100'	100	100	1.00	100
33"	100'	100	100	1.00	100
33 1/4"	100'	100	100	1.00	100
33 1/2"	100'	100	100	1.00	100
33 3/4"	100'	100	100	1.00	100
34"	100'	100	100	1.00	100
34 1/4"	100'	100	100	1.00	100
34 1/2"	100'	100	100	1.00	100
34 3/4"	100'	100	100	1.00	100
35"	100'	100	100	1.00	100
35 1/4"	100'	100	100	1.00	100
35 1/2"	100'	100	100	1.00	100
35 3/4"	100'	100	100	1.00	100
36"	100'	100	100	1.00	100
36 1/4"	100'	100	100	1.00	100
36 1/2"	100'	100	100	1.00	100
36 3/4"	100'	100	100	1.00	100
37"	100'	100	100	1.00	100
37 1/4"	100'	100	100	1.00	100
37 1/2"	100'	100	100	1.00	100
37 3/4"	100'	100	100	1.00	100
38"	100'	100	100	1.00	100
38 1/4"	100'	100	100	1.00	100
38 1/2"	100'	100	100	1.00	100
38 3/4"	100'	100	100	1.00	100
39"	100'	100	100	1.00	100
39 1/4"	100'	100	100	1.00	100
39 1/2"	100'	100	100	1.00	100
39 3/4"	100'	100	100	1.00	100
40"	100'	100	100	1.00	100
40 1/4"	100'	100	100	1.00	100
40 1/2"	100'	100	100	1.00	100
40 3/4"	100'	100	100	1.00	100
41"	100'	100	100	1.00	100
41 1/4"	100'	100	100	1.00	100
41 1/2"	100'	100	100	1.00	100
41 3/4"	100'	100	100	1.00	100
42"	100'	100	100	1.00	100
42 1/4"	100'	100	100	1.00	100
42 1/2"	100'	100	100	1.00	100
42 3/4"	100'	100	100	1.00	100
43"	100'	100	100	1.00	100
43 1/4"	100'	100	100	1.00	100
43 1/2"	100'	100	100	1.00	100
43 3/4"	100'	100	100	1.00	100
44"	100'	100	100	1.00	100
44 1/4"	100'	100	100	1.00	100
44 1/2"	100'	100	100	1.00	100
44 3/4"	100'	100	100	1.00	100
45"	100'	100	100	1.00	100
45 1/4"	100'	100	100	1.00	100
45 1/2"	100'	100	100	1.00	100
45 3/4"	100'	100	100	1.00	100
46"	100'	100	100	1.00	100
46 1/4"	100'	100	100	1.00	100
46 1/2"	100'	100	100	1.00	100
46 3/4"	100'	100	100	1.00	100
47"	100'	100	100	1.00	100
47 1/4"	100'	100	100	1.00	100
47 1/2"	100'	100	100	1.00	100
47 3/4"	100'	100	100	1.00	100
48"	100'	100	100	1.00	100
48 1/4"	100'	100	100	1.00	100
48 1/2"	100'	100	100	1.00	100
48 3/4"	100'	100	100	1.00	100
49"	100'	100	100	1.00	100
49 1/4"	100'	100	100	1.00	100
49 1/2"	100'	100	100	1.00	100
49 3/4"	100'	100	100	1.00	100
50"	100'	100	100	1.00	100
50 1/4"	100'	100	100	1.00	100
50 1/2"	100'	100	100	1.00	100
50 3/4"	100'	100	100	1.00	100
51"	100'	100	100	1.00	100
51 1/4"	100'	100	100	1.00	100
51 1/2"	100'	100	100	1.00	100
51 3/4"	100'	100	100	1.00	100
52"	100'	100	100	1.00	100
52 1/4"	100'	100	100	1.00	100
52 1/2"	100'	100	100	1.00	100
52 3/4"	100'	100	100	1.00	100
53"	100'	100	100	1.00	100
53 1/4"	100'	100	100	1.00	100
53 1/2"	100'	100	100	1.00	100
53 3/4"	100'	100	100	1.00	100
54"	100'	100	100	1.00	100
54 1/4"	100'	100	100	1.00	100
54 1/2"	100'	100	100	1.00	100
54 3/4"	100'	100	100	1.00	100
55"	100'	100	100	1.00	100
55 1/4"	100'	100	100	1.00	100
55 1/2"	100'	100	100	1.00	100
55 3/4"	100'	100	100	1.00	100
56"	100'	100	100	1.00	100
56 1/4"	100'	100	100	1.00	100
56 1/2"	100'	100	100</		

FLUGS AND ADAPTERS

[illegible]

SHOOTING RECORD

[illegible]

TOOLS USED

_____ feet to _____ feet	_____ feet to _____ feet	_____ feet to _____ feet	_____ feet to _____ feet
_____ feet to _____ feet	_____ feet to _____ feet	_____ feet to _____ feet	_____ feet to _____ feet

DATE

If gas well, cu. ft. per 24 hours _____ emulsion; _____% water; and _____% sediment.	Put to producing _____ barrels of fluid of which _____% was oil; _____%
---	--

EMPLOYEES

Driller			
Driller			

FORMATION RECORD

[illegible]