



Form 9-330

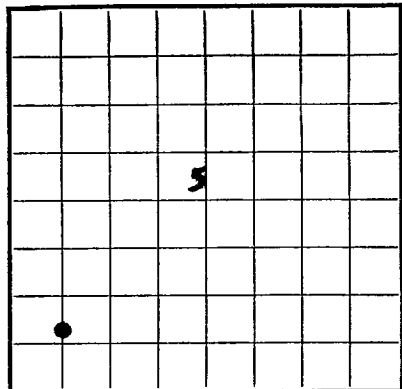

LOCATE WELL CORRECTLY



U. S. LAND OFFICE H. Mex.  
SERIAL NUMBER LC 061295  
LEASE OR PERMIT TO PROSPECT REFUSED

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

D. D. S.  
ARTESIAN OFFICE

LOG OF OIL OR GAS WELL

Company Steinberger Drilling Co. Address Reswell, New Mexico  
Lessor or Tract Union Federal Field Undesignated State New Mexico  
Well No. 1 Sec. 5 T13-S R. 27-M Meridian NMPM County Chaves  
Location 666.3 ft. [N.] of S. Line and 654.5 [E.] of W. Line of Sec. 5 Elevation 3589.5  
(Derrick floor relative to sea level)

The information given herewith is a complete and correct record of the well and all work done thereon so far as can be determined from all available records.

Signed H. Steinberger  
Date February 23, 1960 Title Co-owner

The summary on this page is for the condition of the well at above date.

Commenced drilling February 15, 1960 Finished drilling February 20, 1960

OIL OR GAS SANDS OR ZONES  
(Denote gas by G)

No. 1, from \_\_\_\_\_ to \_\_\_\_\_ No. 4, from \_\_\_\_\_ to \_\_\_\_\_  
No. 2, from \_\_\_\_\_ to \_\_\_\_\_ No. 5, from \_\_\_\_\_ to \_\_\_\_\_  
No. 3, from \_\_\_\_\_ to \_\_\_\_\_ No. 6, from \_\_\_\_\_ to \_\_\_\_\_

IMPORTANT WATER SANDS

No. 1, from 0 to \_\_\_\_\_ No. 3, from \_\_\_\_\_ to \_\_\_\_\_  
No. 2, from \_\_\_\_\_ to \_\_\_\_\_ No. 4, from \_\_\_\_\_ to \_\_\_\_\_

CASING RECORD

| Size casing                | Weight per foot | Threads per inch | Make  | Amount | Kind of shoe | Cut and pulled from | Perforated |     | Purpose |
|----------------------------|-----------------|------------------|-------|--------|--------------|---------------------|------------|-----|---------|
|                            |                 |                  |       |        |              |                     | From—      | To— |         |
| 8"                         | 28              | 5                | Steel | 1334   | Plug         | Surface             |            |     | Sealing |
| HISTORY OF OIL OR GAS WELL |                 |                  |       |        |              |                     |            |     |         |

MUDDING AND CEMENTING RECORD

| Size casing | Where set | Number sacks of cement | Method used | Mud gravity | Amount of mud used |
|-------------|-----------|------------------------|-------------|-------------|--------------------|
| 8"          | 131       | 15                     | Plug        |             |                    |

PLUGS AND ADAPTERS

Heaving plug—Material \_\_\_\_\_ Length \_\_\_\_\_ Depth set \_\_\_\_\_  
Adapters—Material \_\_\_\_\_ Size \_\_\_\_\_

SHOOTING RECORD

| Size | Shell used | Explosive used | Quantity | Date | Depth shot | Depth cleaned out |
|------|------------|----------------|----------|------|------------|-------------------|
|      |            |                |          |      |            |                   |

TOOLS USED

Rotary tools were used from 0 feet to 793 feet, and from \_\_\_\_\_ feet to \_\_\_\_\_ feet  
Cable tools were used from \_\_\_\_\_ feet to \_\_\_\_\_ feet, and from \_\_\_\_\_ feet to \_\_\_\_\_ feet

DATES

\_\_\_\_\_, 19\_\_\_\_ Put to producing \_\_\_\_\_, 19\_\_\_\_  
The production for the first 24 hours was \_\_\_\_\_ barrels of fluid of which \_\_\_\_\_% was oil; \_\_\_\_\_% emulsion; \_\_\_\_\_% water; and \_\_\_\_\_% sediment. Gravity, °Bé. \_\_\_\_\_  
If gas well, cu. ft. per 24 hours \_\_\_\_\_ Gallons gasoline per 1,000 cu. ft. of gas \_\_\_\_\_  
Rock pressure, lbs. per sq. in. \_\_\_\_\_

EMPLOYEES

John Ailey, Driller \_\_\_\_\_, Driller  
Thomas E. Holden, Driller \_\_\_\_\_, Driller

FORMATION RECORD

| FROM— | TO— | TOTAL FEET | FORMATION                      |
|-------|-----|------------|--------------------------------|
| 0     | 65  | 65         | Red Clay                       |
| 65    | 250 | 185        | Hard White Anhydrite           |
| 250   | 525 | 275        | Hard White Anhydrite & Red Bed |
| 525   | 538 | 13         | Salt & Anhydrite               |
| 538   | 560 | 22         | Gray Shale Sand                |
| 560   | 610 | 50         | Salt & Red Shale               |
| 610   | 678 | 68         | Red Shale                      |
| 678   | 768 | 90         | Gray Sand                      |
| 768   | 793 | 25         | Red Shale & Anhydrite          |

