

TOOLS USED

Rotary tools were used from 0 feet to 330 feet, and from feet to feet
 Cable tools were used from feet to feet, and from feet to feet

DATES

19 Put to producing barrels of fluid of which % was oil: %
 The production for the first 24 hours was emulsion; % water; and % sediment. Gravity, °Bé.
 If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas
 Rock pressure, lbs. per sq. in.

EMPLOYEES


W. T. Avant, Driller Joe Speer, Driller
 John L. Evans, Driller

FORMATION RECORD

FROM	TO	TOTAL FEET	FORMATION
0	35	35	Sand and Caliche
35	60	25	Sand
60	750	700	Red beds (Sand, Shale, Anhydrite)
750	830	75	Sand
830	1080	250	Red beds (Sand, Shale, Anhydrite)
1080	1400	320	Anhydrite, dolomite, sand & chert
1400	2140	740	Dolomite
2140	2490	350	Limestone
2490	2650	160	Dolomite
2650	2680	30	Sand
2680	2900	220	Sand, dolomite, anhydrite
2900	3170	270	Dolomite, Anhydrite and green sand
3170	3200	30	Sand
3200	4110	910	Dolomite, Anhydrite and shale
4110	4340	220	Dolomite, Sand and Anhydrite
4340	4420	80	Dolomite, Anhydrite and trace
4420	5430	910	Dolomite, Anhydrite and shale
5430	5990	560	Dolomite, Anhydrite and shale
5990	6250	260	Dolomite, Anhydrite and shale
6250	6400	150	Lime and Shale
6400	6500	100	Lime, shale and sand
6500	8650	2150	Lime, shale and chert
8650	8800	150	Dolomite
8800	9180	380	Dolomite and chert
9180	9260	80	Dolomite, shale and sand
9260	9336	76	Dolomite

U.S. 9330' San Schin. Elec. log from 1000'

FORMATION RECORD—Continued

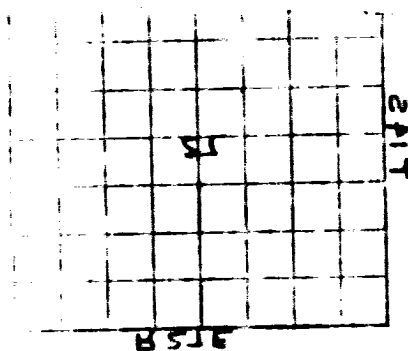

GEOLOGICAL SURVEY
 DEPARTMENT OF THE INTERIOR
 UNITED STATES

REVENUE OF BUREAU OF REVENUE
 DEPARTMENT OF THE INTERIOR
 UNITED STATES