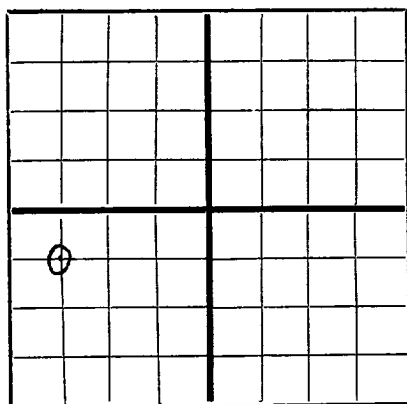



N

AREA 640 ACRES
LOCATE WELL CORRECTLY

ORIGINAL INSTRUMENT

NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Richfield Oil Corporation 555 South Flower Los Angeles, California
Company or Operator Address
J. P. White Well No. **3-2** in **NW 1/4 SW 1/4** of Sec. **6**, T. **12-S**
Lease
R. **29-E**, N. M. P. M. **Wildcat** Field, **Chaves** County.
Well is **3300** feet south of the North line and **4620** feet west of the East line of **Section 6**.
If State land the oil and gas lease is No. Assignment No.
If patented land the owner is **J. P. White Company**, Address **Roswell, New Mexico**
If Government land the permittee is, Address
The Lessee is **Richfield Oil Corporation**, Address **Los Angeles, California**
Drilling commenced **April 11** 19 **48** Drilling was completed **June 5** 19 **48**
Name of drilling contractor **Marshall & Smith**, Address **303 Carper Bldg, Artesia, NM**
Elevation above sea level at top of casing **3670** feet.
The information given is to be kept confidential until **October 1** 19 **48**.

OIL SANDS OR ZONES

No. 1, from **2256** to **2513** No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from **at 2513 feet** to feet **Fluid rose to 2348 feet**
No. 2, from to feet
No. 3, from to feet
No. 4, from to feet

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
11 3/4"	54 1/2	8	Smls	195	None	---	---	---	---
7"	26 1/2	8	"	2195	Tex. Pot.	---	---	---	---

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
15"	11 3/4"	195'	100	Halliburton	---	---
8 3/4"	7"	2195'	---	---	Thick	18 sacks clay
						36 sacks Aguagel
						48 sacks Zeogel

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters — Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
---	---	HCL	2000 gal.	5/29/48	2252-2460'	2460'

Results of shooting or chemical treatment **Salt water and oil entered at approximate rate of 2 B/D cutting about 90% water.**

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from **0** feet to **2195** feet, and from feet to feet
Cable tools were used from **2195** feet to **2513** feet, and from feet to feet

PRODUCTION

Put to producing **---** 19 **---**
The production of the first 24 hours was barrels of fluid of which % was oil; % emulsion; % water; and % sediment. Gravity, Be.
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in.

EMPLOYEES

D. R. Selman, Driller **N. P. Black**, Driller
T. B. Hammond, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this **8th** day of **June**, 19 **48**
MARY WARREN DOYLE Notary Public in & for **Midland Co., Texas**
My Commission expires **June, 1949**
Roswell, New Mexico **June 5, 1948**
Name **F. L. Campbell**
Position **Engineer**
Representing **Richfield Oil Corporation**
Company or Operator
Address **555 South Flower, Los Angeles, Calif.**

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	200	200	Red beds, shells and anhydrite
200	346	146	Salt
346	955	609	Salt and anhydrite
955	1010	55	Anhydrite
1010	1125	115	Dolomite, salt and anhydrite
1125	1285	160	Anhydrite and red shale
1285	1335	50	Anhydrite, red shale and lime
1335	1535	200	Red shale and salt
1535	1829	294	Red shale, salt and anhydrite
1829	1956	127	Lime and anhydrite
1956	2256	300	Lime
2256	2513	257	Lime with oil staining