

UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
Alamosa, NM 88210

Budget Bureau No. 1004-0135
Expires August 31, 1985

5. LEASE DESIGNATION AND SERIAL NO.

NM 68078

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Deemar Fed

9. WELL NO.

1

10. FIELD AND POOL, OR WILDCAT

King Camp North DEVONIAN

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA

Sec 9, T-14S, R-29E

12. COUNTY OR PARISH 13. STATE

Chaves

N.M.

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals.)

1. OIL WELL ☒ GAS WELL ☐ OTHER ☐

2. NAME OF OPERATOR

Stevens Operating Corporation

3. ADDRESS OF OPERATOR

P.O. Box 2408, Roswell, N.M. 88202

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.)

See also space 17 below.)

At surface Unit K Sec 9, T-14-S, R-29E

1974 FSL, 1988 FWL

1980 1980

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, GR, etc.)

3712' GR

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

FRACTURE TREAT

SHOOT OR ACIDIZE

REPAIR WELL

(Other)

PULL OR ALTER CASING

MULTIPLE COMPLETE

ABANDON*

CHANGE PLANS

X

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

FRACTURE TREATMENT

SHOOTING OR ACIDIZING

(Other)

REPAIRING WELL

ALTERING CASING

ABANDONMENT*

(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

Moranco Drilling Inc. will use Rig 10 on the re-entry of the Deemar Fed #1. The information provided on the blowout preventer in the A.P.D. should be changed to a Shaffer LWS hydraulic double 11' x 3000 P.S.I. (See attached exhibit)



18. I hereby certify that the foregoing is true and correct

SIGNED

B. L. Turner

TITLE Production Supt.

DATE 5-26-89

(This space for Federal or State office use)

APPROVED BY

CONDITIONS OF APPROVAL, IF ANY:


TITLE



DATE APPROVED

PETER W. CHESTER

MAY 26 1989

*See Instructions on Reverse Side



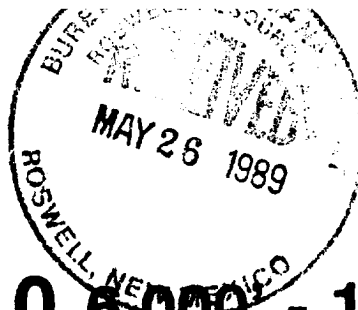

RIG 10 6,000 - 10,500'

MORANCO
DRILLING INC.

P.O. Box 1860 • Hobbs, New Mexico 88240 • 505/397-3511 • 800/922-3745

DRAWWORKS

Mid Continent U-36A
Drum: 1 1/8" Lebus grooved
Compound: 2-engine oil bath chain drive
Brake: Hydromatic Parkersburg 15" Single
Satellite Automatic Driller
Duo-O-Matic Crown Block Protector

ENGINES

Two 410-H.P. D353TA Caterpillar Diesel with Torque Converter.

DERRICK

Lee C. Moore, 127', 450,000-lb. nominal capacity.

SUBSTRUCTURE

Lee C. Moore, 17' high 550,000-lb. nominal capacity.

MUD PUMPS

Pump No. 1: Emsco DB550. 550-H.P. with steel fluid end.
4 3/4" - 7 3/4" liners, 16" stroke. Powered by D379 Caterpillar.
Pump No. 2: C-250 Ideal driven by D353 Caterpillar.

DRILL STRING

3,000' 4 1/2" Grade E, 20-lb.
7,500' 4 1/2" Grade E, 16.60-lb.
Tool Joints: 4 1/2" XH, 6 1/4" OD.
Twenty-five drillcollars 6 1/2" OD, 2 1/4" ID.
Other sized drillpipe and drillcollars available.

BLOWOUT PREVENTERS

One Shaffer LWS hydraulic double 11" x 3,000 p.s.i. One Hydriil 11" x 3,000 p.s.i. Annular. Choke manifold 4" x 3,000 p.s.i. flanged connections. Payne 4-valve accumulator closing unit.

MUD SYSTEM

Three 30' x 7 1/2' x 6' steel pits with 700-bbl capacity and one 250-bbl slug pit. Complete low pressure circulating system, consisting of four submerged mud guns and two countersunk jets in each pit. System utilizes a 6 x 8 centrifugal pump, powered by diesel.

MUD HOUSE

One 8' x 30' Steel Storage House.

COMMUNICATIONS

24-hour direct telephone interconnection through Hobbs (505/393-1111) or 1-800/922-3745.

OTHER EQUIPMENT

BLOCKS. Shorty 300-ton.

HOOK. 200-ton.

SWIVEL. 200-ton.


ROTARY TABLE. 20 1/2".

SHALE SHAKER. Harrisburg single screen.


ELECTRICAL POWER. Two 90-kw AC generators powered by diesel engines. AC fluorescent or mercury vapor lights. All vapor-proof.

FRESH WATER STORAGE. Two 500-bbl horizontal tanks.

HOUSING. One 10' x 44' air-conditioned house with sleeping and cooking facilities.

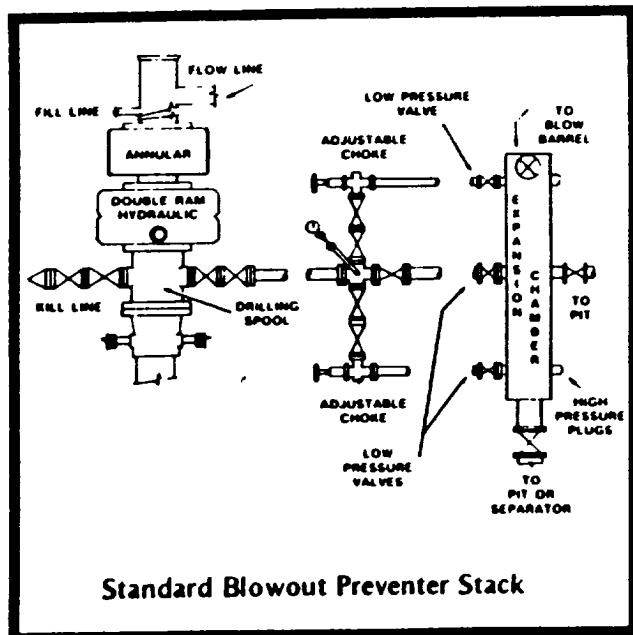

Standard Blowout Preventer Stack

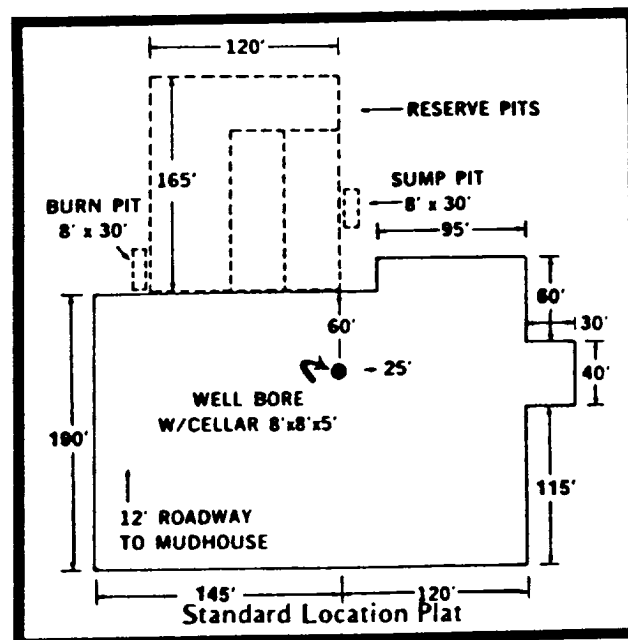

Standard Location Plat