


STATE OF NEW MEXICO
ENERGY AND MINERALS DEPARTMENT

NO. OF COPIES RECEIVED	
DISTRIBUTION	
SANTA FE	<input checked="" type="checkbox"/>
FILE	<input checked="" type="checkbox"/>
U.S.O.B.	<input type="checkbox"/>
LAND OFFICE	<input type="checkbox"/>
OPERATOR	<input checked="" type="checkbox"/>

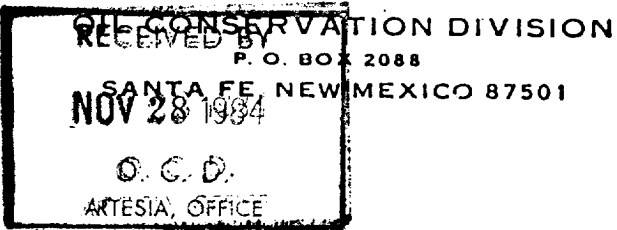

Form C-103
Revised 10-1-78

5a. Indicate Type of Lease
State ☐ Fee ☒
5. State Oil & Gas Lease No.

SUNDRY NOTICES AND REPORTS ON WELLS

DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR.
USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.

1. OIL WELL <input checked="" type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER- 2. Name of Operator Brady W. Production, Inc. Address of Operator P.O. Box 9128, Midland, Texas 79708 4. Location of Well UNIT LETTER G 2310 FEET FROM THE North LINE AND 2329 FEET FROM THE East LINE, SECTION 33 TOWNSHIP 6S RANGE 26E NMPM. 15. Elevation (Show whether DF, RT, GR, etc.) 3608 GR.	7. Unit Agreement Name 8. Farm or Lease Name OSAGE 9. Well No. 2 10. Field and Pool, or Wildcat Linda San Andres 12. County Chaves
---	--

Check Appropriate Box To Indicate Nature of Notice, Report or Other Data
NOTICE OF INTENTION TO: SUBSEQUENT REPORT OF:

PERFORM REMEDIAL WORK <input type="checkbox"/>	PLUG AND ABANDON <input type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>	COMMENCE DRILLING OPS. <input type="checkbox"/>	PLUG AND ABANDONMENT <input checked="" type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	OTHER <input type="checkbox"/>	CASING TEST AND CEMENT JOBS <input type="checkbox"/>	OTHER <input type="checkbox"/>

17. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1703.

On November 12, 1984 this well was plugged with a 25SX. plug placed from 700' to 1069' T.D. and a 10SX. plug from surface to 145' - 10# bentonite mud was placed between the cement plugs 102' of 8 5/8" - 23# surface casing and 1069' - 4 1/2" - 9 1/2# production casing was left in hole - 4" marker was set in top, and the location cleaned and ready for inspection.

Post ID-2
12-7-84
PAA

18. I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNED <u>Ch. H. Brady</u>	TITLE <u>Operator</u>	DATE <u>November 27, 1984</u>
APPROVED BY <u>Daniel Moore</u>	TITLE <u>Geologist</u>	DATE <u>1/3/85</u>
CONDITIONS OF APPROVAL, IF ANY:		