

Submit 3 Copies To Appropriate District Office
District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 South First, Artesia, NM 87210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-103
Revised March 25, 1999

WELL API NO. 30-005-10030

Indicate Type of Lease
STATE ☐ FEE ☒

6. State Oil & Gas Lease No.

7. Lease Name or Unit Agreement Name:
Sturgeon

8. Well No.
001

9. Pool name or Wildcat
Linda San Andres

4. Well Location
Unit Letter F : 1650 feet from the North line and 1650 feet from the West line
Section 33 Township 6S Range 26E NMPM Chaves County

10. Elevation (Show whether DR, RKB, RT, GR, etc.)
3603

11. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒

TEMPORARILY ABANDON ☐ CHANGE PLANS ☐

PULL OR ALTER CASING ☐ MULTIPLE COMPLETION ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐

COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☐

CASING TEST AND CEMENT JOB ☐

OTHER: ☐

12. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompilation.

Casing
8 7/8 107' w/ 5000 lbs
4 1/2 1053 w/ 3000 lbs
pads 985-1041

MIRU WLL. POOH w/ Production Egg. Dump sand across pads to 946' place 100' cmt on top of sand to 846' Tag. Displace hole w/ Gelled Brine. Pads @ 150' pump cmt + line to surface. Fill 4 1/2 w/ cmt to surface. Clean Location + Install day hole machine. This location has Tank Battery. Remove all production egg. + clean Area.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Russell White TITLE owner DATE 01-26-02


Type or print name Russell White Telephone No. 627-2065
(This space for State use)

APPROVED BY Denny Gray TITLE Compliance officer DATE 2-4-02
Conditions of approval, if any:

Plug according to attached procedure -
Work must be completed by 2-22-02.

Operator MEW Enterprise
 Well STURGEN #1
 Unit F Section 33 Township 6 Range 26
 API # 30-005-10070

TOPS

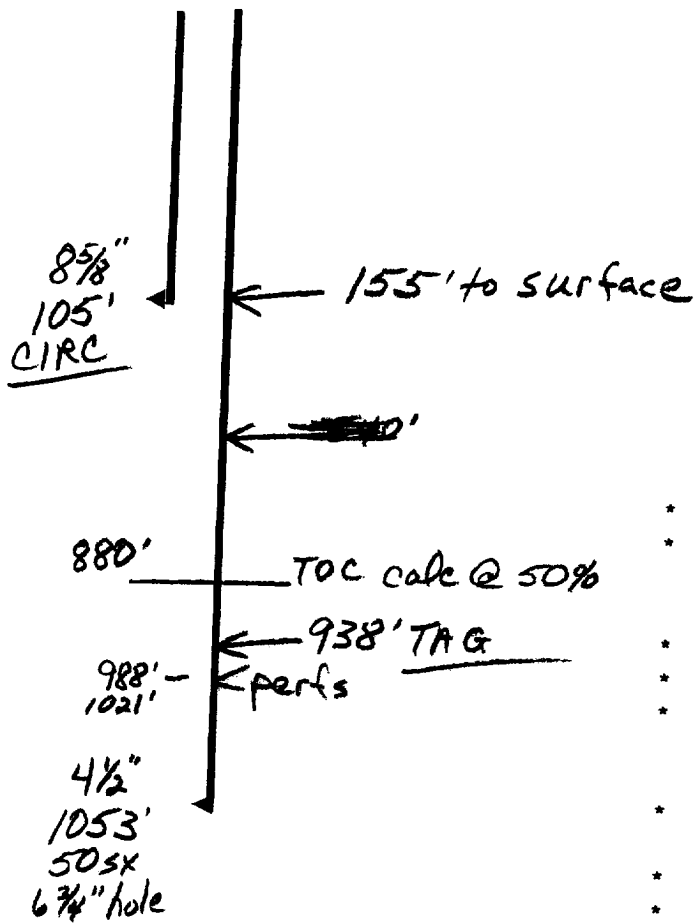

San Andreas 590

- * Contact OCD 24 hrs. prior to any work done.
- * Salt gel mud consisting of 10# brine with 25# of gel per barrel must be placed between each plug.
- * Install dry hole marker as per Rule 202.B.2
- * Plugs are to be set from point indicated up.
- * Plugs must not be less than 100' or 25 Sacks of cement, whichever is greater, unless specifically indicated.
- * Shoe and stub plugs will be 50' above and below shoe or stub and tagged.
- * Surface plug will be from 0' - 60'
- * Where plugs are required, cement must be placed inside and outside of all casing string(s) in the correct footage or sacks required, if no cement exists.
- * Plugs to be tagged will be indicated.

MLB