



HOLLIBURTON COMPANY
DUNCAN, OKLAHOMA

RECEIVED

MAY 25 1964

RAL
JDB
PWH
DDS
File

MEASURING LINE

TEMPERATURE SURVEY

O. C. C.
ARTESIA, OFFICE

COMPANY Shell Oil Co.
WELL NO. Cannon 8-A
POOL East Roswell
STATE New Mexico COUNTY Chaves
SECTION _____

COMPANY _____
FILE _____
WELL _____
POOL _____
COUNTY _____
STATE _____

LOG MEASURED FROM _____
DRILLING MEASURED FROM _____
PERMANENT DATUM _____


DATE OF CEMENTING 4-7-64 TIME 7:00 PM
DATE OF SURVEY 4-8-64 TIME 4:00 AM
AMOUNT OF CEMENT 300 TYPE INCC
AMOUNT OF ADMIX 4% TYPE C.C.

CASING SIZE 9 5/8 FROM 0 TO 435 DIAM OF HOLE 12 1/4 FROM 0 TO 435
FROM _____ TO _____ FROM _____ TO _____

SURVEY BEGINS AT 50' FEET. ENDS AT 300' FEET.
APPROX. CALCULATED FILL-UP OF _____ FT. BASED ON PERFECT HOLE AND ON AN AVERAGE OF _____ CU. FT. PER SACK OF SE' CEMENT
APPROX. TOP CEMENT 225' FEET. MAX TEMP. 77° @ 300 FEET.
RECORDED BY Don McMahon WITNESSED _____

REMARKS OR OTHER DATA

TEMPERATURE IN DEGREES FAHRENHEIT

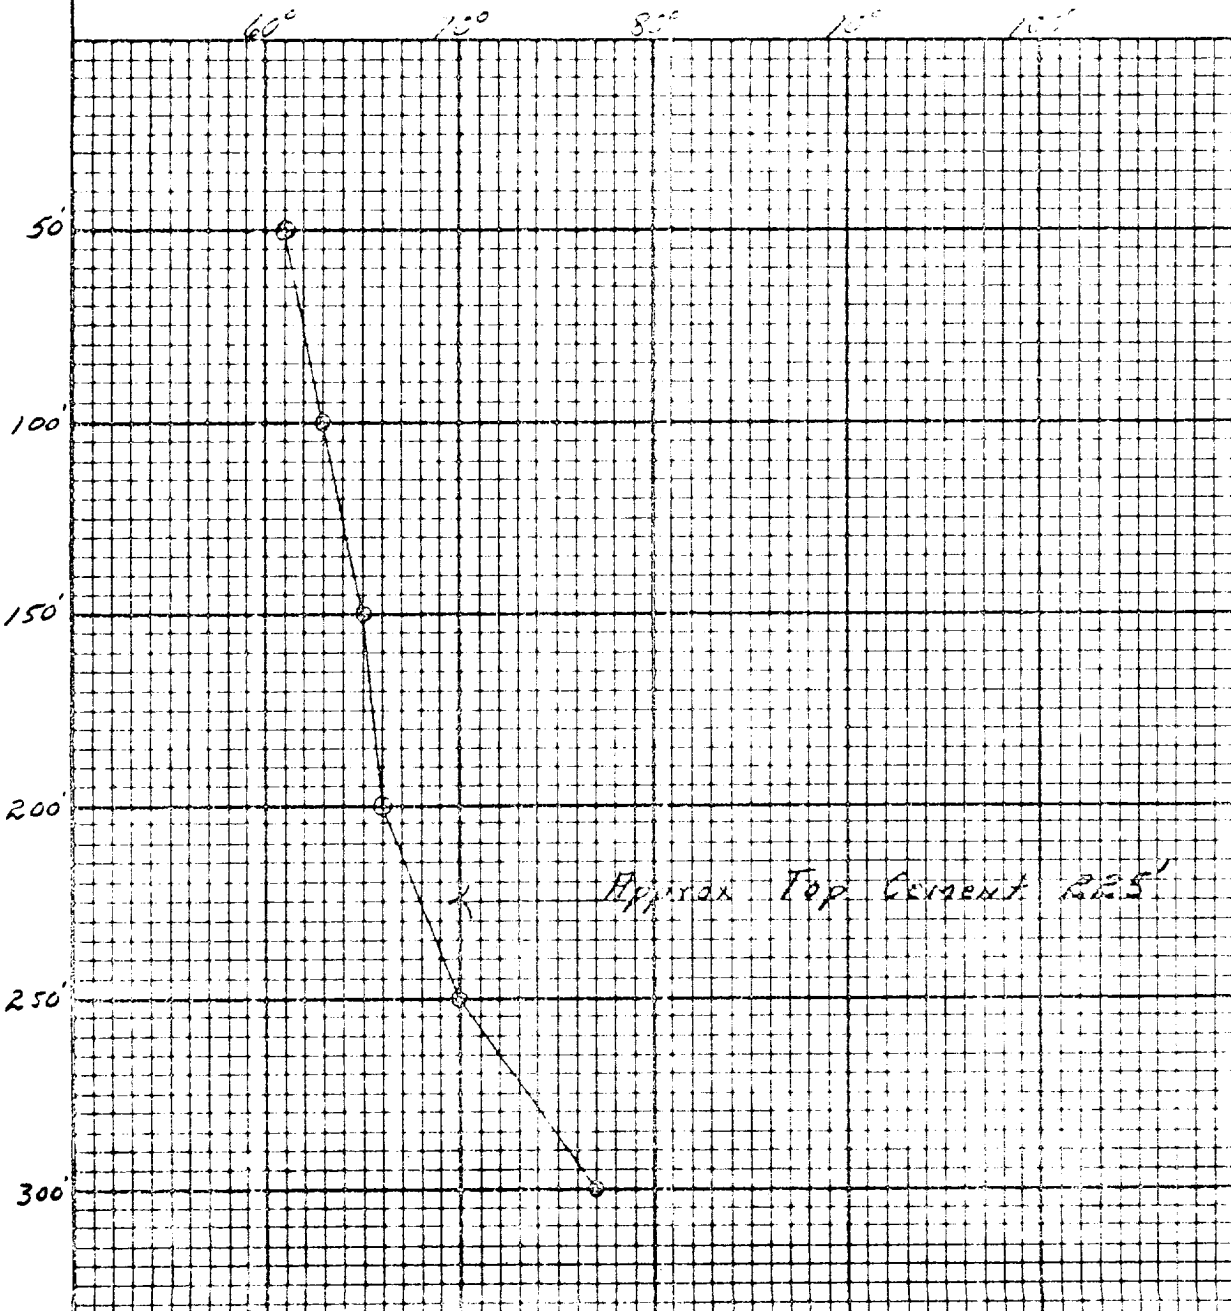



COMPANY

DUNCAN, OKLAHOMA

RECEIVED

MAY 25 1964

O. C. C.

ARTESIAN OFFICE

SAB
PORT
DOS
File

MEASURING LINE

TEMPERATURE SURVEY

COMPANY Shell Oil Co.
WELL NO. CANNON 8-A
POOL East Roswell
STATE NEW MEXICO COUNTY CHAVES
SECTION _____

COUNTY _____
POOL _____
WELL _____
COMPANY _____
FILE _____
STATE _____

LOG MEASURED FROM _____
DRILLING MEASURED FROM _____
PERMANENT DATUM _____

DATE OF CEMENTING 4-12-64 TIME 11:00 PM
DATE OF SURVEY 4-13-64 TIME 8:00 AM
AMOUNT OF CEMENT 110 TYPE INCOX HEAT
AMOUNT OF ADMIX _____ TYPE _____

CASING SIZE 4 1/2 FROM 0 TO 976 DIAM. OF HOLE 6 1/4 FROM _____ TO _____
FROM _____ TO _____ FROM _____ TO _____

SURVEY BEGINS AT 10' FEET. ENDS AT 600 FEET.
APPROX. CALCULATED FILL-UP OF _____ FT. BASED ON PERFECT HOLE AND ON AN AVERAGE OF _____ CU. FT. PER SACK OF SET CEMENT
APPROX. TOP CEMENT 50' FEET. MAX. TEMP. 87° @ 500 FEET.
RECORDED BY DON McMAHAN WITNESSED _____

REMARKS OR OTHER DATA

TEMPERATURE IN DEGREES FAHRENHEIT

60° 70° 80° 90° 100°

