


P 26-8-28

Hungarian Petro Corp.

Twin Lakes SA

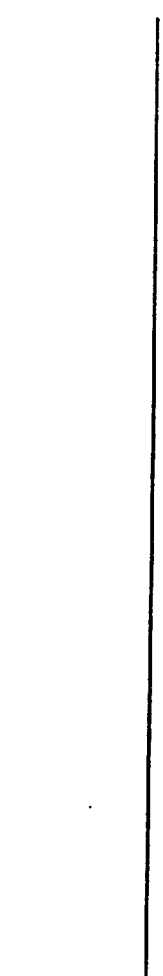


3 5/8" - 114'

T. Perf. - 225'

T SA - 1915'

- \* Erect dry hole marker
- \* Perf. 4 1/2" csg > 150' circ. cmt to surface inside + outside 4 1/2"
- \* Load hole with mud + set 2500 cmt P/Lj 1965' - 1865'
- \* Run + Set CIBPO 2560' w/ 35' cement.

 CIBPO 2560' w/ 35' cmt,  
 T. Perf. 2521'

4 1/2" - 2760'

w/ 12558

cal. loc - 1849'