

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

C/SF

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☐ gas ☒ other ☐

2. NAME OF OPERATOR  
McCLELLAN OIL CORPORATION

3. ADDRESS OF OPERATOR  
P.O. Drawer 730, Roswell, N.M. 88202

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)  
AT SURFACE: 990' FWL & 660' FNL  
AT TOP PROD. INTERVAL:  
AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA


REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐  
FRACTURE TREAT ☐  
SHOOT OR ACIDIZE ☐  
REPAIR WELL ☐  
PULL OR ALTER CASING ☐  
MULTIPLE COMPLETE ☐  
CHANGE ZONES ☐  
ABANDON\* ☐

(other) Casing and Cement

SUBSEQUENT REPORT OF:

☐  
☐  
☐  
☐  
☐  
☐  
☐  
☐  
☐  
☐

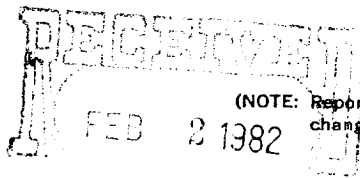

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

OIL & GAS  
U.S. GEOLOGICAL SURVEY  
ROSWELL, NEW MEXICO

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

1/27/82: Drilled to 4000' with 7-7/8" bit.  
Ran 3933' of 4½", 10.5 lb/ft J-55 new casing. Cemented with 300 sks of Class "C", 50-50 Poz with 2% gel, .3% CFR-2, .3% Halad-4, 6# salt. Plug down at 3:30 P.M. WOC - 4 hours. Nipple up wellhead. Temperature Survey after 12 hours. PBTD - 3901' TOC - 3100'. Release drilling rig.

Subsurface Safety Valve: Manu. and Type \_\_\_\_\_ Set @ \_\_\_\_\_ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED Paul R. Kagle TITLE Engineer DATE 2/1/82

(This space for Federal or State office use)

APPROVED BY \_\_\_\_\_  
CONDITIONS OF APPROVAL, IF ANY: ROGER A. CHAPMAN

DATE \_\_\_\_\_

FEB 16 1982

U.S. GEOLOGICAL SURVEY  
ROSWELL, NEW MEXICO  
\*See instructions on Reverse Side