

NM OIL CONS. COMMISSION
Drawer 1~
Artesia, N. M. 88210
UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUBMIT IN TRIPLICATE*
(Other instructions on re-
verse side)

Form approved.
Budget Bureau No. 42-R1424.

5. LEASE DESIGNATION AND SERIAL NO.

NM-16069

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Coyote Draw Federal

9. WELL NO.

4

10. FIELD AND POOL, OR WILDCAT

Wildcat

11. SEC., T., R., M., OR BLK. AND
SURVEY OR AREA

Section 12-T8S-R24E

12. COUNTY OR PARISH 13. STATE

Chaves

NM

SUNDRY NOTICES AND REPORTS ON WELLS
(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals.)

1. OIL WELL ☐ GAS WELL ☒ OTHER

2. NAME OF OPERATOR

McClellan Oil Corporation /

3. ADDRESS OF OPERATOR

Post Office Drawer 730, Roswell, New Mexico 88201

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.*
See also space 17 below.)

At surface

660' FNL & 1980' FEL

SEP 23 1981
O. C. D.
ARTESIA, OFFICE

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, CR, etc.)

3650' G.L.

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

☐
☐
☐
☐
☐

PULL OR ALTER CASING

☐
☐
☐
☐
☐

FRACTURE TREAT

MULTIPLE COMPLETE

SHOOT OR ACIDIZE

ABANDON*

REPAIR WELL

CHANGE PLANS

(Other)

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

☐
☐
☐
☐
☐

FRACTURE TREATMENT

SHOOTING OR ACIDIZING

(Other) Spud, casing, cement

REPAIRING WELL

ALTERING CASING

ABANDONMENT*

☐
☐
☐
☒
☐

(NOTE: Report results of multiple completion on Well
Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*


9/15/81: Drilled 40' of 24" hole with Link Rat Hole.
Set 40' of 20" casing. Cemented with 6 yards Ready-Mix.

9/18/81: Move in Tex-Mex Rig No. 2.

9/19/81: Spud with 17½" bit at 2:00 A.M.

9/20/81: Drilled to 447'. Ran 454' of 13-3/8" casing. Cemented with 100 sx Thickset with 8# Gilsonite, ¼# Flocele, 2% CaCl, 250 sx Halliburton Light cement with 6# Gilsonite, ¼# Flocele, 2% CaCl, 200 sx Class "C" with 2% CaCl. Circulated 200 sx. WOC - 12 hours. NU BOP.

9/21/81: Tested casing to 500 psi. Drill out with 12¼" bit.

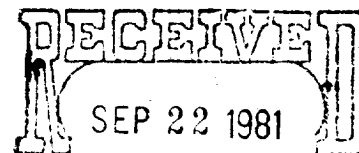

OIL & GAS
U.S. GEOLOGICAL SURVEY
ROSWELL, NEW MEXICO

18. I hereby certify that the foregoing is true and correct

SIGNED

ROBERT J. KRAMERMAN
ACCEPTED FOR RECORD
SEP 22 1981

TITLE Engineer

DATE 9/21/81

(This space for Federal or State office use)

APPROVED BY

CONDITIONS OF APPROVAL, IF ANY:

TITLE

DATE

U.S. GEOLOGICAL SURVEY
ROSWELL, NEW MEXICO

*See Instructions on Reverse Side