

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

C/SF

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)


1. oil ☐ well ☐ gas ☒ well ☐ other ☐
2. NAME OF OPERATOR
Western Reserves Oil Company ✓
3. ADDRESS OF OPERATOR
P. O. Box 993 Midland, Texas 79702
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
660' FNL & 1980' FEL
AT SURFACE:
AT TOP PROD. INTERVAL: Section 13 T-5-S R-24-E
AT TOTAL DEPTH: 4090'
16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON* ☐

(other) Surface Casing

SUBSEQUENT REPORT OF:

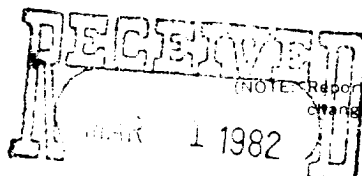

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

OIL & GAS
U.S. GEOLOGICAL SURVEY
ROSWELL, NEW MEXICO

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

2-6-82

949' of 13-3/8 H-40 40# casing. Set @ 920' and cemented with 400 sxs Halliburton lite cement, 1/2 # floccule per sx. and 4 % CaCl. and 300 sxs. of thick set, 2* CaCl and 300 sxs of class C cement. Total of 1000 sxs., circulated 150 sxs. to surface.

Subsurface Safety Valve: Manu. and Type

Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED

Robert J. ...

TITLE

DATE

3/26/82

APPROVED BY _____
CONDITIONS OF APPROVAL, IF ANY

TITLE

DATE

ACCEPTED FOR RECORD

MAR 1 1982
U.S. GEOLOGICAL SURVEY
ROSWELL, NEW MEXICO