

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

C/SF

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)


1. oil ☐ well gas ☒ well other ☐
2. NAME OF OPERATOR
MESA PETROLEUM CO. ✓
3. ADDRESS OF OPERATOR
1000 VAUGHN BUILDING/MIDLAND, TEXAS 79701
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 990' FNL & 1980' FEL
AT TOP PROD. INTERVAL:
AT TOTAL DEPTH:
16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

- TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON* ☐
(other) 8 5/8" csg & cement

SUBSEQUENT REPORT OF:

- ☐
☐
☐
☐
☐
☐
☐
☐
☐
☐

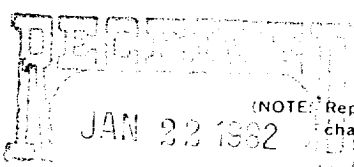

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

OIL & GAS
U.S. GEOLOGICAL SURVEY
ROSWELL, NEW MEXICO

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Drilled 12 1/4" hole to 1837' and ran 48 jts 8 5/8", 24#, K-55 casing set at 1837'. Cemented with 700 sx HLW + 1# Flocele + 4% CaCl, 300 sx Thixset + 4% CaCl, and tailed in with 300 sx "C" + 2% CaCl. PD at 6:30 a.m. 1-17-82. Circulated 150 sx. Tested BOPs and casing to 600 psi for 30 min.-ok. Reduced hole to 7 7/8" and drilled ahead on 1-18-82. WOC total of 19 hours.

XC: USGS (6), TLS, CEN RCDS, ACCTG, MEC, REM , PARTNERS, ROSWELL , FILE
Subsurface Safety Valve: Manu. and Type


Set @ ... Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED *R. E. Nash*

REGULATORY COORDINATOR

1-20-82

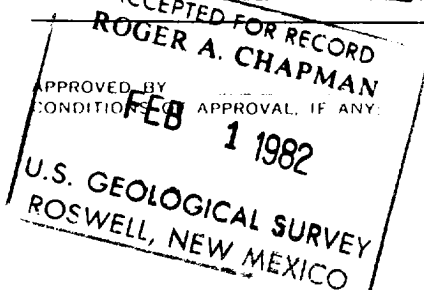

(This space for Federal or State office use)

TITLE

DATE