

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

Draper 00

Artesia, NM 88210

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☐ gas ☒ other

2. NAME OF OPERATOR  
MESA PETROLEUM CO. /

3. ADDRESS OF OPERATOR  
1000 VAUGHN BUILDING/MIDLAND, TEXAS 79701

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)  
AT SURFACE: 660' FNL & 1980' FWL  
AT TOP PROD. INTERVAL:  
AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO: SUBSEQUENT REPORT OF:

TEST WATER SHUT-OFF	<input type="checkbox"/>	<input type="checkbox"/>
FRACTURE TREAT	<input type="checkbox"/>	<input type="checkbox"/>
SHOOT OR ACIDIZE	<input type="checkbox"/>	<input type="checkbox"/>
REPAIR WELL	<input type="checkbox"/>	<input type="checkbox"/>
PULL OR ALTER CASING	<input type="checkbox"/>	<input type="checkbox"/>
MULTIPLE COMPLETE	<input type="checkbox"/>	<input type="checkbox"/>
CHANGE ZONES	<input type="checkbox"/>	<input type="checkbox"/>
ABANDON*	<input type="checkbox"/>	<input type="checkbox"/>
(other) Spud, 13 3/8" csg & cement		

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

Spudded well with 17 1/2" hole on 1-22-82. Drilled to 850' and ran 20 jts 13 3/8", 48#, H40 casing set at 850'. Cemented with 700 sx HLW + 1# Flocele + 4% CaCl, 300 sx Thixset + 4% CaCl, and tailed in with 300 sx "C" + 2% CaCl. PD at 8:30 p.m. 1-23-82. Circulated 450 sx. WOC 17 hours, blew hole dry and waited one hour-no fluid. Reduced hole to 12 1/4" and drilled ahead on 1-24-82. WOC total of 18 1/2 Hours.

XC: USGS (6), TLS, CEN RCDS, ACCTG, MEC, REM , PARTNERS, ROSWELL , FILE  
Subsurface Safety Valve: Manu. and Type \_\_\_\_\_ Set @ \_\_\_\_\_ Ft.

18. I hereby certify that the foregoing is true and correct


SIGNED R. E. Chapman REGULATORY COORDINATOR DATE 1-25-82

ROGER A. CHAPMAN (This space for Federal or State office use)

APPROVED BY FEB 1 1982  
CONDITIONS OF APPROVAL

U.S. GEOLOGICAL SURVEY  
ROSWELL, NEW MEXICO

\*See Instructions on Reverse Side

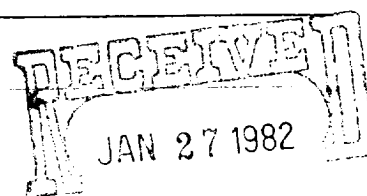

U.S. GEOLOGICAL SURVEY  
ROSWELL, NEW MEXICO