

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

C/SF
SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☐ well ☐ gas ☒ well ☐ other

2. NAME OF OPERATOR

Yates Petroleum Corporation ✓

3. ADDRESS OF OPERATOR

207 South 4th St., Artesia, NM 88210

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.) 990 FNL 1980 FWL, Sec. 31-6S-26E

AT SURFACE:

AT TOP PROD. INTERVAL:

AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐

FRACTURE TREAT ☐

SHOOT OR ACIDIZE ☐

REPAIR WELL ☐

PULL OR ALTER CASING ☐


MULTIPLE COMPLETE ☐

CHANGE ZONES ☐

ABANDON* ☐

(other) ☐

SUBSEQUENT REPORT OF:

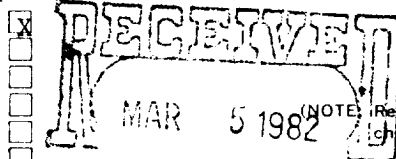

OIL & GAS
U.S. GEOLOGICAL SURVEY
ROSWELL, NEW MEXICO

5. LEASE

NM 2357

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

RECEIVED

8. FARM OR LEASE NAME

Federal HJ

MAR 11 1982

9. WELL NO.

3

O. C. D.

10. FIELD OR WILDCAT NAME ARTESIA, OFFICE

Und. ~~Abc~~ *Perceps Seeps No.*

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA

Unit C, Sec. 31-6S-26E

12. COUNTY OR PARISH

Chaves

13. STATE

NM

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)
3695.6' GR

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Spudded a 12-1/4" hole at 8:00 PM 2-24-82. Ran 21 joints of 8-5/8" 24# J-55 ST&C casing set at 850'. 1-Texas Pattern guide shoe at 850'. Insert auto-fill float set at 810'. Cemented w/800 sacks Class "C" Lite w/1/2#/sack celloseal. PD 6:00 AM 2-27-82. Bumped plug to 750 psi, released pressure and float held okay. Cement did not circulate. WOC 6 hours. Ran Temperature Survey and found top of cement at 450'. Ran 1". Tagged cement at 450'. Circulated 3 sacks to surface. WOC. Drilled out 12:00 midnight 2-27-82. WOC 18 hours. Nipped up and tested to 1000#, okay. Drilled plug and resumed drilling.

Subsurface Safety Valve: Manu. and Type

Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED _____ TITLE Engineering Secty DATE 3-4-82

(This space for Federal or State office use)

APPROVED BY _____

TITLE _____

DATE _____

CONDITIONS OF APPROVAL, IF ANY:

ACCEPTED FOR RECORD

MAR 10 1982

U.S. GEOLOGICAL SURVEY

ROSWELL, NEW MEXICO