



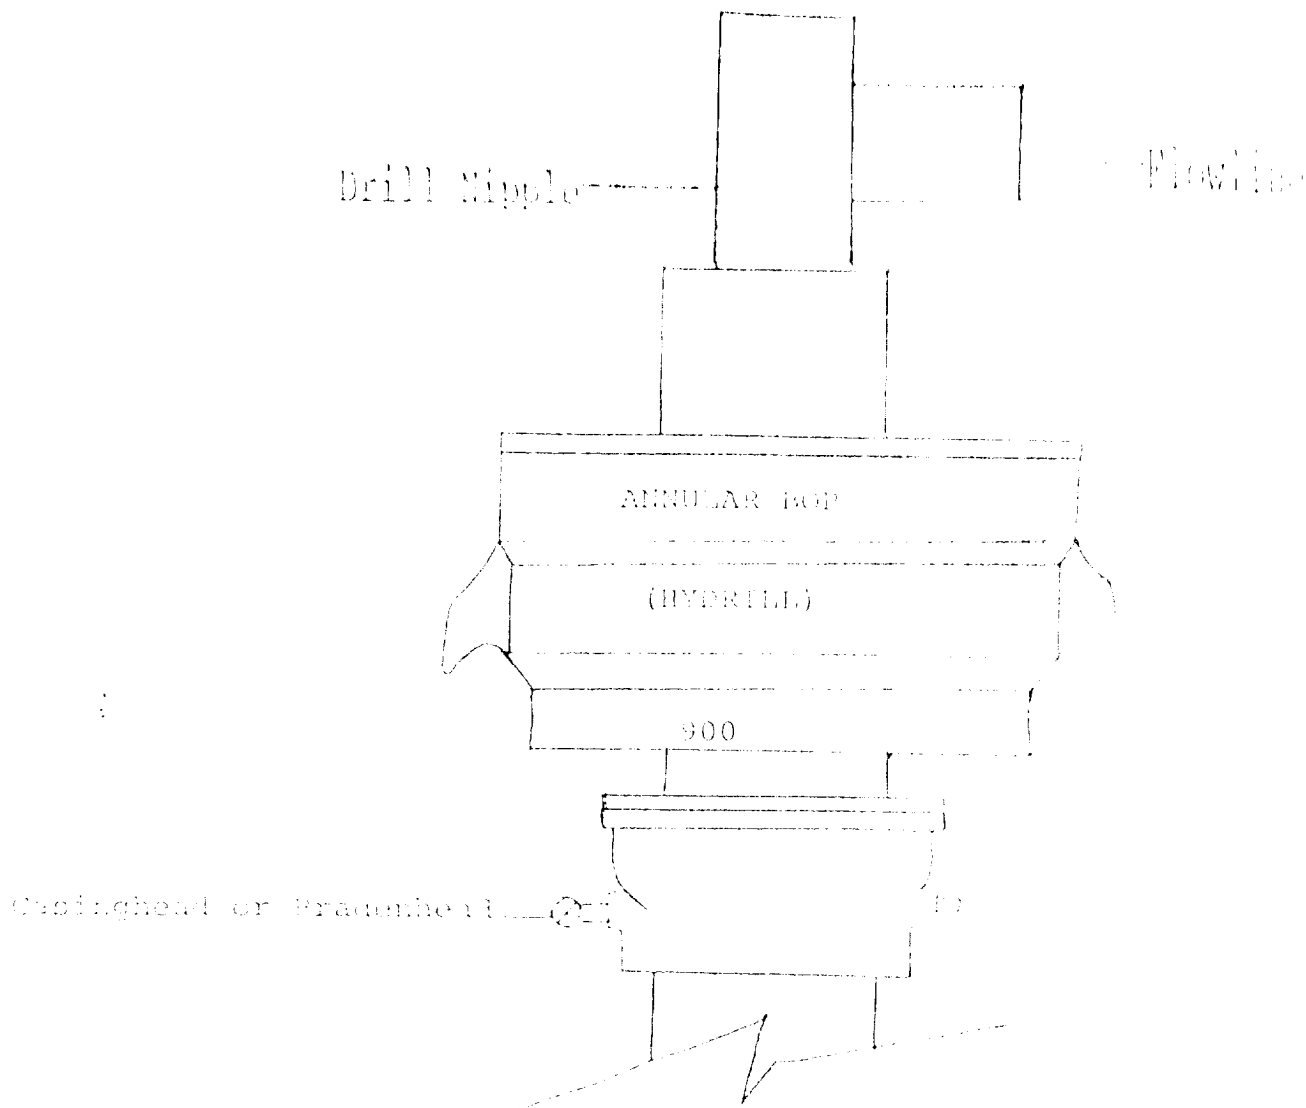

THE FOLLOWING CONSTITUTE MINIMUM BLOWOUT PREVENTER REQUIREMENTS:

1. All preventers to be hydraulically operated with secondary manual controls installed prior to drilling out from under casing.
2. All connections from operating manifolds to preventers to be all steel, hole or tube a minimum of one inch in diameter.
3. The available closing pressure shall be at least 15% in excess of that required with sufficient volume to operate the BOP's.
4. All connections to and from preventer to have a pressure rating equivalent to that of the BOP's.
5. Hole must be kept filled on trips below intermediate casing.

ILLEGIBLE



© Copyrighted Reproduction Prohibited

COUNTY CHAVES FIELD Pecos Slope

STATE NM

OPR YATES PETROLEUM CORP.

APR 30-005-61472

NO 1 LEASE Spool "SU" Com.

MAP

Sec 14, T7S, R25E

COORD

660 FSL, 1980 FWL of Sec

17 mi W/Elkins

SPD

CMP

CSC

WELL CLASS INIT D FIN		LSE CODE	
FORMATION	DATUM	FORMATION	DATUM
TD		PBD	

CONTR

OPERSTLY

3734 GL

sub-s

9-20-82

F.R. 3-22-82

PD 4150 RT (Abo)

AMEND LOCATION: Formerly 1980 PSL,
660 FWL of Sec