YOUNG DRILLING CO.


P. O. BOX 717

FARMINGTON, NEW MEXICO 87401

RECEIVED

MAR 25 1982

SCHEMATIC DRYAING OF BLOWOUT PREVENTER STACK

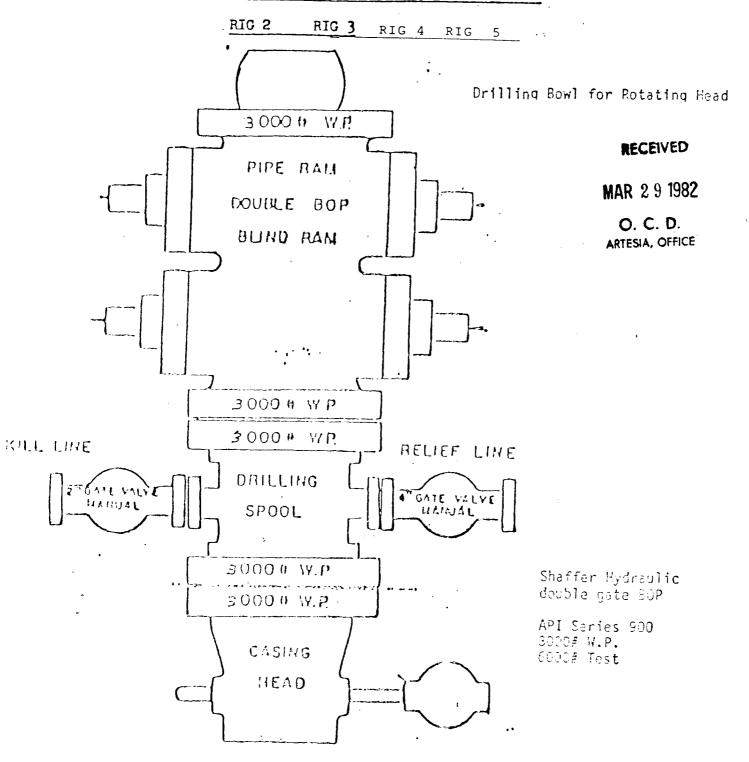

Blowout Preventor: An 8" 3000 psig W.P. double gate hydraulic Shaffer BOP (or equivalent) with drill pipe rams and blind rams. All fill, kill, and choke lines will be minimum of 2" 2000 psi working pressure. The rams will be closed daily and checked for proper operation.