

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

dsf
SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☐ gas ☒ well other

2. NAME OF OPERATOR

Yates Petroleum Corporation

3. ADDRESS OF OPERATOR

207 South 4th St., Artesia, NM 88210

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)

AT SURFACE: 990 FNL & 1980 FEL, Sec. 1-5S-24E

AT TOP PROD. INTERVAL:

AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF

FRACTURE TREAT

SHOOT OR ACIDIZE

REPAIR WELL

PULL OR ALTER CASING


MULTIPLE COMPLETE

CHANGE ZONES

ABANDON*

(other)

SUBSEQUENT REPORT OF:

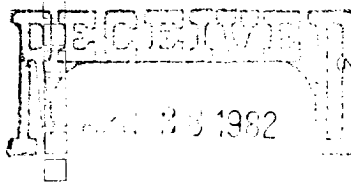

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Spudded 12-1/4" hole 3:30 PM 4-17-82. Ran 21 joints of 8-5/8" 24# J-55 casing set at 825'. 1-Texas Pattern notched guide shoe at 825'. Regular insert float at 785'. Cemented w/400 sacks Pacesetter Lite w/3% CaCl₂. Tailed in w/300 sacks Class "C" 2% CaCl. Compressive strength of cement- 1250 psi, released pressure and float held okay. Cement circulated 50 sacks to pit. WOC. Drilled out 5:30 PM 4-19-82. WOC 18 hours. Nippled up and tested to 1000 psi, okay. Reduced hole to 7-7/8". Drilled plug and resumed drilling.

Subsurface Safety Valve: Manu. and Type

18. I hereby certify that the foregoing is true and correct

SIGNED [Signature] TITLE Engineering Secty DATE 4-27-82

(This space for Federal or State office use)

APPROVED BY _____ TITLE _____
CONDITIONS OF APPROVAL, IF ANY

