

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☐ gas ☒ other ☐
2. NAME OF OPERATOR
Stevens Operating Corporation
3. ADDRESS OF OPERATOR
P. O. Box 2408, Roswell, NM 88201
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 660 FNL, 660 FEL, S 28-7S-26E
AT TOP PROD. INTERVAL: same
AT TOTAL DEPTH: same

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:	SUBSEQUENT REPORT OF:
TEST WATER SHUT-OFF <input type="checkbox"/>	<input type="checkbox"/>
FRACTURE TREAT <input type="checkbox"/>	<input type="checkbox"/>
SHOOT OR ACIDIZE <input type="checkbox"/>	<input checked="" type="checkbox"/>
REPAIR WELL <input type="checkbox"/>	<input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	<input type="checkbox"/>
MULTIPLE COMPLETE <input type="checkbox"/>	<input type="checkbox"/>
CHANGE ZONES <input type="checkbox"/>	<input type="checkbox"/>
ABANDON* <input type="checkbox"/>	<input type="checkbox"/>
(other) Completion <input type="checkbox"/>	

5. LEASE
NM-022584
6. IF INDIAN, ALLOTTEE OR TRIBE NAME
N/A
7. UNIT AGREEMENT NAME
N/A
8. FARM OR LEASE NAME
Sun Federal OCT 19 1982
9. WELL NO.
4 O. C. D.
10. FIELD OR WILDCAT NAME, OFFICE
Undesignated - Artesia
11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Sec 28, T-7-S, R-26-E
12. COUNTY OR PARISH
Chaves
13. STATE
New Mexico
14. API NO.
15. ELEVATIONS (SHOW DF, KDB, AND WD)
3753.2 GR

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

- 6-24-82 Perf at 4460, 60.5, 62.5, 63, 65, 65.5, 66, 66.5, 67, 67.5, 68, 70.5, 71, 17.5, 72. PBTD 4484'.
- 6-25-82 New PBTD 4510 GL. Ran 144 jts 2 3/8" tbg, set at 4476'.
- 6-26-82 Ran 141 jts 2 3/8" tbg, set packer at 4384.30 (76' above top perf) Acid w/35000 gal 7 1/2% abo acid and 20 balls. Avg trtg press 3500# at 6.2 bpm, max trtg press 4100# at 6.8 bpm.


XC: MMS(orig + 6), FILE, PARTNERS ()

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED Pat Thompson TITLE Prod Coordinator DATE July 6, 1982
Pat Thompson FOR RECORD

(ORIG. SGD.) DAVID R. GLASS
(This space for Federal or State office use)
APPROVED BY _____ DATE _____
CONDITIONS OF APPROVAL _____
OCT 15 1982
U.S. GEOLOGICAL SURVEY
ROSWELL, NEW MEXICO
See Instructions on Reverse Side

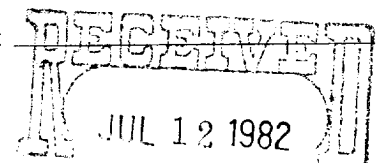

OIL & GAS
U.S. GEOLOGICAL SURVEY
ROSWELL, NEW MEXICO