

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well ☐ gas well ☒ other ☐  
2. NAME OF OPERATOR  
MESA PETROLEUM CO. ✓  
3. ADDRESS OF OPERATOR  
1000 VAUGHN BUILDING/MIDLAND TX 79701-4493  
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)  
1650' FSL & 1875' FWL  
AT SURFACE:  
AT TOP PROD. INTERVAL:  
AT TOTAL DEPTH: SAME  
16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:	SUBSEQUENT REPORT OF:
TEST WATER SHUT-OFF <input type="checkbox"/>	<input type="checkbox"/>
FRACTURE TREAT <input type="checkbox"/>	<input type="checkbox"/>
SHOOT OR ACIDIZE <input type="checkbox"/>	<input type="checkbox"/>
REPAIR WELL <input type="checkbox"/>	<input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	<input type="checkbox"/>
MULTIPLE COMPLETE <input type="checkbox"/>	<input type="checkbox"/>
CHANGE ZONES <input type="checkbox"/>	<input type="checkbox"/>
ABANDON* <input type="checkbox"/>	<input type="checkbox"/>
(other) TD, 4½" csg & cmt	

5. LEASE  
NM-36648  
6. IF INDIAN, ALLOTTEE OR TRIBE NAME  
7. UNIT AGREEMENT NAME RECEIVED  
8. FARM OR LEASE NAME  
CHINA FEDERAL OCT 18 1982  
9. WELL NO.  
7 O. C. D.  
10. FIELD OR WILDCAT NAME  
UNDESIGNATED ABO ARTESIA, OFFICE  
11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA  
SEC 18, T7S, R23E  
12. COUNTY OR PARISH  
CHAVES  
13. STATE  
NEW MEXICO  
14. API NO.  
15. ELEVATIONS (SHOW DF, KDB, AND WD)  
4102' GR

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

Drilled 7 7/8" hole to TD of 3206' on 6-5-82. Ran 77 jts 4½", 10.5#, K-55 casing set at 3200'. Cemented with 350 sxs Class "C" + 5#/sx KCL + 3/10% Halad-4 + 2/10% CFR-2. PD at 10:30 PM, 6-5-82. Cement did not circulate. Released rig at 2:00 AM, 6-6-82. WOCU estimated to arrive 6-14-82.

XC: MMS (7), TLS, CEN RCDS, ACCTG, MEC, ROSWELL, REM, FILE, (PARTNERS )

Subsurface Safety Valve: Manu. and Type \_\_\_\_\_ Set @ \_\_\_\_\_ Ft.


18. I hereby certify that the foregoing is true and correct. REGULATORY COORDINATOR 6-8-82

SIGNED R. E. Mack TITLE \_\_\_\_\_ DATE \_\_\_\_\_

APPROVED BY \_\_\_\_\_ DATE \_\_\_\_\_  
CONDITIONS OF APPROVAL, IF ANY:

ACCEPTED FOR RECORD  
(ORIG. SGD.) DAVID R. GLASS  
OCT 15 1982  
U.S. GEOLOGICAL SURVEY  
ROSWELL, NEW MEXICO

See Instructions on Reverse Side

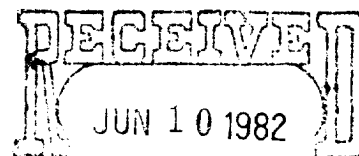

OIL & GAS  
U.S. GEOLOGICAL SURVEY  
ROSWELL, NEW MEXICO