

	~151
Submit 3 Copies To Appropriate District  State of New Mexico	Form C-103
Office Energy, Minerals and Natural Resources	Revised March 25, 1999 WELL API NO.
District II  OIL CONSERVATION DIVISION	30005-61655
No South First, Artesia, NM 88210  District III  2040 South Pacheco	5. Indicate Type of Lease
1000 Rio Brazos Rd., Aztec, NM 87410 District IV Santa Fe, NM 87505	STATE FEE 6. State Oil & Gas Lease No.
2040 South Pacheco, Santa Fe, NM 87505	
SUNDRY NOTICES AND REPORTS ON WELLS  (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)  1. Type of Well:	7. Lease Name or Unit Agreement Name: Twin Lakes San Andres Unit
Oil Well Gas Well Other Injection  2. Name of Operator	7. Well No.
Concho Oil & Gas Corp.	115
3. Address of Operator 110 W. Louisiana Ste 410; Midland, Tx 79701	8. Pool name or Wildcat Twin Lakes; San Andres (Assoc)
4. Well Location	
Unit Letter P: 330 Feet from the South line and 330 feet from the East line	
Section 12 Township 9S Range 28E	NMPM Chaves County
10. Elevation (Show whether DR, RKB, RT, G. 3967.0 GR	R, etc.)
11. Check Appropriate Box to Indicate Nature of Not	ice, Report or Other Data
	SUBSEQUENT REPORT OF: WORK   ALTERING CASING   OUTPITED  THE STATE OF
YEN ON WINDERSON IN CONTROL OF THE PROPERTY OF	<u></u>
TEMPORARILY ABANDON CHANGE PLANS COMMENCE	E DRILLING OPNS.  PLUG AND ABANDONMENT
PULL OR ALTER CASING	
OTHER: OTHER:	
12. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompilation.	
Concho Oil & Gas Corp. respectfully request approval to plug and abandon the above well according to the following procedure:	
<ol> <li>Notify the NMOCD Artesia District 24 hours prior to commencement.</li> <li>Set 125' cmt plug @ 2625-2750'. WOC &amp; tag.</li> </ol>	
2. Set 125' cmt plug @ 2625-2750'. WOC & tag.  3. Circ hole w/ mud.  4. Set 100' cmt plug @ 1985-2085'.  Perf @ 1625' & set 100' cmt plug @ 1575-1675'.	19 10 17 18 7g
4. Set 100' cmt plug @ 1985-2085'.  5. Perf @ 1625' & set 100' cmt plug @ 1575-1675'.	range in the second of the sec
6. Perf @ 910' & set 100' cmt plug @ 860-960'.	
7. 180 Perf @ 180. Circ cmt from 180 to surface.  8. Cut off wellhead & install P&A marker.	RECEIVESIA
8. Cut off wellhead & install P&A marker.	300 · Mi
I hereby certify that the information above is true and complete to the best of my know	owledge and belief.
SIGNATURE TITLE Production	
Type or print name Terri Stathem Telephone No	. 915/683-7443
(This space for State use)	10 10
APPPROVED BY TITLE	DATE DATE
APPPROVED BY	

## TLSAU #115



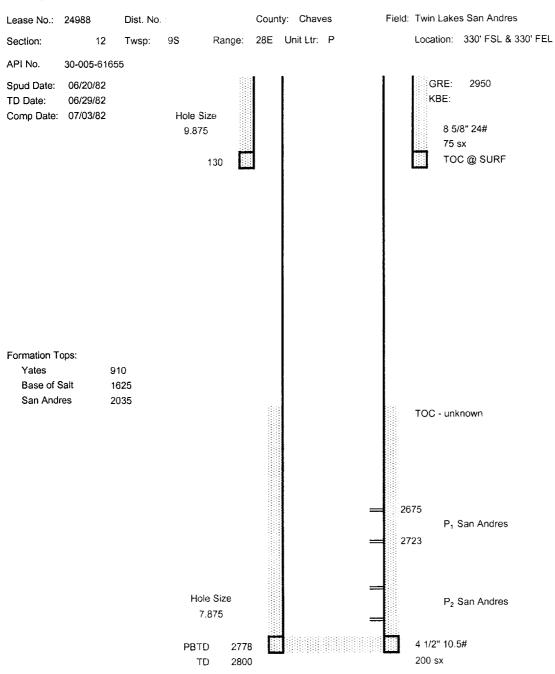

Original Perf Details: P1: 2685, 85.5, 86, 93.5, 94, 94.5, 2700, 00.5, 05.5, 06, 06.5, 10, 10.5, 11

7000 gals 28% acid

May-90 Add P1: 2675, 76, 77, 2722, 23

Acid xylene wash