


UNITED STATES NM OIL CONS. COMMISSION
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Form Approved
Bureau of Land Management

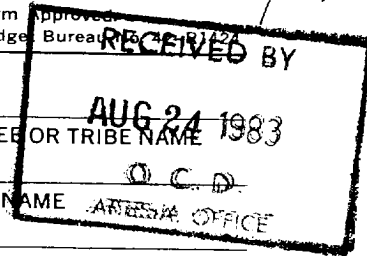

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well ☐ gas well ☒ other

2. NAME OF OPERATOR
Mesa Petroleum Co.

3. ADDRESS OF OPERATOR
P.O. Box 2009 / Amarillo, Texas 79189

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 1444' FSL & 1950' FWL
AT TOP PROD. INTERVAL:
AT TOTAL DEPTH: same

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:	SUBSEQUENT REPORT OF:
TEST WATER SHUT-OFF <input type="checkbox"/>	<input type="checkbox"/>
FRACTURE TREAT <input type="checkbox"/>	<input type="checkbox"/>
SHOOT OR ACIDIZE <input type="checkbox"/>	<input type="checkbox"/>
REPAIR WELL <input type="checkbox"/>	<input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	<input type="checkbox"/>
MULTIPLE COMPLETE <input type="checkbox"/>	<input type="checkbox"/>
CHANGE ZONES <input type="checkbox"/>	<input type="checkbox"/>
ABANDON* <input type="checkbox"/>	<input type="checkbox"/>
(other) TD, 4 1/2" CSG & Cement	

5. LEASE
NM-36648

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME
China Federal

9. WELL NO.
15

10. FIELD OR WILDCAT NAME
West Pecos Slope ABO

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Sec. 19, T7S, R23E

12. COUNTY OR PARISH
Chaves

13. STATE
New Mexico

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)
3958' GR

RECEIVED
(NOTE: Report results of multiple completion or zone change on Form 9-330.)
MAY 3 1983
OIL & GAS

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, include locations and measured and true vertical depths for all markers and zones pertinent to this work.)

Drilled 7 7/8" hole to TD of 3150' on 4-28-83. Ran 82 jts 4 1/2", 10.5#, K55, ST&C CSG set at 3150'. Cemented with 400 sx "C" + 5# KCL + 2/10% D-31 + 3/10% D-19. PD at 1700 4-29-83. Cement did not circulate. Released rig at 2100 4-29-83. WOCU.

XC: BLM-R (O+6), CEN RCDS, ACCTG, MAT CONT, OPS(FILE), MIDLAND, ROSWELL, PARTNERS
Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED R. F. Martin TITLE REGULATORY COORDINATOR DATE MAY 2, 1983

ACCEPTED FOR RECORD (This space for Federal or State office use)

APPROVED BY (ORIG. SGD.) DAVID R. GLASS

CONDITIONS OF APPROVAL AUG 23 1983

ROSWELL, NEW MEXICO