

NM OIL CONS. COMMISSION  
Drawer DD  
Artesia, Nm 88210RECEIVED  
SUBMIT IN TRIPLICATE\*  
(Other instructions on  
reverse side)Form approved.  
Budget Bureau No. 42-R1425UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

JUN 28 1982

O. C. D.

30-005-61679

## APPLICATION FOR PERMIT TO DRILL, DEEPEN, OR PLUG BACK

## 1a. TYPE OF WORK

DRILL ☒DEEPEN ☐PLUG BACK ☐

## b. TYPE OF WELL

OIL  
WELL ☐GAS  
WELL ☒

OTHER

SINGLE  
ZONE ☒MULTIPLE  
ZONE ☐

## 2. NAME OF OPERATOR

MESA PETROLEUM CO.

## 3. ADDRESS OF OPERATOR

1000 VAUGHN BUILDING/MIDLAND, TEXAS 79701-4493

## 4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.\*)

At surface

1550' FNL &amp; 2080' FEL

At proposed prod. zone

SAME

## 14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE\*

26 miles Northwest of Roswell, New Mexico

## 15. DISTANCE FROM PROPOSED\*

LOCATION TO NEAREST

PROPERTY OR LEASE LINE, FT.

(Also to nearest drlg. unit line, if any)

270' / 1550'

## 18. DISTANCE FROM PROPOSED LOCATION\*

TO NEAREST WELL, DRILLING, COMPLETED,  
OR APPLIED FOR, ON THIS LEASE, FT.

1400'

## 16. NO. OF ACRES IN LEASE

2459.68

## 19. PROPOSED DEPTH

3400'

17. NO. OF ACRES ASSIGNED  
TO THIS WELL

160

## 20. ROTARY OR CABLE TOOLS

ROTARY

## 21. ELEVATIONS (Show whether DF, RT, GR, etc.)

3978' GR

## 22. APPROX. DATE WORK WILL START\*

JULY 7, 1982


## 23.

## PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
12 1/4"	8 5/8"	24#	1400'	700/300 SURFACE
7 7/8"	4 1/2"	10.5#	3400'	300 COVER ALL PAY

Propose to drill 12 1/4" hole to approximately 1400' to set 8 5/8" surface casing and cement to surface. Will nipple up ram type BOP's and reduce hole to 7 7/8" to drill to total depth. Drilling medium will be air, foam, or mud as required. After log evaluation, 4 1/2" casing may be run and cemented with sufficient kinds and amounts to isolate and seal off any fresh water, oil or gas zones encountered.

Operator's Gas Sales are dedicated.

OIL & GAS  
U.S. GEOLOGICAL SURVEY  
ROSWELL, NEW MEXICO

XC: MMS (7), TLS, CEN RCDS, ACCTG, MEC, LAND, ROSWELL, REM, FILE, (PARTNERS)  
IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen or plug back, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

## 24.

SIGNED

TITLE

REGULATORY COORDINATOR

DATE

6-3-82

(This space for Federal or State office use)

APPROVED

(Orig. Sgd.) GEORGE H. STEWART

PERMIT NO.

APPROVAL DATE

JUN 25 1982

APPROVED BY

TITLE

DATE

CONDITIONS

OF APPROVAL, IF ANY:

JAMES A. CULHAM  
DISTRICT SUPERVISOR

APPROVAL FOR NON-STD LOC.

NSH-1542  
6-28-82

All distances must be from the outer boundaries of the Section.


Operator <b>Mesa Petroleum Co.</b>		Lease <b>China Federal Com</b>		Well No. <b>#10</b>
Drill Letter <b>G</b>	Section <b>17</b>	Township <b>7 South</b>	Range <b>23 East</b>	County <b>Chaves</b>
Actual Footage Location of Well: <b>1550</b> feet from the <b>North</b> line and <b>2080</b> feet from the <b>East</b> line				
Ground Level Elev. <b>3978</b>	Producing Formation <b>ABO</b>	Pool <b>UNDESIGNATED</b>	Dedicated Acreage: <b>NE/4 160 Acres</b>	

1. Outline the acreage dedicated to the subject well by colored pencil or hachure marks on the plat below.
2. If more than one lease is dedicated to the well, outline each and identify the ownership thereof (both as to working interest and royalty).
3. If more than one lease of different ownership is dedicated to the well, have the interests of all owners been consolidated by communitization, unitization, force-pooling, etc?

☐ Yes ☐ No If answer is "yes," type of consolidation COMMUNITIZATION IN PROGRESS

If answer is "no," list the owners and tract descriptions which have actually been consolidated. (Use reverse side of this form if necessary.)

No allowable will be assigned to the well until all interests have been consolidated (by communitization, unitization, forced-pooling, or otherwise) or until a non-standard unit, eliminating such interests, has been approved by the Division.

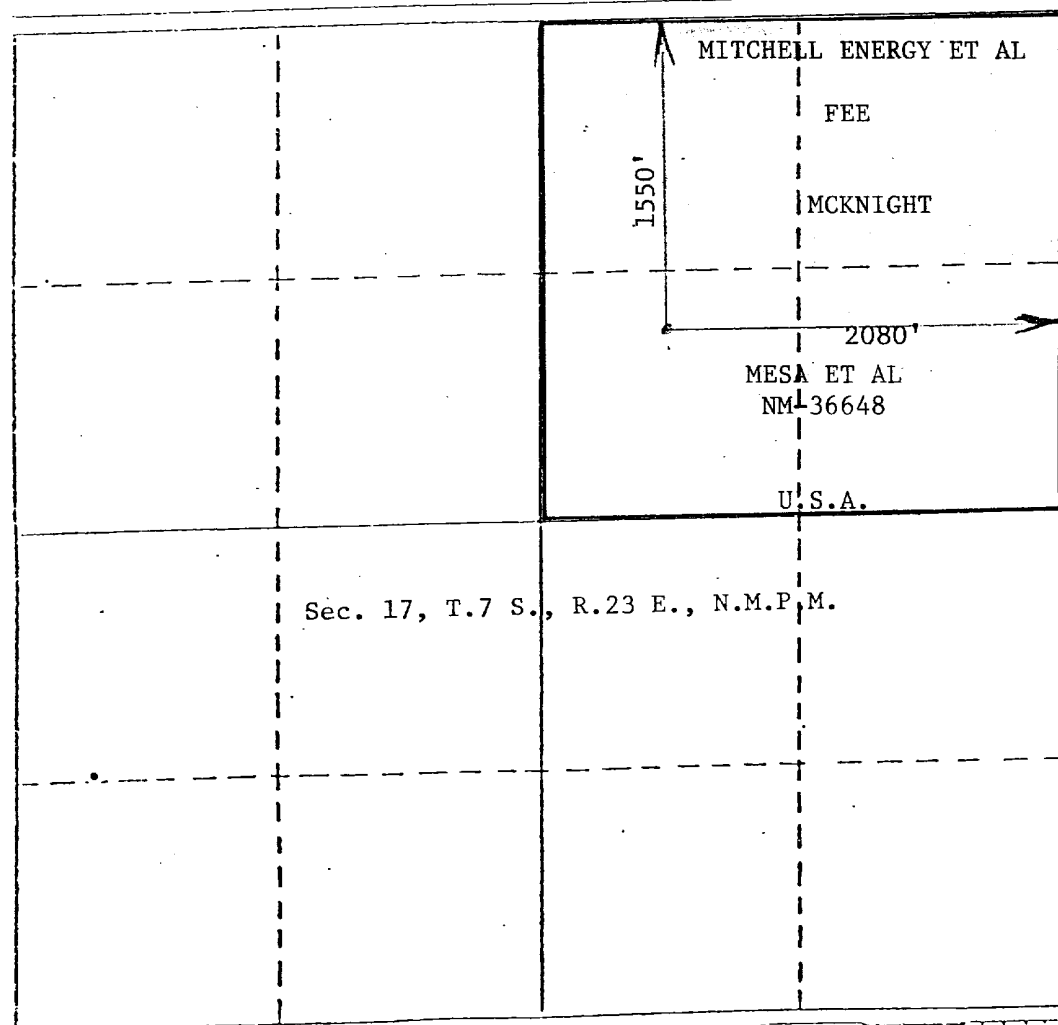

CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief.

*[Signature]*

Name

**R. E. MATHIS**

Position

**REGULATORY COORDINATOR**

Company

**MESA PETROLEUM CO.**

Date

**JUNE 3, 1982**

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my knowledge and belief.

Date Surveyed

**May 24, 1982**

Registered Professional Engineer and/or Land Surveyor

**JOHN D. JAQUESS**  
REGISTERED PROFESSIONAL ENGINEER AND LAND SURVEYOR

Certificate No. **6290**

APPLICATION FOR PERMIT TO DRILL

MESA PETROLEUM CO.  
CHINA FED COM #10  
1550' FNL & 2080' FEL, SEC 17, T7S, R23E  
CHAVES COUNTY, NEW MEXICO

LEASE NO. NM-36648

In conjunction with Form 9331-C, Application For Permit to Drill subject well, the following additional information is provided:

1. Applicable portions of the GENERAL REQUIREMENTS FOR OIL AND GAS OPERATIONS ON FEDERAL LEASES, Roswell District, Geological Survey of September 1, 1980 will be adhered to.

2. Geological markers are estimated as follows:

SEVEN RIVERS	Surface
SAN ANDRES	513'
GLORIETA	691'
TUBB	2093'
ABO	2674'


3. Hydrocarbon bearing strata may occur in the Abo formation(s). No fresh water is expected to be encountered below 1400'.

4. The Casing and Blowout Preventer Program will be determined by hole conditions as encountered. See Exhibit VI. Anticipate drilling with air or foam using ram type preventer and rotating head for well control. The 8 5/8" casing will be set at approximately 1400' to protect any fresh water zones and cemented to the surface. The 4 1/2" production casing will be set at total depth or shallower depending upon the depth of the deepest commercial hydrocarbon bearing strata encountered. Sufficient amounts and kinds of cement would be used to ensure any water, gas, or oil zones encountered are isolated and shut off down to the casing point if run.


5. No drill stem test or coring program is planned. The logging program may consist of a GR-CNL from surface total depth and FDC from casing point to total depth.

6. Anticipated drilling time is ten days with completion operations to follow as soon as a completion unit is available.

# Blow-out Preventers hydrill and choke manifold are oil 900 Series

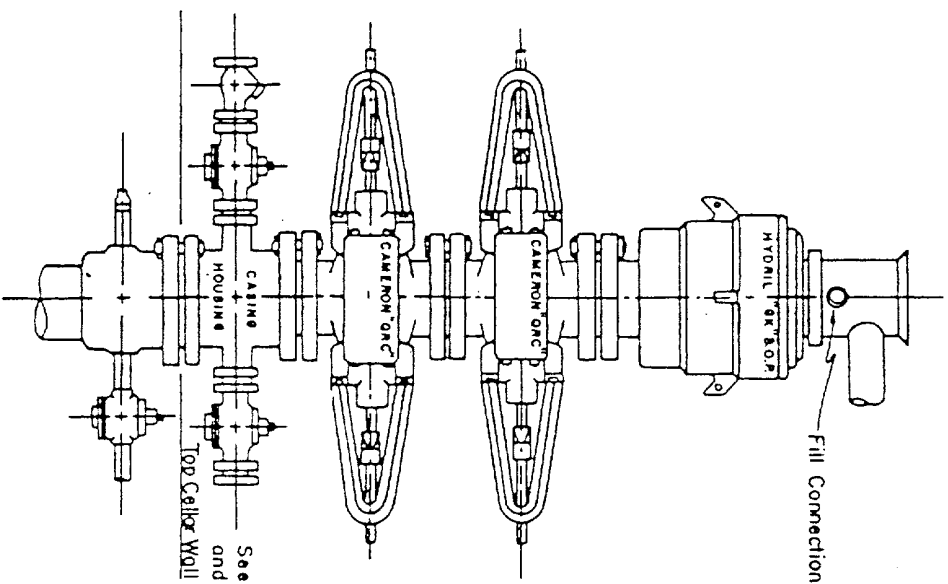

3,000 PSI WORKING PRESSURE  
BLOW-OUT PREVENTER HOOK-UP

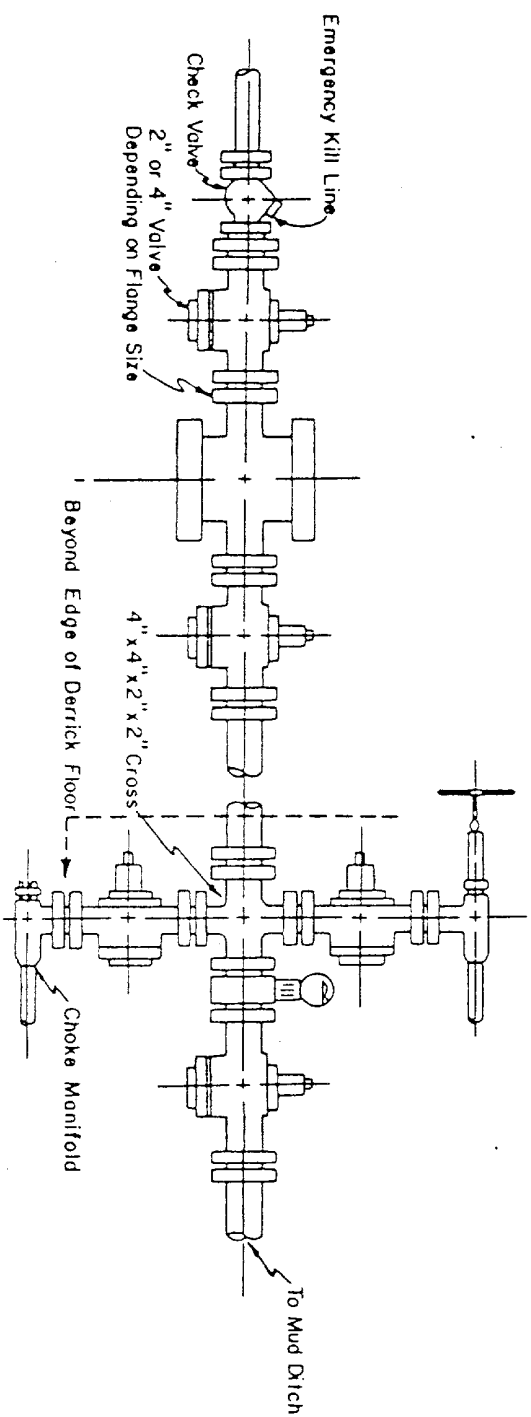

## 3,000 PSI WORKING PRESSURE KILL, CHOKE, AND FILL CONNECTIONS

### DETAIL OF 4" FLOW LINE CHOKE ASSEMBLY

Minimum assembly for 3,000 PSI working pressure will consist of three preventers.  
The bottom and middle preventers may be Cameron.

NOTE: HYDRILL not installed on shallow-low pressure wells.  
RAM type BOPs are API 10" X 3000 PSI



E X H I B I T  
V I

DATE	BY
REVISION	DATE
APPROVED	SIGNED