

Dec. 1973

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

OIL CONS. COMMISSION
Drawer DD
Artesia, NM 88210

Budget Bureau No. 42-ri424

c/sr

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

RECEIVED

1. oil well ☐ gas well ☒ other ☐
2. NAME OF OPERATOR
MESA PETROLEUM CO. V
3. ADDRESS OF OPERATOR
1000 VAUGHN BUILDING/MIARTESIA, OFFICE 701-4493
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
1550' FNL & 2080' FEL
AT SURFACE:
AT TOP PROD. INTERVAL:
AT TOTAL DEPTH: SAME
16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

SEP 29 1982

O. C. D.

- REQUEST FOR APPROVAL TO: SUBSEQUENT REPORT OF:
- TEST WATER SHUT-OFF ☐ ☐
- FRACTURE TREAT ☐ ☐
- SHOOT OR ACIDIZE ☐ ☐
- REPAIR WELL ☐ ☐
- PULL OR ALTER CASING ☐ ☐
- MULTIPLE COMPLETE ☐ ☐
- CHANGE ZONES ☐ ☐
- ABANDON* ☐ ☐
- (other) Spud, 8 5/8" csg & cmt ☐ ☐

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Spudded well with 12 1/4" hole on 6-30-82. Drilled to 1514' and ran 37 jts 8 5/8", 24#, K-55 casing set at 1514'. Cemented with 700 sxs Thixset + 4% CaCl and tailed in with 200 sxs Class "C" + 2% CaCl. PD at 6:00 PM, 7-1-82. Cement did not circulate. Ran temperature survey -- TOC at 690'. Set plugs #1 - #4 with a total of 400 sxs Dowell RFC Thermotopic. Cement did not circ. Set plugs #5 - #8 with a total of 850 sxs Class "C" + 4% CaCl. Circulated 15 sxs to surface. Tested blind rams to 600 psi for 30 mins -- held OK. Reduced hole to 7 7/8" hole to continue drilling on 7-3-82. WOC a total of 32 hours and secondary cementing.

XC: MMS (7), TLS, CEN RCDS, ACCTG, MEC, ROSWELL, REM, FILE, (PARTNERS)

Subsurface Safety Valve: Manu. and Type

Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

DIV DRILLING SUPERVISOR 7-7-82

SIGNED William R. Mientz


TITLE _____

DATE _____

(This space for Federal or State office use)

ACCEPTED FOR RECORD
APPROVED BY
CONDITIONS OF APPROVAL IF ANY
SEP 28 1982
U.S. GEOLOGICAL SURVEY
ROSWELL, NEW MEXICO

*See Instructions on Reverse Side

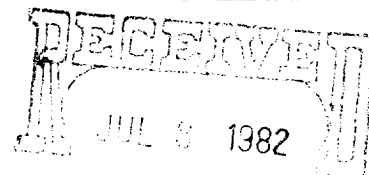

OIL & GAS
U.S. GEOLOGICAL SURVEY
ROSWELL, NEW MEXICO