

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Drawer DD

Artesia, NM 88210

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well ☐ gas well ☒ other ☐ OCT 5 1982
2. NAME OF OPERATOR
Mesa Petroleum Co. ✓ O. C. D.
3. ADDRESS OF OPERATOR
P.O. Box 2009 / Amarillo, Texas 79189
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 860' FNL & 1780' FEL
AT TOP PROD. INTERVAL:
AT TOTAL DEPTH:
16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO: SUBSEQUENT REPORT OF:

TEST WATER SHUT-OFF	<input type="checkbox"/>	<input type="checkbox"/>
FRACTURE TREAT	<input type="checkbox"/>	<input type="checkbox"/>
SHOOT OR ACIDIZE	<input type="checkbox"/>	<input type="checkbox"/>
REPAIR WELL	<input type="checkbox"/>	<input type="checkbox"/>
PULL OR ALTER CASING	<input type="checkbox"/>	<input type="checkbox"/>
MULTIPLE COMPLETE	<input type="checkbox"/>	<input type="checkbox"/>
CHANGE ZONES	<input type="checkbox"/>	<input type="checkbox"/>
ABANDON*	<input type="checkbox"/>	<input type="checkbox"/>


(other) Spud, 8-5/8" CSG & Cement

5. LEASE
NM-36602
6. IF INDIAN, ALLOTTEE OR TRIBE NAME
7. UNIT AGREEMENT NAME
8. FARM OR LEASE NAME
Corn Federal
9. WELL NO.
1
10. FIELD OR WILDCAT NAME
Wildcat ABO
11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Sec 33, T9S, R22E
12. COUNTY OR PARISH
Chaves
13. STATE
New Mexico
14. API NO.
15. ELEVATIONS (SHOW DF, KDB, AND WD)
4285' GR

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Spudded well with 12-1/4" hole on 9-14-82. Drilled with air to 140' and hit FW at 3 to 4 BPM. Drilled with air-mist to 1419' and ran 32 jts 8-5/8", 24#, K-55 Casing set at 1418'. Cemented with 700 SX "C" + 10% Gypseal + 4% Cacl and tailed in with 200 SX "C" + 2% Cacl. PD at 9:30 p.m. 9-15-82. Cement did not circulate. Ran temp survey - - TOC at 625'. Set seven plugs with a total of 650 SX "C" + 4% Cacl to circulate cement. Tested BOPs and casing to 600 psi for 30 min - - ok. Reduced hole to 7-7/8" and drilled ahead on 9-17-82. WOC to total of 33 hours.

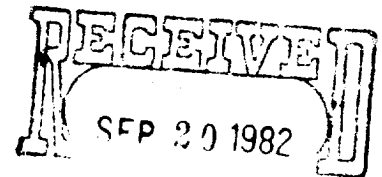

Subsurface Safety Valve: Manu. and Type

18. I hereby certify that the foregoing is true and correct

SIGNED R. P. Mack TITLE Regulatory Coordinator DATE 9-17-82

Set @ OIL & GAS Ft.
U.S. GEOLOGICAL SURVEY
ROSWELL, NEW MEXICO

ACCEPTED FOR RECORD (space for Federal or State office use)	
APPROVED BY CONDITIONS OF APPROVAL, IF ANY:	TITLE DATE
OCT 4 1982	
XC: MMS-R (6), TLS, CEN RCDS, ACCTG, REM (FILE), MIDLAND, ROSWELL, PARTNERS ()	
U.S. GEOLOGICAL SURVEY ROSWELL, NEW MEXICO	

See Instructions on Reverse Side