

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

NM Oil Cons. Commission
Drawer DD
Artesia, NM 88210

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

RECEIVED

NOV 19 1992

O. C. D.
Artesia, NM

1. Type of Well
☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator
YATES PETROLEUM CORPORATION ✓ (505) 748-1471

3. Address and Telephone No.
105 South 4th St., Artesia, NM 88210

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
Unit E, 1980' FNL & 660' FWL, Sec. 33-T8S-R26E

5. Lease Designation and Serial No.
NM 29623

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.
Filaree AEL Fed. Com #3

9. API Well No.
30-005-62913

10. Field and Pool, or Exploratory Area
Pecos Slope Abo

11. County or Parish, State
Chaves, NM

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☐ Notice of Intent
- ☒ Subsequent Report
- ☐ Final Abandonment Notice

TYPE OF ACTION

- ☐ Abandonment
- ☐ Recompletion
- ☐ Plugging Back
- ☐ Casing Repair
- ☐ Altering Casing
- ☐ Other
- ☐ Change of Plans
- ☐ New Construction
- ☐ Non-Routine Fracturing
- ☒ Water Shut-Off
- ☐ Conversion to Injection
- ☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Spudded 26" starting hole 11:45 PM 11-5-92 to 40'. Set 40' of 20" conductor. Redi-mix to surface. Resumed drilling 12-1/4" hole 11:45 AM 11-7-92. Ran 27 joints 8-5/8" 24# J-55 ST&C casing set at 1100'. Guide shoe set at 1100', insert float set 1056'. Cemented w/475 sx PSL w/1/2# Celloseal and 3% CaCl₂ (yield 1.84, wt 12.7). Tailed in w/200 sx "C" w/2% CaCl₂ (yield 1.32, wt 14.8). PD 10:15 PM 11-8-92. Bumped plug to 400 psi, float did not hold. Circulated 15 sacks. NU and tested to 1000 psi for 30 minutes. WOC. Drilled out 11:00 AM 11-9-92. WOC 12 hours and 45 minutes. Reduced hole to 7-7/8" and resumed drilling.

14. I hereby certify that the foregoing is true and correct

Signed Peter W. Chester
(This space for Federal or State office use)

Title Production Supervisor


Date 11-10-92

Approved by _____
Conditions of approval, if any:

Title _____

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*See Instruction on Reverse Side

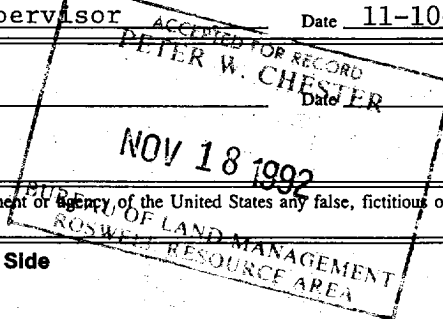

1914

1915

1916

