

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

NM Oil Cons. Commission
Drawer: DD
Artesia, NM 88210

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a dry reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

SEP 29 '94

Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

O. C. D.

Name of Operator

YATES PETROLEUM CORPORATION

(505) 748-1471

ARTESIA, OFFICE

Address and Telephone No.

105 South 4th St., Artesia, NM 88210

Location of Well (Footage, Sec., T., R., M., or Survey Description)

1980' FSL & 990' FWL of Section 21-T8S-R22E (Unit L, NWSW)

5. Lease Designation and Serial No.

NM-36724

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

Salt Creek Unit #7

9. API Well No.

30-005-62951

10. Field and Pool, or Exploratory Area

West Pecos Slope Abo

11. County or Parish, State

Chaves Co., NM

CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☐ Notice of Intent
☒ Subsequent Report
☐ Final Abandonment Notice

TYPE OF ACTION

- ☐ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☒ Other Surface casing & cement
☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

3. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Reamed 14-3/4" hole to 17-1/2" hole. Finished reaming 17-1/2" hole at 6:00 PM 8-25-94. TD 296'. Ran 6 joints of 13-3/8" 54.5# J-55 (256.27') of casing set at 220'. 1-Texas Pattern notched guide shoe set at 220'. Insert float set at 135'. Cemented with 100 sacks Class H, 12% Thixad, 10#/sack gilsonite, 1/2#/sack celloseal and 2% CaCl2 (yield 1.60, weight 14.6). Tailed in with 300 sacks Class C 2% CaCl2 (yield 1.32, weight 14.8). PD 1:05 AM 8-26-94. Bumped plug to 900 psi, OK. Cement did not circulate. WOC 4 hours. Ran 1". Tagged cement at 170'. Spotted 100 sacks Class C 4% CaCl2. PD 6:00 AM 8-26-94. WOC 1-1/4 hours. Ran 1". Tagged cement at 170'. Spotted 50 sacks Class C 4% CaCl2. PD 8:00 AM 8-26-94. WOC 1 hour. Ran 1". Tagged cement at 130'. Spotted 100 sacks Class C 4% CaCl2. PD 9:30 AM 8-26-94. WOC 1 hour. Ran 1". Tagged cement at 61'. Spotted 100 sacks Class C 4% CaCl2. PD 10:45 AM 8-26-94. Circulated 5 sacks to pit. WOC. Drilled out at 12:30 AM 8-27-94. WOC 23 hours and 25 minutes. Cut off and welded on flow nipple. Reduced hole to 12-1/4". Resumed drilling. NOTE: Could not get 13-3/8" casing past 220'.

14. I hereby certify that the foregoing is true and correct

Signed Rusty Klein
(This space for Federal or State office use)


Title Production Clerk

Date August 30, 1994

Approved by _____
Conditions of approval, if any:

Title _____

Date _____

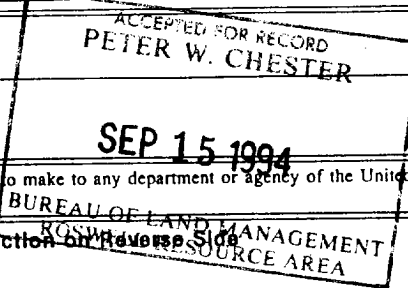

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*See Instruction on Reverse Side

