

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

NM Oil Cons. Commission
Drawer DD
Artesia, NM 88210

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

RECEIVED

Type of Well
☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

YATES PETROLEUM CORPORATION

(505) 748-1471

3. Address and Telephone No.

105 South 4th St., Artesia, NM 88210

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

660' FNL & 1530' FEL of Section 20-T10S-R25E (Unit B, NWNE)

5. Lease Designation and Serial No.

NM-18484

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

Unruh AFF Federal #1

9. API Well No.

30-005-62957

10. Field and Pool, or Exploratory Area

Pecos Slope Abo

11. County or Parish, State

Chaves Co., NM

CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☐ Notice of Intent
☒ Subsequent Report
☐ Final Abandonment Notice

TYPE OF ACTION

- ☐ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☒ Other Spud, resume drilling,
surface casing & cement

- ☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Spudded a 26" hole at 4:15 PM 5-21-94. Set 76' of 20" conductor pipe. Cemented with 160 sacks Class "C" 2% CaCl₂ (yield 1.32, weight 14.8). NOTE: Notified Larry Bray with BLM in Roswell of spud time. Resumed drilling a 17-1/2" hole with rotary tools at 5:00 PM 5-23-94. NOTE: Notified Chuck Hunt with Roswell BLM of resuming drilling.

TD 500'. Ran 12 joints of 13-3/8" 54.5# J-55 (488.83') of casing set at 473'. 1-Texas Pattern notched guide shoe set at 473'. Davis Lynch insert float set at 449'. Cemented with 400 sacks Pacesetter Lite "C", 10#/sack gilsonite, 1/4#/sack celloseal and 3% CaCl₂ (yield 1.98, weigh 12.46). Tailed in with 200 sacks Class "C" 2% CaCl₂ (yield 1.32, weight 14.8). PD 8:45 PM 5-24-94. Bumped plug to 650 psi. Circulated gilsonite (no cement). Ready-Mixed to surface with 12 yards. WOC. Drilled out at 2:45 PM 5-25-95. WOC 18 hours. Cut off and welded on flow nipple. Reduced hole to 12-1/4". Drilled plug and resumed drilling.

14. I hereby certify that the foregoing is true and correct


Signed

Title Production Clerk

(This space for Federal or State office use)

Approved by
Conditions of approval, if any:

Title

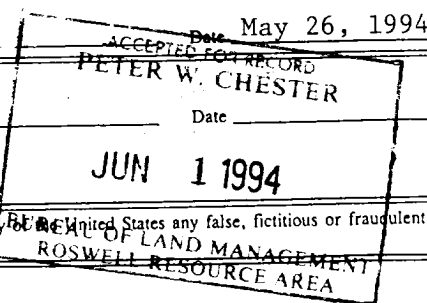

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*See Instruction on Reverse Side