MM 011 Cor 3. Commission Drawer Dir

Artesia, NY 59310

rm 3160-5 ine 1990)

UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

FORM APPROVED


DEPARTMENT OF THE INTERI BUREAU OF LAND MANAGEM		Budget Bureau No. 1004-0135 Expires: March 31, 1993 5. Lease Designation and Serial No.
SUNDRY NOTICES AND REPORTS Of Do not use this form for proposals to drill or to deepen or a Use "APPLICATION FOR PERMIT—" for su	reentry to a different reservoir.	NM 9813 6. If Indian, Allottee or Tribe Name
SUBMIT IN TRIPLICATE		7. If Unit or CA, Agreement Designation
Type of Well Oil Gas Well Well Other		8. Well Name and No.
	505) 748-1471)	South Alkali LK Federal # 9. API Well No.
Address and Telephone No. 105 South 4th St., Artesia, NM 88210		30-005-62995 10. Field and Pool, or Exploratory Area
Unit D, 660' FNL, 990' FWL, Section 1-T6S-R2	- 25E	Pecos Slope Abo 11. County or Parish, State

Type of Well Oil Well X Gas Well Name of Operator YATES PETROLEUM CORPORATION (505) 748-1471)Address and Telephone No. 105 South 4th St., Artesia, NM 88210 Location of Well (Footage, Sec., T., R., M., or Survey Description) Unit D, 660' FNL, 990' FWL, Section 1-T6S-R25E Chaves County, NM CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE REPORT

Abandonment Recompletion Plugging Back Casing Repair Altering Casing Souther Spud, Set Surface Csg	Change of Plans New Construction Non-Routine Fracturing Water Shut-Off Conversion to Injection Dispose Water (Note: Report results of multiple completion on Well
	Plugging Back Casing Repair Altering Casing

give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Spudded 26" hole 12:15 PM 12-7-93. Set 40' of 20" conductor and cemented to surface. Notified BLM, Roswell, NM, of spud. Resumed drilling 14-3/4" hole 3:45 PM 12-17-93. Ran 20 joints 9-5/8" 36# J-55 casing set at 902'. Guide shoe set 902', insert float set 857. Cemented with 500 sx PSL "C" + 1/4#/sx Celloseal + 3% CaCl2 (yield 1.98, wt 12.6). Tailed in with 250 sx "C" + 2% CaCl2 (yield 1.32, wt 14.8). PD 1:30 PM 12-19-93. Bumped plug to 750 psi, float held OK. Circulated 150 sacks. WOC. Drilled out 10:00 AM 12-20-93. WOC 20 hours and 30 minutes. NU and tested to 1000 psi for 15 minutes, OK. Reduced hole and resumed drilling.

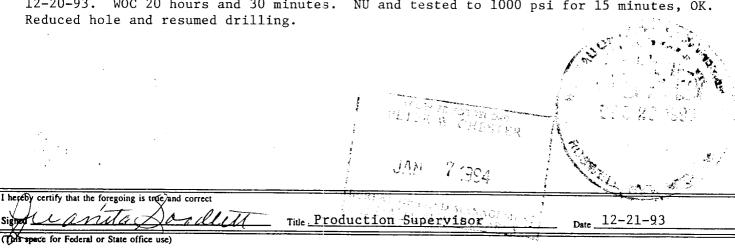

Conditions of approval, if any:

le 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements representations as to any matter within its jurisdiction.

Title