

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

N.M. Oil Cons. Division

811 S. 1st Street

Artesia, NM 88210-8834

FORM APPROVED

Bureau No. 1004-0135

Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals.

SUBMIT IN TRIPLICATE

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

YATES PETROLEUM CORPORATION

(505) 748-1471

3. Address and Telephone No.

105 South 4th St., Artesia, NM 88210

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

1980' FNL & 1980' FWL of Section 13-T7S-R25E (Unit F, SENW)

5. Lease Designation and Serial No.

NM-28162

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

Thorpe MI Fed Com #13

9. API Well No.

30-005-63024

10. Field and Pool, or Exploratory Area

Pecos Slope Abo

11. County or Parish, State

Chaves Co., NM

12. CHECK APPROPRIATE BOX(es) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☐ Notice of Intent
☒ Subsequent Report
☐ Final Abandonment Notice

TYPE OF ACTION

- ☐ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☒ Other Production casing & cmt
☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water


(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Reduced hole to 7-7/8" at 1611'.

TD 4204'. Reached TD at 12:00 AM 11-1-96. Ran 98 joints of 4-1/2" 10.5# 8rd J-55 LT&C (4185.04') of casing landed at 4198'. Regular guide shoe set at 4198'. Float collar set at 4153'. Marker joint set from 3608-3625'. Cemented with 50 sacks "C", 1/4#/sack cello-seal and 3% SMS (yield 1.70, weight 11.4). Tailed in with 300 sacks Super Modified C, 3.28# salt, .31% FL52 & 8#/sack gilsonite (yield 1.69, weight 13.0). PD 3:00 PM 11-1-96. Bumped plug to 650 psi for 3 minutes, OK. WOC. Released rig at 7:00 PM 11-1-96.

Waiting on completion unit.

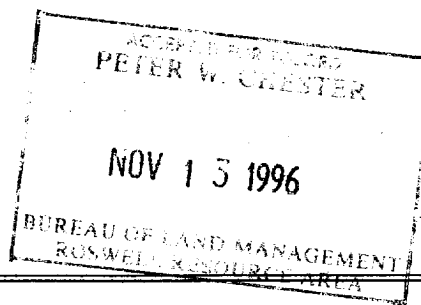

14. I hereby certify that the foregoing is true and correct

Signed

Title Operations Technician

Date Nov. 5, 1996

(This space for Federal or State office use)

Approved by

Title

Date

Conditions of approval, if any: