

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

N.M. Oil Cons. Division FORM APPROVED
811 S. 1st Street
Artesia, NM 88210-2834
Budget Bureau No. 1004-0135
Expires: March 31, 1993
Designation and Serial No.
NM-A-12125

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

DEC 05 '96

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

YATES PETROLEUM CORPORATION

(505) 748-1471

3. Address and Telephone No.

105 South 4th St., Artesia, NM 88210

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

660' FNL & 1980' FWL of Section 25-T7S-R25E (Unit C, NENW)

7. If Unit or CA, Agreement Designation

8. Well Name and No.

Coffman NY Federal #3

9. API Well No.

30-005-63089

10. Field and Pool, or Exploratory Area

Pecos Slope Abo

11. County or Parish, State

Chaves Co., NM

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☐ Notice of Intent
☒ Subsequent Report
☐ Final Abandonment Notice

TYPE OF ACTION


- ☐ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☒ Other Production casing & cmt
☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

TD 4315'. Reached TD at 3:30 AM 11-19-96. Ran 102 joints of 4-1/2" 10.5# 8rd J-55 LT&C (4299.04') of casing set at 4309'. Regular guide shoe set at 4309'. Float collar set at 4255'. Cemented with 50 sacks "C", 1/4#/sack celloseal, .3% SM (yield 2.75, weight 11.4) and 350 sacks Super Modified C, 8#/sack gilsonite, 3.28#/sack salt, .31#/sack FL52, .32#/sack FL25 (yield 1.69, weight 13.0). PD 7:15 PM 11-19-96. Bumped plug to 1300 psi for 3 minutes, OK. WOC. Released rig at 11:15 PM 11-19-96. NOTE: Marker joint set at 3619-3637'.

Waiting on completion unit.

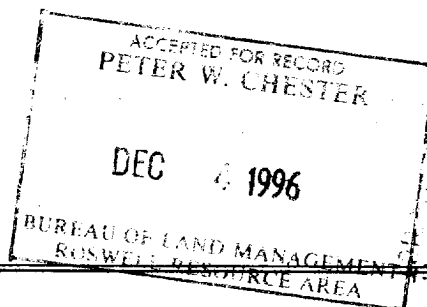

14. I hereby certify that the foregoing is true and correct

Signed

Rusty Allen

Title Operations Technician

Date Nov. 26, 1996

(This space for Federal or State office use)

Approved by

Conditions of approval, if any:

Title

Date