

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

Oil Cons. Division
31st Street
Artesia, NM 88210-2144

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

RECEIVED
OIL CON. DIV.
DIST. 2
MAR 04 1997

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

YATES PETROLEUM CORPORATION

(505) 748-1471

3. Address and Telephone No.

105 South 4th St., Artesia, NM 88210

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

2310' FSL & 990' FEL of Section 19-T6S-R26E (Unit I, NESE)

5. Lease Designation and Serial No.

NM-25473

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

Savage NI Federal #5

9. API Well No.

30-005-63025

10. Field and Pool, or Exploratory Area

Pecos Slope Abo

11. County or Parish, State

Chaves Co., NM

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☐ Notice of Intent
☒ Subsequent Report
☐ Final Abandonment Notice

TYPE OF ACTION


- ☐ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☒ Other Resume drilling, surface casing & cement
☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Resumed drilling a 14-3/4" hole with rotary tools at 7:30 PM 2-12-97.

TD 927'. Reached TD at 4:00 PM 2-14-97. Ran and landed 21 joints of 11-3/4" 42# 8rd H40 ST&C (905.77') of casing set at 922'. 1-Texas Pattern notched guide shoe set at 922'. Insert float set at 878'. Cemented with 500 sacks 65-35-6, 5#/sack gilsonite, 1/4#/sack celloseal and 2% CaCl₂ (yield 1.19, weight 12.6). Tailed in with 250 sacks "C" and 2% CaCl₂ (yield 1.32, weight 14.8). PD 11:30 PM 2-14-97. Bumped plug to 750 psi. Shut in 4 hours. Circulated 50 sacks to pit. WOC. Backed out landing joint and screwed in drilling nipple. Drilled out at 4:00 PM 2-15-97. WOC 16 hours and 30 minutes. Reduced hole to 11". Resumed drilling. NOTE: Notified BLM-Roswell of cementing - did not witness.

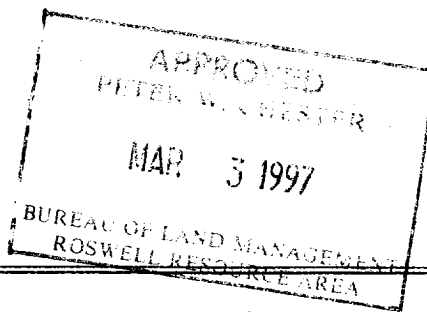

RECEIVED

FEB 26 '97

BLM
ROSWELL, NM

14. I hereby certify that the foregoing is true and correct

Signed

Title Operations Technician

Date Feb. 25, 1997

(This space for Federal or State office use)

Approved by
Conditions of approval, if any:

Title

Date